

Characteristics

Material

Sheet Steel (EN 10130 DC01)

■ Body : 1.2 / 1.5 mm

■ Door : 1.2 / 1.5 mm

Galvanized Steel (EN 10346 DX51D+Z)

■ Mounting plate : 1.5 - 2 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating

■ IP65 (TS 3033, EN 60529)

Others

■ Fully welded construction

■ Solid / glazed door

■ Foamed-in door PU sealing gasket

■ 135° concealed hinges

■ 5mm Double-bit insert polyamide lock

■ Bottom gland plate

■ One piece PE gasket for gland plate



On Request

■ Special sizes

■ Special colour

■ Pre-punching



Supply Includes

■ Body

■ Door (Select ≈ K)

■ Mounting plate (Option ≈ M)

■ Cover plate set (Option ≈ P)

■ Gland plate with gasket

■ 4/6 pcs wall brackets

Complementary Accessories

■ Rain canopy

■ Support base

■ DIN rail

■ Cover plate and profiles

■ Standoff

■ Door inside mounting profile


■ Pole fitting set

■ Plastic cover plate

■ Special locks and keys

■ Earthing cable


Width	Height	Depth	Reference	Door	Lock Type	Lock	Hinge	Wall Bracket	Weight	Application Options				
										Glazed Door	Cover Plate System	Standard Cover Plate Set	Rain Canopy	Support Base
A	B	C		pcs	*	pcs	pcs	pcs	**	Y / N	Y / N	Y / N	Y / N	Y / N
300	300	150	ETS xxx 030315	1	C	1	2	4	6.5	✓	–	–	✓	✓
		200	ETS xxx 030320	1	C	1	2	4	7.4	✓	✓	✓	✓	✓
	400	150	ETS xxx 030415	1	C	1	2	4	8.2	✓	–	–	✓	✓
		200	ETS xxx 030420	1	C	1	2	4	9.0	✓	✓	✓	✓	✓
400	300	150	ETS xxx 030415	1	C	1	2	4	8.2	✓	–	–	✓	✓
		200	ETS xxx 030420	1	C	1	2	4	9.0	✓	✓	✓	✓	✓
	400	150	ETS xxx 030415	1	C	1	2	4	8.2	✓	–	–	✓	✓
		200	ETS xxx 030420	1	C	1	2	4	9.0	✓	✓	✓	✓	✓
400	400	200	ETS xxx 040420	1	C	1	2	4	11.2	✓	✓	✓	✓	✓
		200	ETS xxx 040520	1	C	1	2	4	13.4	✓	✓	✓	✓	✓
	600	200	ETS xxx 040620	1	C	2	2	4	14.8	✓	✓	✓	✓	✓
		250	ETS xxx 040625	1	C	2	2	4	16.7	✓	✓	–	✓	✓
500	400	200	ETS xxx 040820	1	C	2	3	6	18.7	✓	✓	✓	✓	✓
		200	ETS xxx 050520	1	C	1	2	4	16.0	✓	✓	✓	✓	✓
	700	200	ETS xxx 050720	1	C	2	3	4	21.2	✓	✓	✓	✓	✓
		250	ETS xxx 050725	1	C	2	3	4	22.9	✓	✓	–	✓	✓
600	500	200	ETS xxx 050820	1	C	2	3	6	23.9	✓	✓	✓	✓	✓
		200	ETS xxx 060620	1	C	2	2	4	22.1	✓	✓	✓	✓	✓
	800	200	ETS xxx 060820	1	C	2	3	6	28.0	✓	✓	✓	✓	✓
		250	ETS xxx 060825	1	C	2	3	6	29.5	✓	✓	–	✓	✓
800	600	200	ETS xxx 061020	1	C	2	3	6	34.6	✓	✓	✓	✓	✓
		250	ETS xxx 061025	1	C	2	3	6	37.0	✓	✓	–	✓	✓
	800	200	ETS xxx 080820	1	C	2	3	6	35.2	✓	–	–	✓	✓
		300	ETS xxx 081030	1	C	2	4	6	49.5	✓	–	–	✓	✓

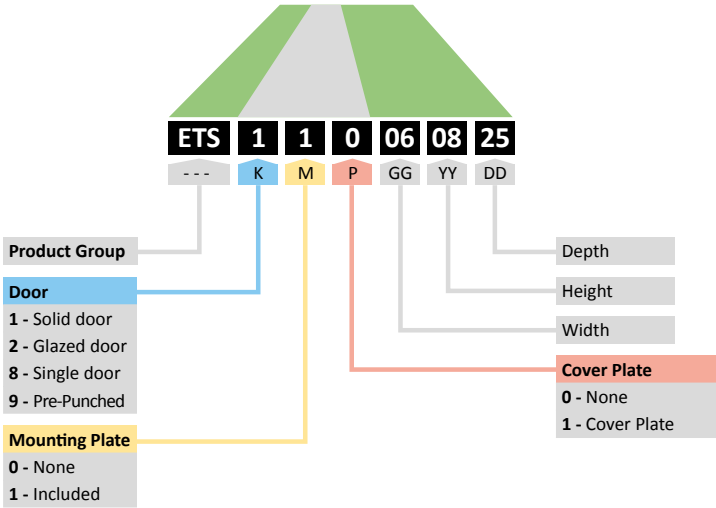


* C: Quarter Turn
** For ETS 110 GG YY DD

				
			K → Solid Door	Solid Door
			M → Mounting Plate	-- --
			P → -- --	Cover Plate
Width	Height	Depth	Door	Reference
A	B	C	ad	
mm	mm	mm		
300	300	150	1	ETS 110 030315
		200	1	ETS 110 030320
	400	150	1	ETS 110 030415
		200	1	ETS 110 030420
	500	200	1	ETS 110 030520
400	400	200	1	ETS 110 040420
	500	200	1	ETS 110 040520
	600	200	1	ETS 110 040620
		250	1	ETS 110 040625
	800	200	1	ETS 110 040820
500	500	200	1	ETS 110 050520
	700	200	1	ETS 110 050720
		250	1	ETS 110 050725
	800	200	1	ETS 110 050820
600	600	200	1	ETS 110 060620
	800	200	1	ETS 110 060820
		250	1	ETS 110 060825
	1000	200	1	ETS 110 061020
		250	1	ETS 110 061025
800	800	200	1	ETS 110 080820
	1000	300	1	ETS 110 081030


		
Glazed Door	Glazed Door	Pre-Punched Door
Mounting Plate	-- --	Mounting Plate
-- --	Cover Plate	-- --
Reference	Reference	Reference
ETS 210 030315	-- --	ETS 910 030315
ETS 210 030320	ETS 201 030320	ETS 910 030320
ETS 210 030415	-- --	ETS 910 030415
ETS 210 030420	ETS 201 030420	ETS 910 030420
ETS 210 030520	ETS 201 030520	ETS 910 030520
ETS 210 040420	ETS 201 040420	ETS 910 040420
ETS 210 040520	ETS 201 040520	ETS 910 040520
ETS 210 040620	ETS 201 040620	ETS 910 040620
ETS 210 040625	-- --	ETS 910 040625
ETS 210 040820	ETS 201 040820	ETS 910 040820
ETS 210 050520	ETS 201 050520	ETS 910 050520
ETS 210 050720	ETS 201 050720	ETS 910 050720
ETS 210 050725	-- --	ETS 910 050725
ETS 210 050820	ETS 201 050820	ETS 910 050820
ETS 210 060620	ETS 201 060620	ETS 910 060620
ETS 210 060820	ETS 201 060820	ETS 910 060820
ETS 210 060825	-- --	ETS 910 060825
ETS 210 061020	ETS 201 061020	ETS 910 061020
ETS 210 061025	-- --	ETS 910 061025
ETS 210 080820	-- --	ETS 910 080820
ETS 210 081030	-- --	ETS 910 081030

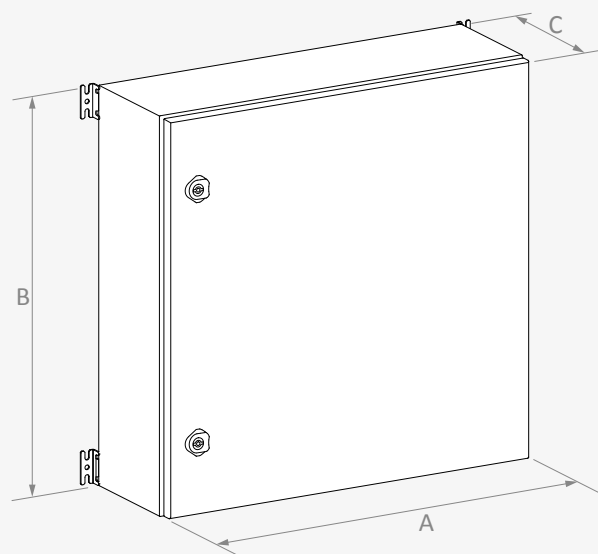


WALL MOUNTING

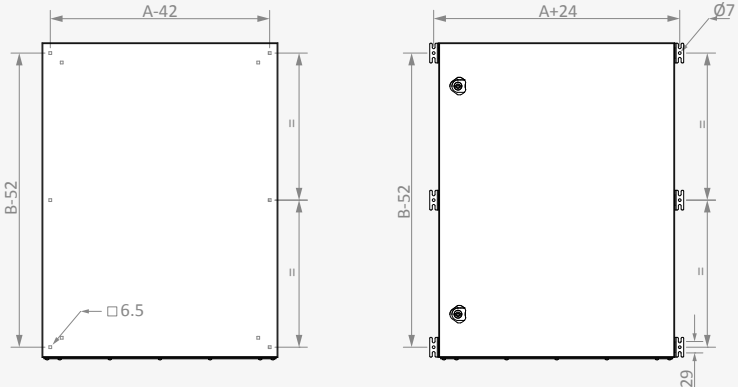


MOUNTING PLATE

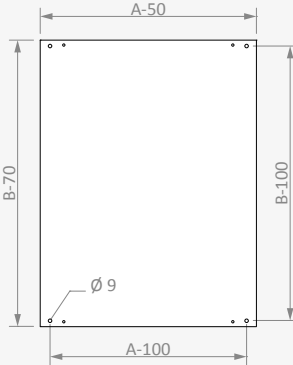


SOLID DOOR USEFUL AREA

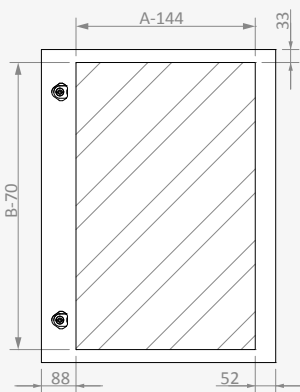


GLAZED DOOR APPARENT AREA

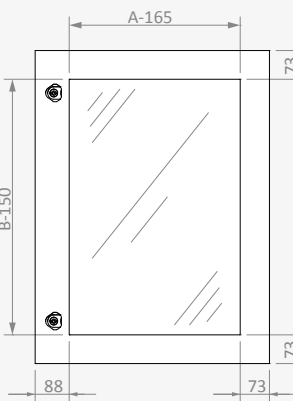

DEPTH DIMENSIONS

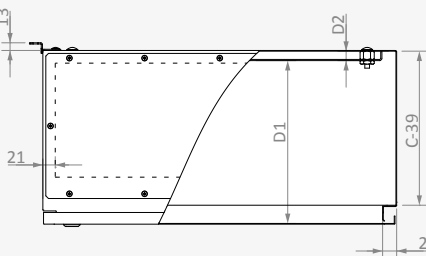

Width	Depth	D1	D2	F	Y1	Y2
A	C					
A < 600	150	129	13	59	45	23
	200	179	13	109	80	38
	300	279	13	193	160	38
A ≥ 600	200	176	16	109	80	38
	300	276	16	193	160	38

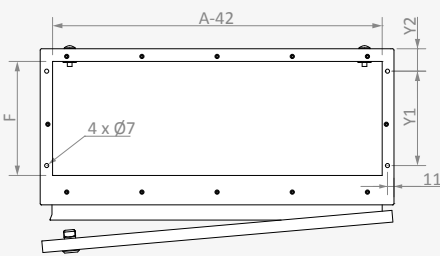


Width	Height	Depth	Reference	Useful Area			Glazed Door Apparent Area		Gland Plate			Wall Mounting				Mounting Plate	
				Door		Side	↔	↕	#	↔	↗	With Bracket		Internal		↔	↕
				↔	↕	↗						↔	↕	↔	↕		
mm	mm	mm		mm	mm	mm	mm	mm	pcs	mm	mm	mm	mm	mm	mm	mm	mm
300	300	150	ETS xxx 030315	156	230	127	135	150	1	260	60	324	248	258	248	250	230
		200	ETS xxx 030320	156	230	177	135	150	1	260	110	324	248	258	248	250	230
	400	150	ETS xxx 030415	156	330	127	135	250	1	260	60	324	348	258	348	250	330
		200	ETS xxx 030420	156	330	177	135	250	1	260	110	324	348	258	348	250	330
400	500	200	ETS xxx 030520	156	430	177	135	350	1	260	110	324	448	258	448	250	430
		400	ETS xxx 040420	256	330	177	235	250	1	360	110	424	348	358	348	350	330
	600	200	ETS xxx 040520	256	430	177	235	350	1	360	110	424	448	358	448	350	430
		250	ETS xxx 040620	256	530	177	235	450	1	360	110	424	548	358	548	350	530
500	800	200	ETS xxx 040625	256	530	227	235	450	1	360	160	424	548	358	548	350	530
		250	ETS xxx 040820	256	730	177	235	650	1	360	110	424	748	358	748	350	730
	500	200	ETS xxx 050520	356	430	177	335	350	1	460	110	524	448	458	448	450	430
		250	ETS xxx 050720	356	630	177	335	550	1	460	110	524	648	458	648	450	630
600	800	200	ETS xxx 050725	356	630	227	335	550	1	460	160	524	648	458	648	450	630
		250	ETS xxx 050820	356	730	177	335	650	1	460	110	524	748	458	748	450	730
	600	200	ETS xxx 060620	456	530	177	435	450	1	560	110	624	548	558	548	550	530
		250	ETS xxx 060820	456	730	177	435	650	1	560	110	624	748	558	748	550	730
800	1000	200	ETS xxx 060825	456	730	227	435	650	1	560	160	624	748	558	748	550	730
		250	ETS xxx 061020	456	930	177	435	850	1	560	110	624	948	558	948	550	930
	800	200	ETS xxx 061025	456	930	227	435	850	1	560	160	624	948	558	948	550	930
		300	ETS xxx 080820	656	730	177	635	650	1	760	110	824	748	758	748	750	730
800	1000	300	ETS xxx 081030	656	930	277	635	850	1	760	210	824	948	758	948	750	930

SOLID DOOR

Reference	Width		Height		Useful Area		Door	Lock Type	Lock	Hinge	Door Thickness	Weight
	A mm	B mm	W1 mm	H1 mm	W1 mm	H1 mm						
ETS KP 0303	300	300	156	230	1	2	1	C	1	2	1.2	1.1
ETS KP 0304	300	400	156	330	1	2	1	C	1	2	1.2	1.5
ETS KP 0305	300	500	156	430	1	2	1	C	1	2	1.2	1.8
ETS KP 0404	400	400	256	330	1	2	1	C	1	2	1.2	1.9
ETS KP 0405	400	500	256	430	1	2	1	C	1	2	1.2	2.4
ETS KP 0406	400	600	256	530	1	2	1	C	2	2	1.2	2.8
ETS KP 0408	400	800	256	730	1	3	1	C	2	3	1.2	3.7
ETS KP 0505	500	500	356	430	1	2	1	C	1	2	1.2	2.9
ETS KP 0507	500	700	356	630	1	3	1	C	2	3	1.2	4.0
ETS KP 0508	500	800	356	730	1	3	1	C	2	3	1.2	4.6
ETS KP 0606	600	600	456	530	1	2	1	C	2	2	1.2	4.1
ETS KP 0608	600	800	456	730	1	3	1	C	2	3	1.2	5.4
ETS KP 0610	600	1000	456	930	1	3	1	C	2	3	1.2	6.7
ETS KP 0808	800	800	656	730	1	3	1	C	2	3	1.2	7.1
ETS KP 0810	800	1000	656	930	1	4	1	C	2	4	1.5	11.1

Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Double door gutter gasket	

* C: Quarter Turn

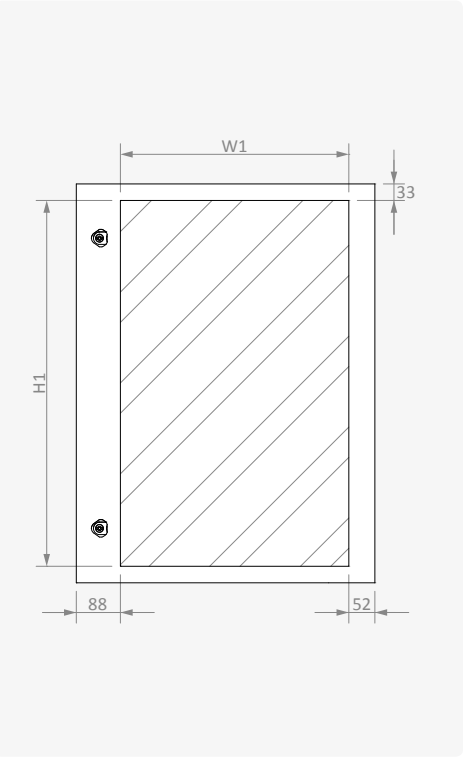


GLAZED DOOR

Reference	Width	Height	Apparent Area		Lock Type	Lock	Hinge	Door Thickness	Weight
	A mm	B mm	W6 mm	H6 mm					
ETS KPX 0303	300	300	135	150	C	1	2	1.2	1.20
ETS KPX 0304	300	400	135	250	C	1	2	1.2	1.60
ETS KPX 0305	300	500	135	350	C	1	2	1.2	2.00
ETS KPX 0404	400	400	235	250	C	1	2	1.2	2.10
ETS KPX 0405	400	500	235	350	C	1	2	1.2	2.60
ETS KPX 0406	400	600	235	450	C	2	2	1.2	3.10
ETS KPX 0408	400	800	235	650	C	2	3	1.2	4.10
ETS KPX 0505	500	500	335	350	C	1	2	1.2	3.20
ETS KPX 0507	500	700	335	550	C	2	3	1.2	4.40
ETS KPX 0508	500	800	335	650	C	2	3	1.2	5.10
ETS KPX 0606	600	600	435	450	C	2	2	1.2	4.50
ETS KPX 0608	600	800	435	650	C	2	3	1.2	6.00
ETS KPX 0610	600	1000	435	850	C	2	3	1.2	7.40
ETS KPX 0808	800	800	635	650	C	2	3	1.2	7.80
ETS KPX 0810	800	1000	635	850	C	2	4	1.5	10.70

Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass	Lock	
Surface Finishing	RAL7035w powder coating	* C: Quarter Turn	


Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass	Lock	
Surface Finishing	RAL7035w powder coating	* C: Quarter Turn	

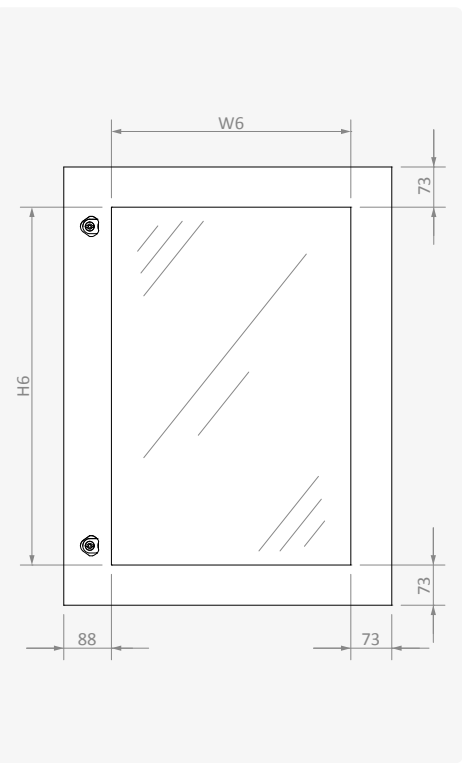

MOUNTING PLATE

Reference	Width		Height			External Dimensions			Mounting Dimensions			Thickness	Weight
	A	B	mm	mm	mm	X1	Y1	Z	X2	Y2	D		
	mm	mm				mm	mm	mm	mm	mm	mm	mm	kg
ETS TS 0203	200	300				150	230	12	Merkez	200	M6	1.5	0.6
ETS TS 0303	300	300				250	230	12	Merkez	200	M6	1.5	1.0
ETS TS 0304	300	400				250	330	12	Merkez	300	M6	1.5	1.4
ETS TS 0305	300	500				250	430	12	Merkez	400	M6	1.5	1.8
ETS TS 0403	400	300				350	230	12	300	200	M6	1.5	1.3
ETS TS 0404	400	400				350	330	12	300	300	M6	1.5	1.9
ETS TS 0405	400	500				350	430	12	300	400	M6	1.5	2.5
ETS TS 0406	400	600				350	530	12	300	500	M6	1.5	3.1
ETS TS 0505	500	500				450	430	12	400	400	M6	1.5	3.3
ETS TS 0506	500	600				450	530	12	400	500	M6	1.5	4.0
ETS TS 0507	500	700				450	630	12	400	600	M6	1.5	4.8
ETS TS 0604	600	400				550	330	15	500	300	M8	1.5	3.2
ETS TS 0606	600	600				550	530	15	500	500	M8	1.5	5.0
ETS TS 0608	600	800				550	730	15	500	700	M8	1.5	6.9
ETS TS 0610	600	1000				550	930	15	500	900	M8	1.5	8.7
ETS TS 0808	800	800				750	730	15	700	700	M8	1.5	8.8
ETS TS 0810	800	1000				750	930	15	700	900	M8	2.0	11.7


Characteristics	
■ Material	DIN EN 10346 DX51D+Z galvanized
■ Thickness	1.5 - 2 mm

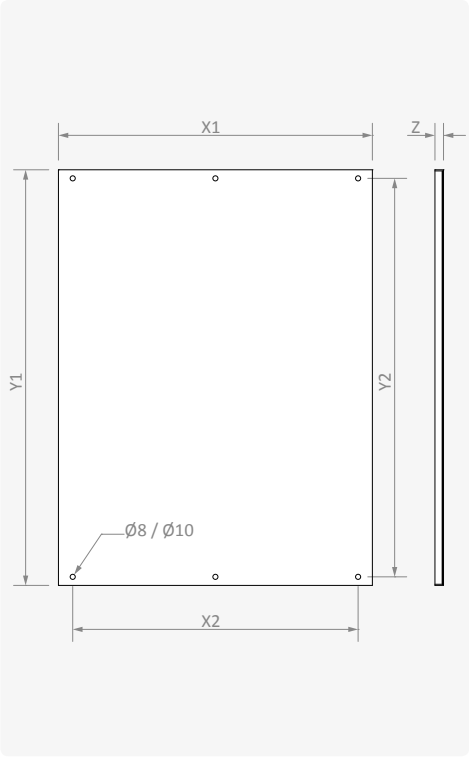

STANDARD COVER PLATE SET

Reference	Width	Height	Cover Plate Quantity	Capacity	Module Cut-Out		Solid Cover Plate			
	A	B					Height	Height	Height	Height
	mm	mm			pcs	Module	120	160	100	120
ETS PT 0303	300	300	2	12		1		1		
ETS PT 0304	300	400	3	24	1	1	1			
ETS PT 0305	300	500	4	24	1	1	2			
ETS PT 0404	400	400	3	36	1	1	1			
ETS PT 0405	400	500	4	36	1	1	2			
ETS PT 0406	400	600	4	54	1	2			1	
ETS PT 0408	400	800	6	72	2	2	1	1		
ETS PT 0505	500	500	3	48		2				1
ETS PT 0507	500	700	5	72	1	2		2		
ETS PT 0508	500	800	6	96	2	2	1	1		
ETS PT 0606	600	600	4	87	1	2			1	
ETS PT 0608	600	800	6	116	2	2	1	1		
ETS PT 0610	600	1000	7	145	1	4	1	1		

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Cover plates / Cover plate profiles	
■ Surface Finishing	RAL7035w powder coating	■ Cover plate profile fasteners	




COVER PLATES

Reference	Width	External Dimensions		Useful Area	Module Cut-Out		Weight
	A mm	X1 mm	Y1 mm	X2 mm	X3 mm	Capacity Module	
ETS PL 3010	300	268	98	225	-	-	0.3
ETS PL 3012	300	268	118	225	-	-	0.3
ETS PL 3014	300	268	138	225	-	-	0.3
ETS PL 3016	300	268	158	225	-	-	0.4
ETS PL 4010	400	368	98	325	-	-	0.3
ETS PL 4012	400	368	118	325	-	-	0.4
ETS PL 4014	400	368	138	325	-	-	0.4
ETS PL 4016	400	368	158	325	-	-	0.5
ETS PL 5010	500	468	98	425	-	-	0.4
ETS PL 5012	500	468	118	425	-	-	0.4
ETS PL 5014	500	468	138	425	-	-	0.5
ETS PL 5016	500	468	158	425	-	-	0.7
ETS PL 6010	600	568	98	525	-	-	0.5
ETS PL 6012	600	568	118	525	-	-	0.6
ETS PL 6014	600	568	138	525	-	-	0.6
ETS PL 6016	600	568	158	525	-	-	0.8
ETS PL 3012W	300	268	118	-	215	12	0.2
ETS PL 3016W	300	268	158	-	215	12	0.3
ETS PL 4012W	400	368	118	-	320	18	0.3
ETS PL 4016W	400	368	158	-	320	18	0.4
ETS PL 5012W	500	468	118	-	425	24	0.4
ETS PL 5016W	500	468	158	-	425	24	0.5
ETS PL 6012W	600	568	118	-	515	29	0.4
ETS PL 6016W	600	568	158	-	515	29	0.6

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	0.9 mm


Supply Includes	
■ Cover plate profiles fasteners and plastic nuts	
■ Handles	

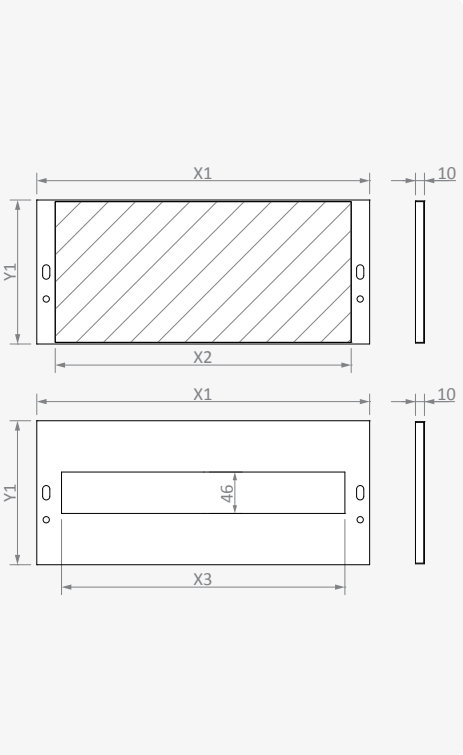

COVER PLATE PROFILE

Reference	Height	External Dimensions	Packet	Weight
	B mm			
ETS PR 030	300	250	2	0.7
ETS PR 040	400	350	2	1.0
ETS PR 050	500	450	2	1.3
ETS PR 060	600	550	2	1.5
ETS PR 070	700	650	2	1.8
ETS PR 080	800	750	2	2.1
ETS PR 100	1000	950	2	2.6

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.2 mm

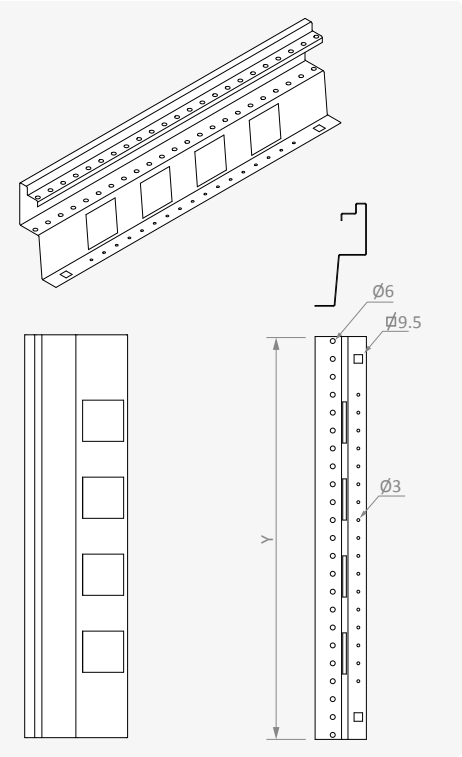


RAIN CANOPY

Reference	Width		Depth		External Dimensions		Mounting Dimensions			Weight kg
	A	C			X1	Z1	X2	Z2	Z3	
	mm	mm			mm	mm	mm	mm	mm	
ETS HS 0315	300	150			325	175	278	45	23	1.1
ETS HS 0320	300	200			325	225	278	80	38	1.6
ETS HS 0415	400	150			425	175	378	45	23	1.6
ETS HS 0420	400	200			425	225	378	80	38	2.0
ETS HS 0425	400	250			425	275	378	110	38	2.6
ETS HS 0520	500	200			525	225	478	80	38	2.4
ETS HS 0620	600	200			625	225	578	80	38	2.7
ETS HS 0625	600	250			625	275	578	110	38	3.5
ETS HS 0820	800	200			825	225	778	80	38	3.6
ETS HS 0830	800	300			825	325	778	160	38	4.7

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.2 mm

Supply Includes	
■ Mounting fasteners	

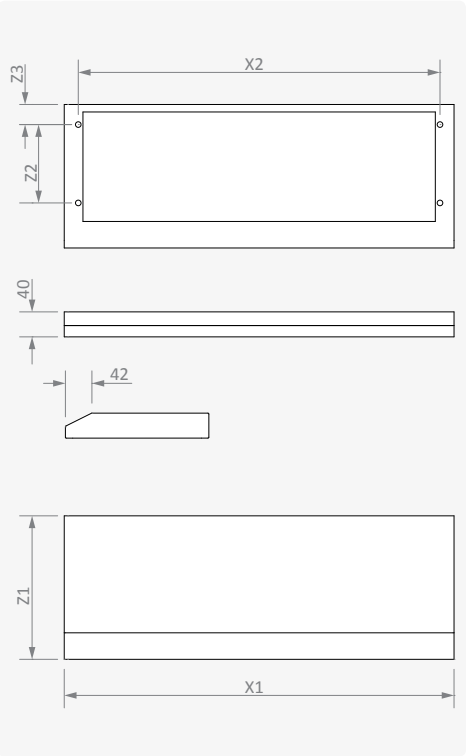


SUPPORT BASE

Reference	Width		Depth		External Dimensions		Mounting Dimensions				Weight kg
	A	C			X1	Z1	X2	Z2	X3	Z3	
	mm	mm			mm	mm	mm	mm	mm	mm	
ETS AT 3015	300	150			445	255	300	110	278	45	2.8
ETS AT 3020	300	200			445	305	300	160	278	80	2.9
ETS AT 4015	400	150			545	255	400	110	378	45	3.0
ETS AT 4020	400	200			545	305	400	160	378	80	3.1
ETS AT 4025	400	250			545	355	400	160	378	110	3.4
ETS AT 5020	500	200			645	305	500	160	478	80	3.4
ETS AT 6020	600	200			745	305	600	160	578	80	3.6
ETS AT 6025	600	250			745	355	600	160	578	110	3.9
ETS AT 8020	800	200			945	305	800	160	778	80	4.1
ETS AT 8030	800	300			945	405	800	260	778	160	4.4


Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm

Supply Includes	
■ Mounting fasteners	

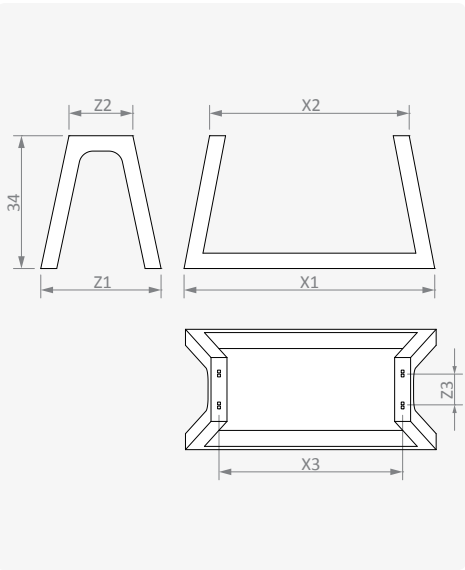

WALL BRACKETS

Reference	Packet		Weight		Characteristics		Supply Includes	
	pcs/packet		kg/packet		■ Material	DIN EN 10130 DC01 CCRS	■ Wall mounting screws	
					■ Surface Finishing	Zinc coated Cr ³⁺ passivation		
AK KL 0010	4		0.16		■ Thickness	2 mm		
AK KL 0011	6		0.25					

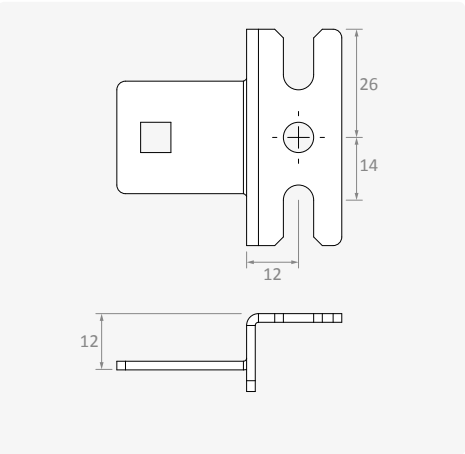


CABLE GLAND PLATE

Reference	Width	Depth	External Dimensions		Useful Area		Weight kg
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
ETS GP 3015	300	150	290	96	260	60	0.4
ETS GP 3020	300	200	290	146	260	110	0.6
ETS GP 4015	400	150	390	96	360	59	0.5
ETS GP 4020	400	200/250	390	146	360	110	0.7
ETS GP 5020	500	200/250	490	146	460	110	0.9
ETS GP 6020	600	200/250	590	146	560	110	1.1
ETS GP 8020	800	200	790	146	760	110	1.4
ETS GP 8030	800	300	790	246	760	193	2.4

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.5 mm


Supply Includes	
■ One piece PE gasket	
■ Mounting fasteners	

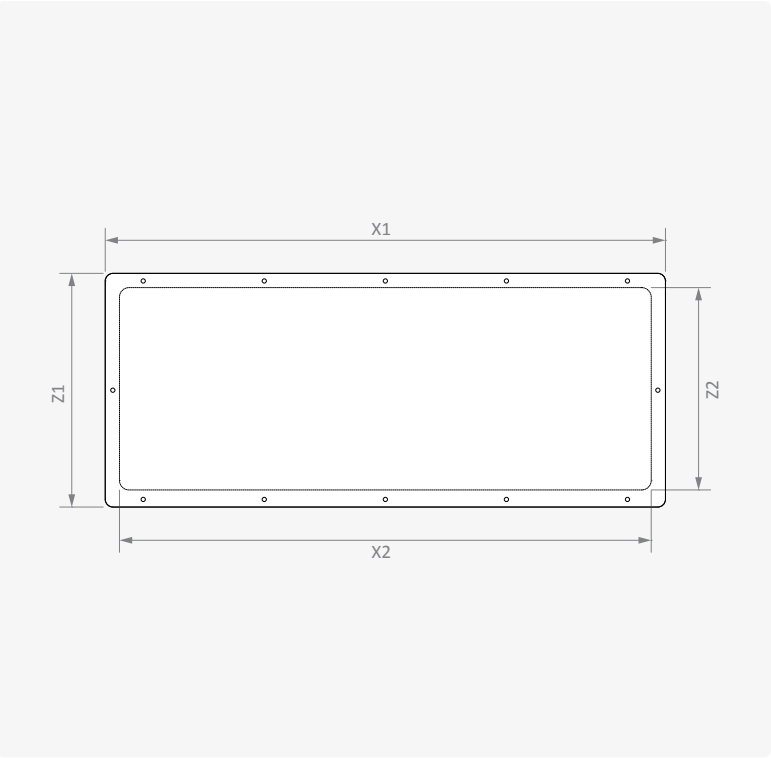

MOUNTING PROFILE INSIDE DOOR

Reference	Height B	Length Y1	Weight
AS KU Y00400	300	220	1.1
AS KU Y00500	400	320	1.2
AS KU Y00600	500	420	0.3
AS KU DRM100	600	520	0.4
AS KU Y00800	700	620	0.4
AS KU D00900	800	720	0.5
AS KU DRM120	1000	920	0.6
AS KU DRM120	1150	920	0.6
AS KU DRM150	1200	1120	0.8


Characteristics	
■ Material	20x20 square profile galvanized
■ Thickness	1.2 mm

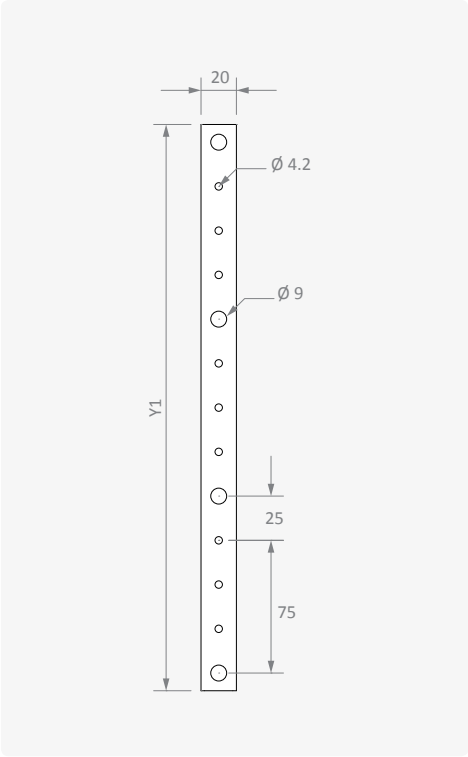

PLASTIC COVER PLATE

Reference	Width Module	Packet pcs/packet	Weight kg/packet
SI OP 00000010	4	50	0.35


Characteristics	
■ Material	ABS
	Separable 4 pieces



STANDOFF

Reference	External Dimensions	Width Across Flats	Connection	Packet	Weight
	H mm	L mm			
HD BM 00000196	25	13	M6 / M6	20	0.5
HD BM 00000200	50				1.1
HD BM 00000240	75				1.6
HD BM 00000210	125				2.3
HD BM 00000220	50	17	M8 / M8	20	1.8
HD BM 00000230	125				4.7


Characteristics	
■ Material	Hexagonal free-cutting steel
■ Surface Finishing	Zinc coated; Cr ³⁺ passivation
■ Connection	male/female

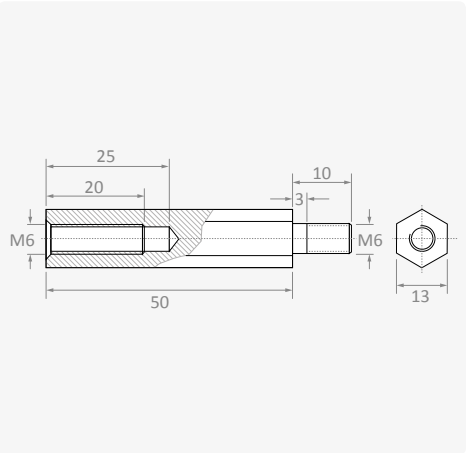

DIN RAILS


Reference	Width	Height	Hole	Length	Weight
	mm	mm	Yes/No	m	kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Zinc coated Cr ³⁺ passivation
■ Standards	DIN EN 60715

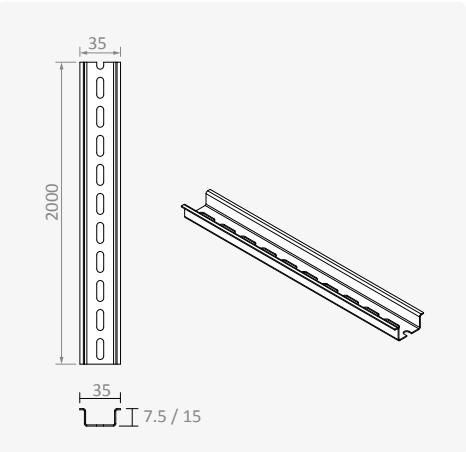

EARTHING CABLE

Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm			
KBOZ 06 01908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.2
KB TP 16092200	Nickel Plated, Braided Copper Conductor	16	200	M8-M8	10	0.3

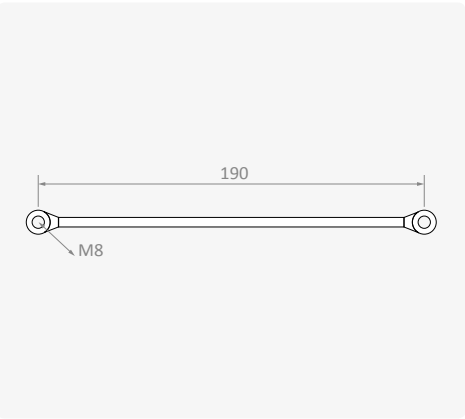

LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
	*	Casing	Cam	Key Type	
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn;
** Keys should be ordered separately.



SPECIAL LOCKS AND KEYS

Reference	Lock Type	Material		Description		Image #	Key Code
	*	Casing	Cam	Key Type	Casing Type		
KIMS 0601115211	C	Chrome Coated Zamak	Zinc coated steel	5mm Double-bit		1	KIAN 0100
KIEM D5KQ0ZS2M1	C	Black Powder Coated Zamak	Zinc coated steel	5mm Double-bit	Padlockable	2	KIAN 0100
KIMS 0601137211	C	Chrome Coated Zamak	Zinc coated steel	6.5mm Triangular		3	KIMSN 06737
KIMS 0601127211	C	Chrome Coated Zamak	Zinc coated steel	8mm Triangular		4	KIMSN 06738
KIMS 0601138211	C	Chrome Coated Zamak	Zinc coated steel	7mm Square		5	KIMSN 06727
KIMS 063110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key		6	KIM 55333
KIMS 065110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key	Wing Knob	7	KIM 55333
KIMS 0622021	C	Polyamide	Zinc coated steel	-	Wing Knob	8	-
KIMS 0621122	C	Chrome Coated Zamak	Zinc coated steel	-	Wing Knob	9	-
KIEM KEZQ0ZS2M0	C	Chrome Coated Zamak	Zinc coated steel	-	Padlockable	10	-

* C: Quarter Turn; You can see lock quantities of single door and double door enclosures on table at "Overview Page".
** Keys should be ordered separately.

