

Characteristics

- Material**
 Sheet Steel (EN 10130 DC01)
 ■ Body : 1.5 mm
 ■ Glazed door : 1.5 mm
- Surface Finishing**
 ■ RAL7035w powder coating
- IP Rating**
 ■ IP55 (TS 3033, EN 60529)
- Others**
 ■ 10 folded profile
 ■ Foamed-in door PU sealing gasket
 ■ Bottom gland plate
 ■ Removable rear panel
 ■ 5mm Double-bit insert polyamide lock

On Request

- Special sizes
- Special colour
- Pre-punching




Supply Includes

- Body
- Glazed door
- Rear panel
- Gland plate with gasket
- 4 pcs wall brackets

Complementary Accessories

- Patch panel
- 19" equipment shelf
- Earthing cable

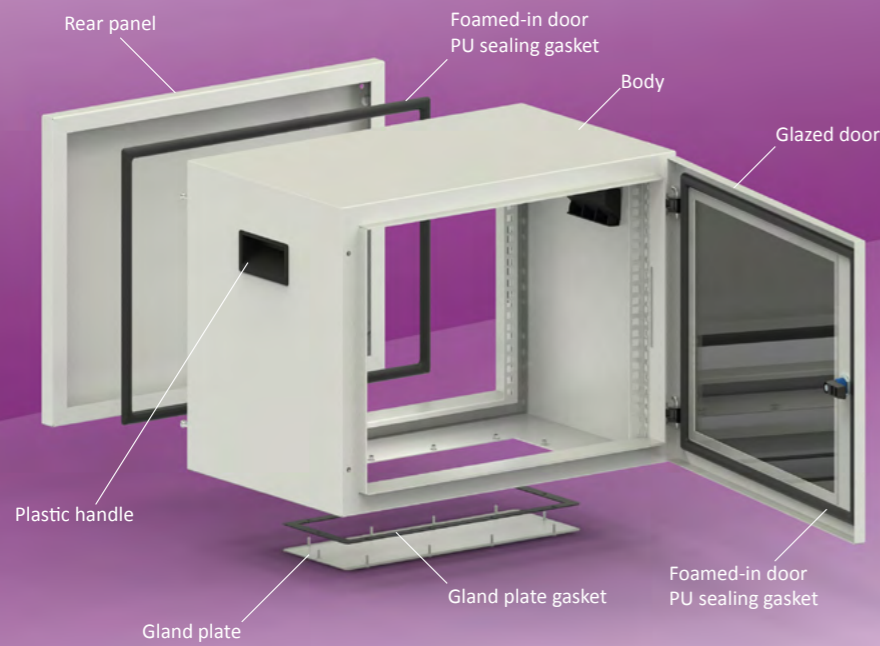

Height units	Width			Reference	Lock	Hinge	Apparent Area		Gland Plate			Wall Mounting		Weight
	A	B	C				↔	↕	#	↔	↗	↔	↕	
U*	mm	mm	mm		pcs	pcs	mm	mm	pcs	mm	mm	mm	mm	kg
6 U	553	332	400	MR 553340	1	2	409	223	1	358	114	577	280	15.8
9 U		464	400	MR 554640	1	2	409	355	1	358	114	577	412	19.0
12 U		597	400	MR 555940	1	2	409	488	1	358	114	577	545	22.5
15 U		730	400	MR 557340	1	2	409	621	1	358	114	577	678	25.4

* 1U = 44.45 mm

