



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)
■ Body : 1.2 mm
■ Lid : 1.2 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating


■ IP55 (TS 3033, EN 60529)

Others

■ All welded construction
■ Screwed plain lid
■ One piece EPDM lid gasket
■ Ready for DIN rail fixing

On Request

■ Custom sizes
■ Custom colour
■ Pre-punching

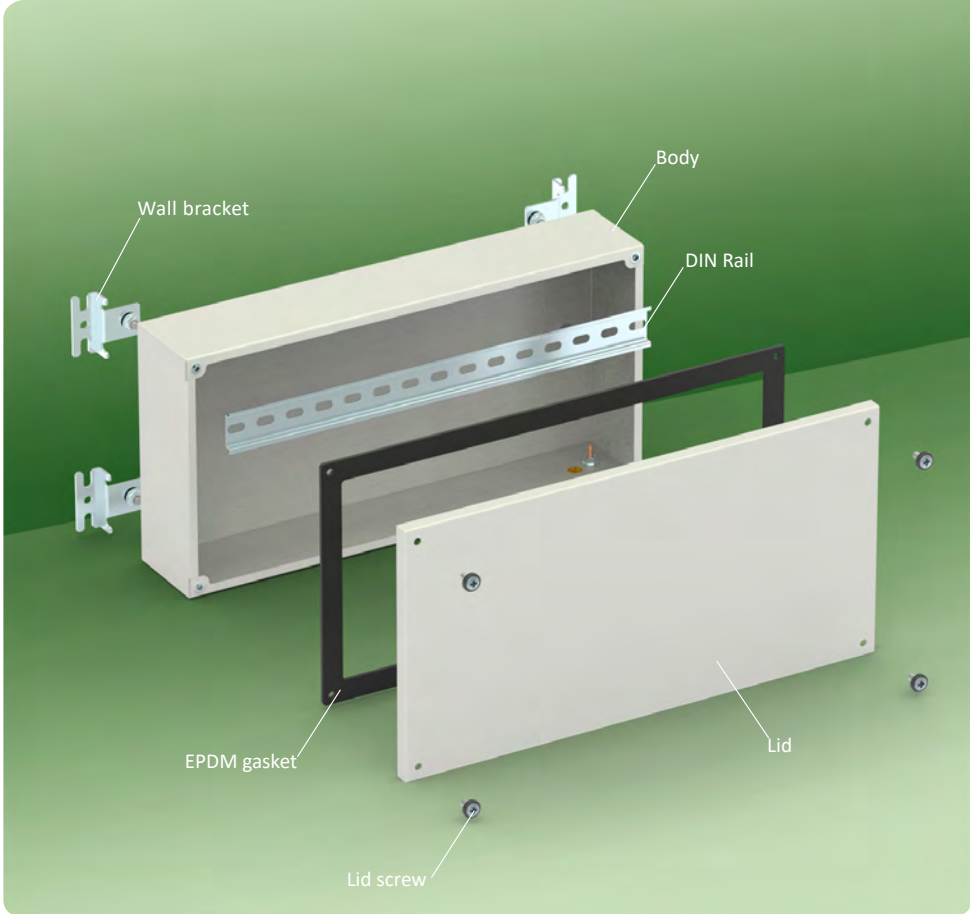





Supply Includes

■ Body
■ Lid
■ Lid gasket
■ Lid screws

Complementary Accessories

■ DIN rail
■ Wall bracket 2/4
■ Earthing cable


Width	Height	Depth	Reference	Useful Area			Wall Mounting						DIN Rail Fixing	Weight
A	B	C		Lid		Side	With Bracket				Internal		↔ mm	
				↔ mm	↕ mm	↗ mm	↔ mm	↕ mm	↔ mm	↕ mm	↔ mm	↕ mm		
mm	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
80	160	60	JB 081606	45	125	44	---	118	---	184	---	118	30	0.6
100	100	60	JB 101006	65	65	44	---	58	---	124	---	58	50	0.6
120	120	60	JB 121206	85	85	44	---	78	---	144	---	78	70	0.7
150	150	60	JB 151506	115	115	44	---	108	---	174	---	108	100	0.9
160	160	80	JB 161608	125	125	64	---	118	---	184	---	118	110	1.4
200	200	80	JB 202008	165	165	64	---	158	---	224	---	158	150	1.9
300	200	100	JB 302010	265	165	84	324	158	258	224	258	148	250	2.4
	300	100	JB 303010	265	265	84	324	258	258	324	258	248	2 x 250	3.2
400	200	100	JB 402010	365	165	84	424	158	358	224	358	148	350	2.8
	300	100	JB 403010	365	265	84	424	258	358	324	358	248	2 x 350	4.0
	400	100	JB 404010	365	365	84	424	358	358	424	358	348	2 x 350	5.0

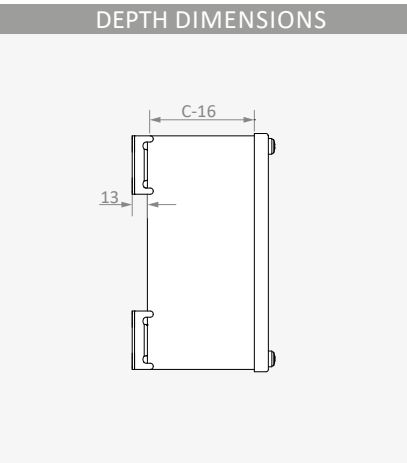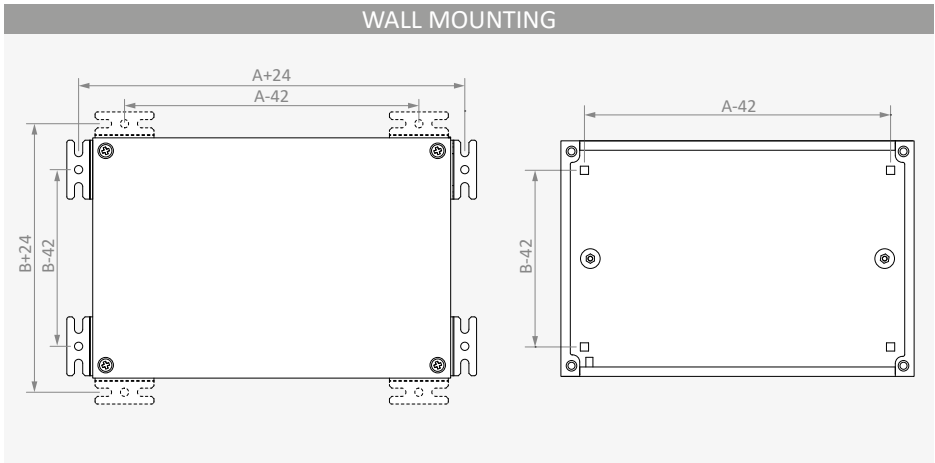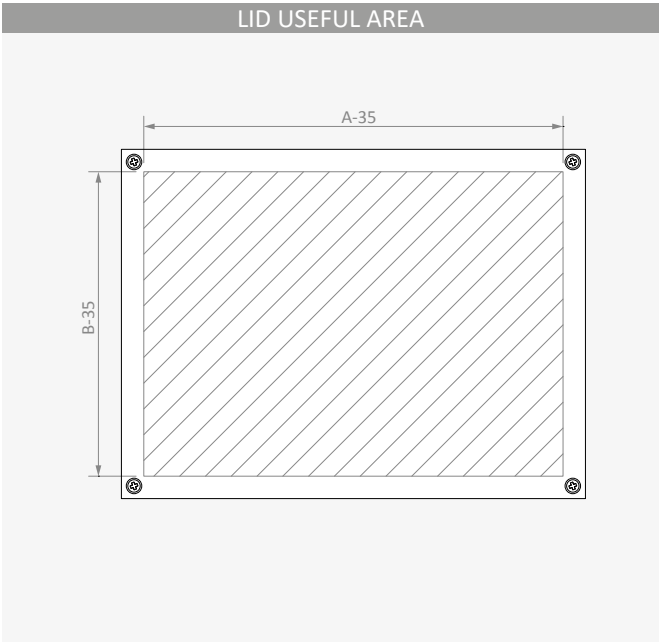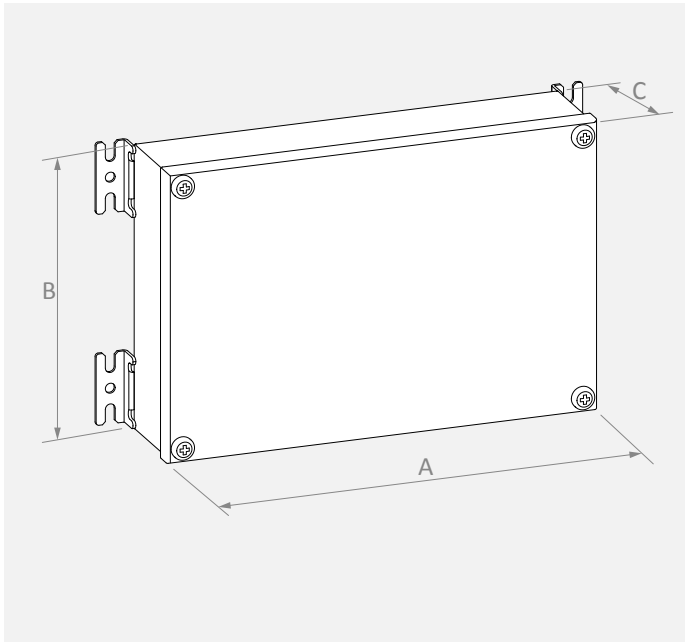

DIN RAILS


Reference	Width mm	Height mm	Hole Yes/No	Length m	Weight kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Zinc coated Cr ⁺³ passivation
■ Standards	DIN EN 60715

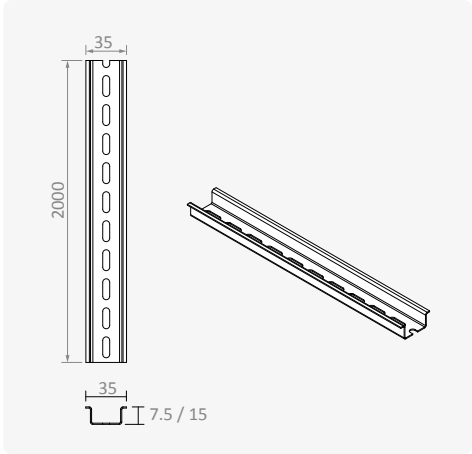


WALL BRACKETS

Reference	Packet pcs/package	Weight kg/package	Characteristics	Supply Includes
AK KL 0010	4	0.16	■ Material: DIN EN 10130 DC01 CCRS ■ Surface Finishing: Zinc coated Cr ⁺³ passivation ■ Thickness: 2 mm	■ Wall mounting screws

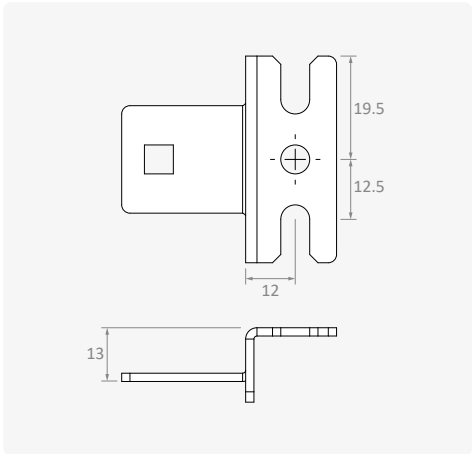



LID MOUNTING FASTENERS


Reference	Packet pcs/package	Weight kg/package	Supply Includes
AK AK JB 051210	50	0.17	■ 50 pcs M5 x 12 YSB screws ■ 50 pcs M5 Finishing washer

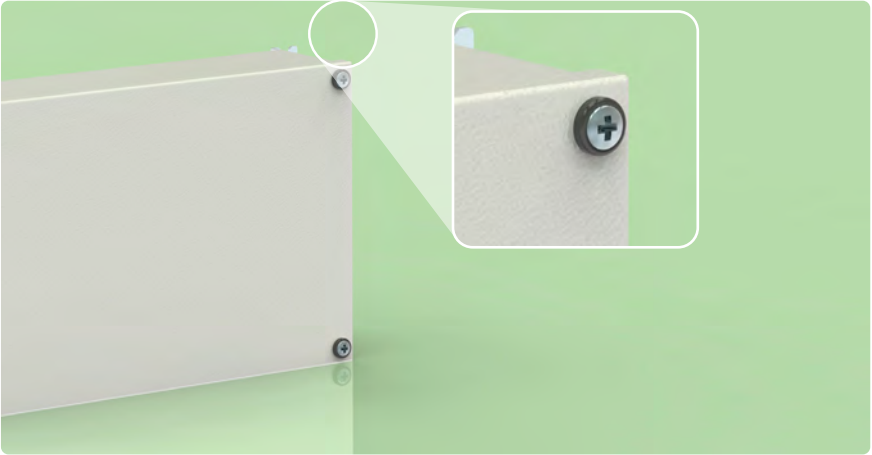

EARTHING CABLE

Reference	Material	Cross-Section mm ²	Length mm	Connection	Packet pcs/package	Weight kg/package
KB OZ 061908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.16

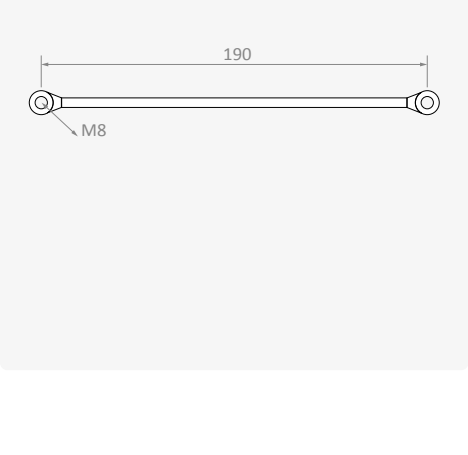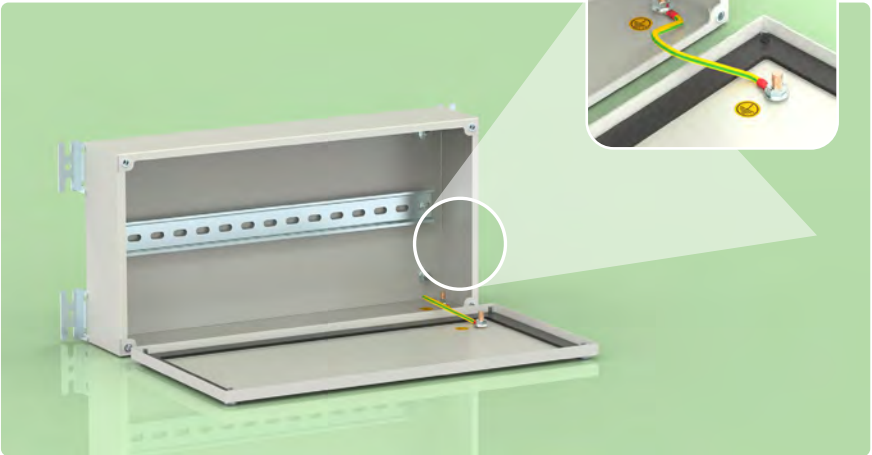



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

