



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)

■ Body : 1.2 / 1.5 mm

■ Door : 1.2 / 1.5 mm

Galvanized Steel (EN 10346 DX51D+Z)

■ Mounting plate : 1.5 - 2 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating

Single door enclosures

■ IP66 (TS 3033, EN 60529)

Double door enclosures

■ IP55 (TS 3033, EN 60529)

Glazed door enclosures

■ IP65 (TS 3033, EN 60529)

Others

■ All welded construction

■ Solid / glazed door

■ Foamed-in door PU sealing gasket

■ 155° concealed hinges

■ 5mm Double-bit insert polyamide lock

■ Top and bottom gland plates


■ One piece PE gasket for gland plate

On Request

■ Custom sizes

■ Custom colour

■ Pre-punching

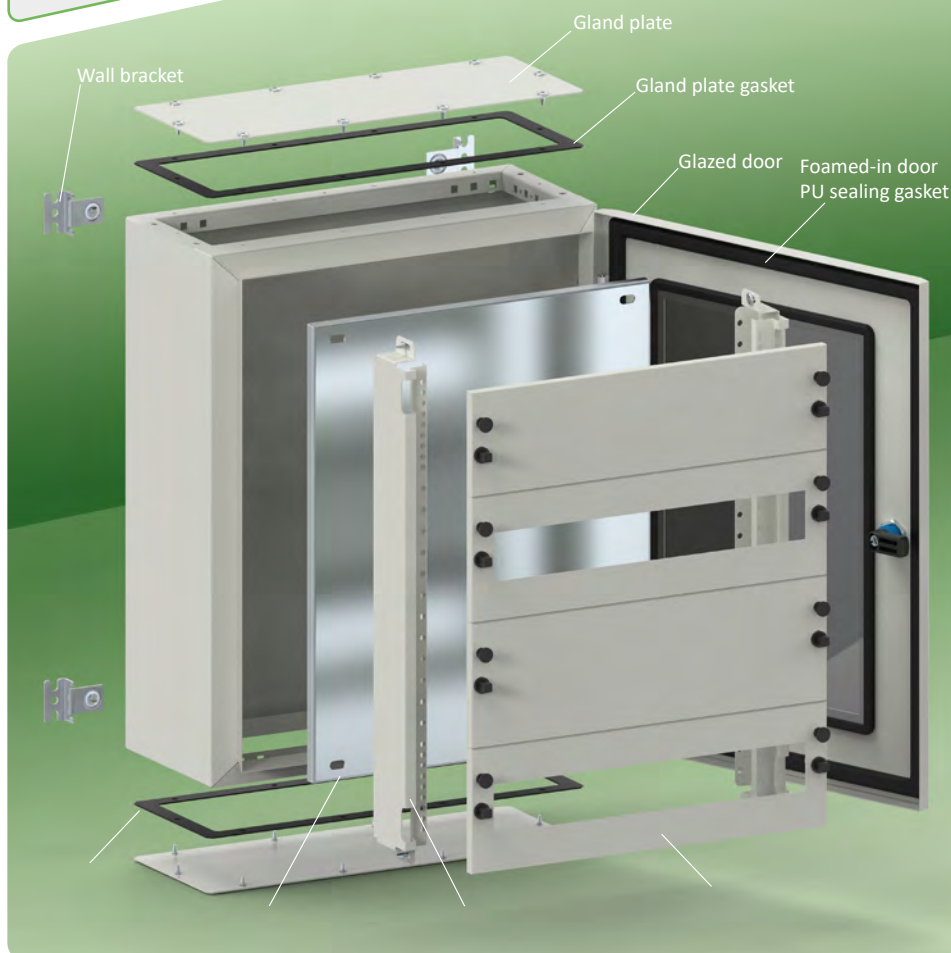


Supply Includes

- Body
- Door (Select ≈ **K**)
- Mounting plate (Option ≈ **M**)
- Cover plate set (Option ≈ **P**)
- Hinged inner door (Option ≈ **P**)
- 2 pcs gland plates with gasket
- 4/6 pcs wall brackets

Complementary Accessories

- Rain canopy
- Support base
- DIN rail
- Cover plate and profiles
- Standoff
- Door inside mounting profile
- Door stay
- Pole fitting set
- Plastic cover plate
- Special locks and keys
- Earthing cable

Width	Height	Depth	Reference	Door	Lock Type	Lock	Hinge	Wall Bracket	Weight **	Application Options				
										Glazed Door	Cover Plate System	Standard Cover Plate Set	Rain Canopy	Support Base
A	B	C		pcs	*	pcs	pcs	pcs	kg	Y / N	Y / N	Y / N	Y / N	Y / N
200	300	150	EKO xxx 020315	1	C	1	2	4	4.2	—	—	—	—	—
300	300	150	EKO xxx 030315	1	C	1	2	4	5.6	✓	—	—	✓	✓
		200	EKO xxx 030320	1	C	1	2	4	6.3	✓	✓	✓	✓	✓
	400	150	EKO xxx 030415	1	C	1	2	4	7.0	✓	—	—	✓	✓
		200	EKO xxx 030420	1	C	1	2	4	7.9	✓	✓	✓	✓	✓
400	500	200	EKO xxx 030520	1	C	1	2	4	9.4	✓	✓	✓	✓	✓
		300	EKO xxx 040315	1	C	1	2	4	7.1	✓	—	—	✓	✓
		200	EKO xxx 040420	1	C	1	2	4	9.8	✓	✓	✓	✓	✓
	400	250	EKO xxx 040425	1	C	1	2	4	10.0	✓	—	—	✓	✓
		150	EKO xxx 040515	1	C	1	2	4	10.5	✓	—	—	✓	✓
		200	EKO xxx 040520	1	C	1	2	4	11.6	✓	✓	✓	✓	✓
	600	250	EKO xxx 040525	1	C	1	2	4	12.0	✓	—	—	✓	✓
		200	EKO xxx 040620	1	C	2	2	4	13.5	✓	✓	✓	✓	✓
		250	EKO xxx 040625	1	C	2	2	4	14.0	✓	—	—	✓	✓
	800	300	EKO xxx 040630	1	C	2	2	4	15.6	✓	✓	✓	✓	✓
		200	EKO xxx 040820	1	C	2	3	4	18.7	✓	✓	✓	✓	✓
500	500	200	EKO xxx 050520	1	C	1	2	4	14.1	✓	✓	✓	✓	✓
		250	EKO xxx 050525	1	C	1	2	4	15.0	✓	—	—	✓	✓
		200	EKO xxx 050620	1	C	2	2	4	16.2	✓	✓	✓	✓	✓
	600	250	EKO xxx 050625	1	C	2	2	4	17.0	✓	—	—	✓	✓
		200	EKO xxx 050720	1	C	2	3	4	18.5	✓	✓	✓	✓	✓
		250	EKO xxx 050725	1	C	2	3	4	19.0	✓	—	—	✓	✓
	700	300	EKO xxx 050730	1	C	2	3	4	21.2	✓	✓	✓	✓	✓
		200	EKO xxx 050820	1	C	2	3	4	23.9	✓	✓	✓	✓	✓
		250	EKO xxx 050825	1	C	2	3	4	24.8	✓	—	—	✓	✓
	800	200	EKO xxx 060420	1	C	1	2	4	14.9	✓	✓	✓	✓	✓
		250	EKO xxx 060425	1	C	1	2	4	15.8	✓	—	—	✓	✓
		300	EKO xxx 060630	1	C	2	2	4	23.2	✓	✓	✓	✓	✓
600	800	200	EKO xxx 060820	1	C	2	3	4	26.2	✓	✓	✓	✓	✓
		250	EKO xxx 060825	1	C	2	3	4	27.0	✓	—	—	✓	✓
		300	EKO xxx 060830	1	C	2	3	4	29.0	✓	✓	✓	✓	✓
	1000	200	EKO xxx 061020	1	C	2	3	4	30.8	✓	✓	✓	✓	✓
		250	EKO xxx 061025	1	C	2	3	4	33.5	✓	—	—	✓	✓
		300	EKO xxx 061030	1	C	2	3	4	35.2	✓	✓	✓	✓	✓
	1200	250	EKO xxx 061225	1	C	2	4	4	37.5	✓	—	—	✓	✓
		300	EKO xxx 061230	1	C	2	4	4	39.7	✓	✓	✓	✓	✓
		200	EKO xxx 080620	1	C	2	3	4	26.3	✓	—	—	✓	✓
	800	300	EKO xxx 080630	2	C	2	3+3	4	28.3	✓	—	—	✓	✓
		200	EKO xxx 080820	1	C	2	3	4	31.0	✓	—	—	✓	✓
		250	EKO xxx 080825	1	C	2	3	4	35.0	✓	—	—	✓	✓
800	1000	300	EKO xxx 080830	1	C	2	3	4	37.5	✓	—	—	✓	✓
		250	EKO xxx 081025	1	C	2	4	4	40.0	✓	—	—	✓	✓
		300	EKO xxx 081030	1	C	2	4	4	45.3	✓	—	—	✓	✓
	1200	250	EKO xxx 081225	1	C	2	4	4	57.0	✓	—	—	✓	✓
		300	EKO xxx 081230	1	C	2	4	4	59.0	✓	—	—	✓	✓
		200	EKO xxx 106030	2	C	2	2+2	6	50.0	—	—	—	✓	✓
1000	1000	250	EKO xxx 101025	2	I	1	4+4	6	57.0	—	—	—	✓	✓
		300	EKO xxx 101030	2	I	1	4+4	6	60.0	—	—	—	✓	✓
	1200	250	EKO xxx 101225	2	I	1	4+4	6	67.8	—	—	—	✓	✓
		300	EKO xxx 101230	2	I	1	4+4	6	70.0	—	—	—	✓	✓
1200	1200	250	EKO xxx 121225	2	I	1	4+4	6	77.0	—	—	—	✓	✓
		300	EKO xxx 121230	2	I	1	4+4	6	80.0	—	—	—	✓	✓
	400	250	EKO xxx 101240	2	I	1	4+4	6	85.0	—	—	—	✓	✓
		300	EKO xxx 101240	2	I	1	4+4	6	85.0	—	—	—	✓	✓





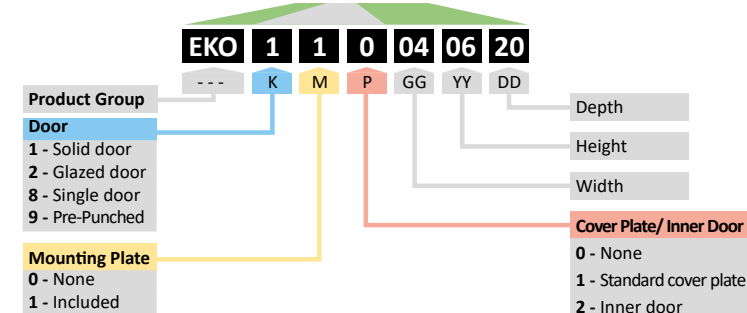


* C: Quarter Turn I: Escutcheon Rod-latch

** For EKO 110 GG YY DD

					
			K → M → P →	Solid Door Mounting Plate -- --	Solid Door Mounting Plate Inner Door -- --
Width	Height	Depth	Door	Reference	Reference
A	B	C	pcs		
mm	mm	mm			
200	300	150	1	EKO 110 020315	-- --
300	300	150	1	EKO 110 030315	-- --
		200	1	EKO 110 030320	EKO 112 030320
	400	150	1	EKO 110 030415	-- --
		200	1	EKO 110 030420	EKO 112 030420
		250	1	EKO 110 030520	EKO 112 030520
400	300	150	1	EKO 110 040315	-- --
		200	1	EKO 110 040420	EKO 112 040420
	400	150	1	EKO 110 040425	-- --
		200	1	EKO 110 040515	-- --
		250	1	EKO 110 040520	EKO 112 040520
	500	200	1	EKO 110 040525	-- --
		250	1	EKO 110 040620	EKO 112 040620
		300	1	EKO 110 040625	-- --
	600	250	1	EKO 110 040630	EKO 112 040630
		300	1	EKO 110 040630	EKO 112 040630
500	500	200	1	EKO 110 040820	EKO 112 040820
		250	1	EKO 110 050520	EKO 112 050520
	600	200	1	EKO 110 050525	-- --
		250	1	EKO 110 050620	EKO 112 050620
		300	1	EKO 110 050625	-- --
	700	200	1	EKO 110 050720	EKO 112 050720
		250	1	EKO 110 050725	-- --
		300	1	EKO 110 050730	EKO 112 050730
	800	200	1	EKO 110 050820	EKO 112 050820
		250	1	EKO 110 050820	EKO 112 050820
600	400	200	1	EKO 110 060420	EKO 112 060420
		250	1	EKO 110 060620	EKO 112 060620
	600	200	1	EKO 110 060625	-- --
		250	1	EKO 110 060630	EKO 112 060630
		300	1	EKO 110 060820	EKO 112 060820
	800	200	1	EKO 110 060825	-- --
		250	1	EKO 110 060830	EKO 112 060830
		300	1	EKO 110 060830	EKO 112 060830
	1000	200	1	EKO 110 061020	EKO 112 061020
		250	1	EKO 110 061025	-- --
800	600	200	1	EKO 110 061030	EKO 112 061030
		250	1	EKO 110 061225	-- --
	800	200	1	EKO 110 061230	EKO 112 061230
		250	1	EKO 110 080620	EKO 112 080620
		300	2	EKO 110 080630	EKO 112 080630
	1000	200	1	EKO 110 080820	EKO 112 080820
		250	1	EKO 110 080825	-- --
		300	1	EKO 110 080830	EKO 112 080830
	1200	250	1	EKO 110 081025	-- --
		300	1	EKO 110 081030	EKO 112 081030
1000	600	200	1	EKO 110 081225	-- --
		250	1	EKO 110 081230	EKO 112 081230
	800	200	2	EKO 110 100630	-- --
		250	2	EKO 110 101025	-- --
		300	2	EKO 110 101030	-- --
	1000	250	2	EKO 110 101225	-- --
		300	2	EKO 110 101230	-- --
	1200	250	2	EKO 110 121225	-- --
		300	2	EKO 110 121230	-- --
	1200	400	2	EKO 110 121240	-- --

			
Glazed Door Mounting Plate -- --	Glazed Door Mounting Plate Inner Door	Glazed Door -- -- Cover Plate	Pre-punched Door Mounting Plate -- --
Reference	Reference	Reference	Reference
---	-- --	---	---
EKO 210 030315	-- --	---	EKO 910 030315
EKO 210 030320	EKO 212 030320	EKO 201 030320	EKO 910 030320
EKO 210 030415	-- --	---	EKO 910 030415
EKO 210 030420	EKO 212 030420	EKO 201 030420	EKO 910 030420
EKO 210 030520	EKO 212 030520	EKO 201 030520	EKO 910 030520
EKO 210 040315	-- --	---	EKO 910 040315
EKO 210 040420	EKO 212 040420	EKO 201 040420	EKO 910 040420
EKO 210 040425	-- --	---	EKO 910 040425
EKO 210 040515	-- --	---	EKO 910 040515
EKO 210 040520	EKO 212 040520	EKO 201 040520	EKO 910 040520
EKO 210 040525	-- --	---	EKO 910 040525
EKO 210 040620	EKO 212 040620	EKO 201 040620	EKO 910 040620
EKO 210 040625	-- --	---	EKO 910 040625
EKO 210 040630	EKO 212 040630	EKO 201 040630	EKO 910 040630
EKO 210 040820	EKO 212 040820	EKO 201 040820	EKO 910 040820
EKO 210 050520	EKO 212 050520	EKO 201 050520	EKO 910 050520
EKO 210 050525	-- --	---	EKO 910 050525
EKO 210 050620	EKO 212 050620	EKO 201 050620	EKO 910 050620
EKO 210 050625	-- --	---	EKO 910 050625
EKO 210 050720	EKO 212 050720	EKO 201 050720	EKO 910 050720
EKO 210 050725	-- --	---	EKO 910 050725
EKO 210 050730	EKO 212 050730	EKO 201 050730	EKO 910 050730
EKO 210 050820	EKO 212 050820	EKO 201 050820	EKO 910 050820
EKO 210 060420	EKO 212 060420	EKO 201 060420	EKO 910 060420
EKO 210 060620	EKO 212 060620	EKO 201 060620	EKO 910 060620
EKO 210 060625	-- --	---	EKO 910 060625
EKO 210 060630	EKO 212 060630	EKO 201 060630	EKO 910 060630
EKO 210 060820	EKO 212 060820	EKO 201 060820	EKO 910 060820
EKO 210 060825	-- --	---	EKO 910 060825
EKO 210 060830	EKO 212 060830	EKO 201 060830	EKO 910 060830
EKO 210 061020	EKO 212 061020	EKO 201 061020	EKO 910 061020
EKO 210 061025	-- --	---	EKO 910 061025
EKO 210 061030	EKO 212 061030	EKO 201 061030	EKO 910 061030
EKO 210 061225	-- --	---	EKO 910 061225
EKO 210 061230	EKO 212 061230	EKO 201 061230	EKO 910 061230
EKO 210 080620	EKO 212 080620	---	EKO 910 080620
EKO 210 080630	EKO 212 080630	---	EKO 910 080630
EKO 210 080820	EKO 212 080820	---	EKO 910 080820
EKO 210 080825	-- --	---	EKO 910 080825
EKO 210 080830	EKO 212 080830	---	EKO 910 080830
EKO 210 081025	-- --	---	EKO 910 081025
EKO 210 081030	EKO 212 081030	---	EKO 910 081030
EKO 210 081225	-- --	---	EKO 910 081225
EKO 210 081230	EKO 212 081230	---	EKO 910 081230
---	-- --	---	EKO 910 100630
---	-- --	---	EKO 910 101025
---	-- --	---	EKO 910 101030
---	-- --	---	EKO 910 101225
---	-- --	---	EKO 910 101230
---	-- --	---	EKO 910 121225
---	-- --	---	EKO 910 121230
---	-- --	---	EKO 910 121240

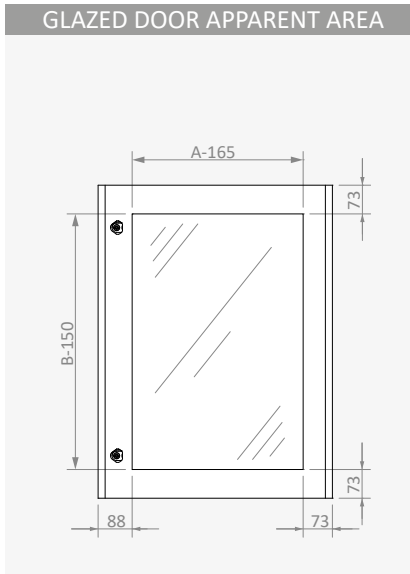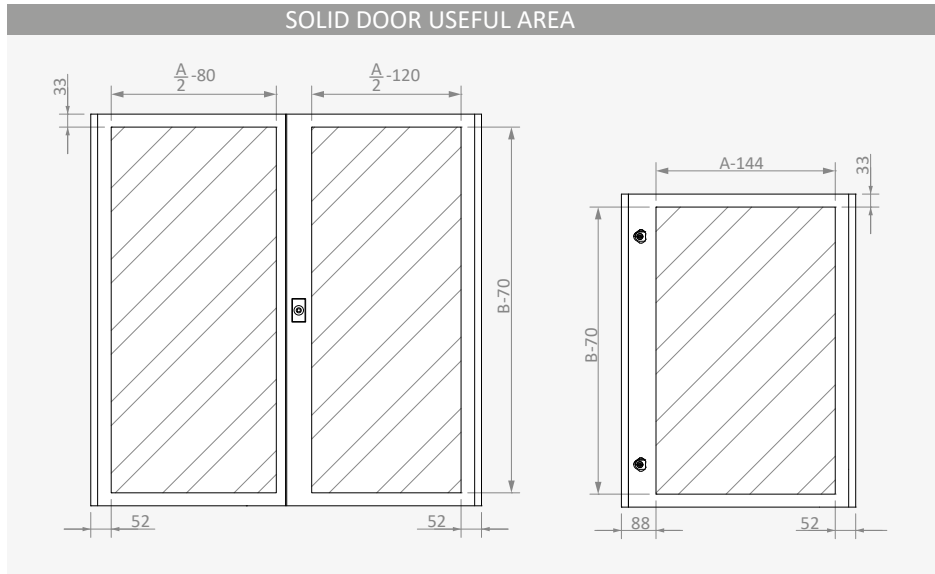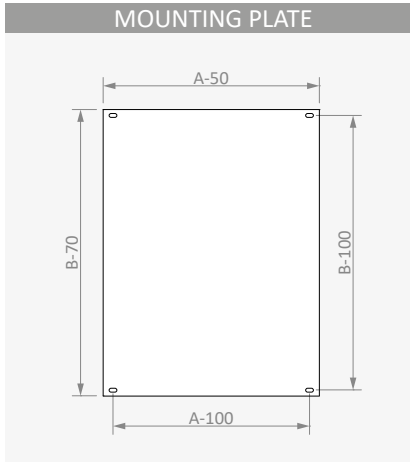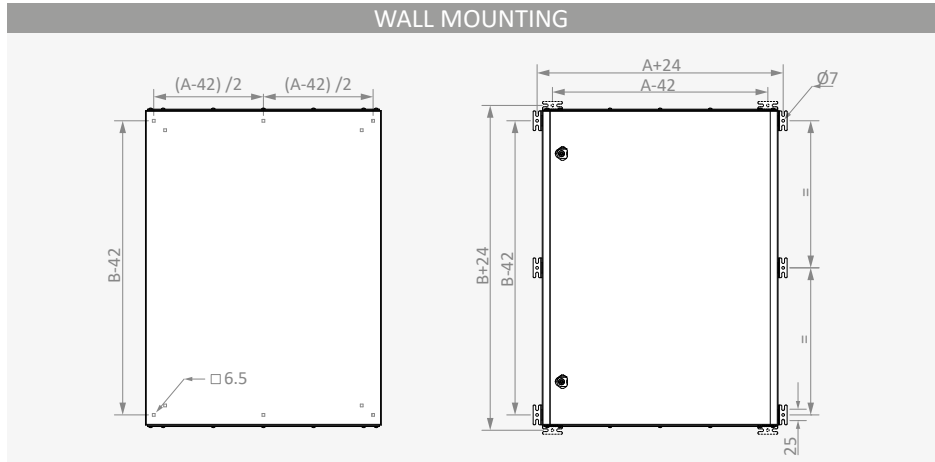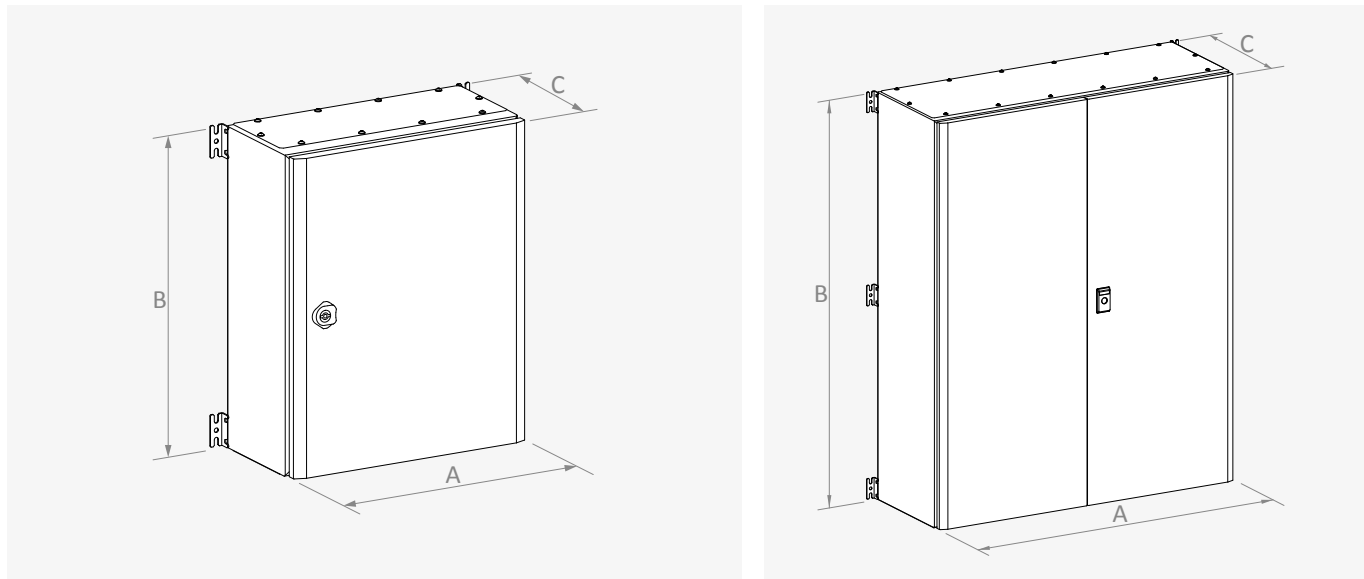

DEPTH DIMENSIONS

Width	Depth	D1	D2	F	Y1	Y2
A	C					
A < 600	150	129	13	59	45	23
	200	179	13	109	80	38
	300	279	13	193	160	38
A ≥ 600	200	176	16	109	80	38
	300	276	16	193	160	38


Width	Height	Depth	Reference	Useful Area			Glazed Door Apparent Area	Gland Plate			Wall Mounting						Mounting Plate		
				Door		Side					With Bracket			Internal					
				↔	↕	↗	↔	↕	#	↔	↗	↔	↕	↔	↕	↔	↕	↔	↕
mm	mm	mm		mm	mm	mm	mm	mm	pcs	mm	mm	mm	mm	mm	mm	mm	mm	mm	
200	300	150	EKO xxx 020315	56	230	101	-	-	2	160	60	224	258	158	324	158	258	150	230
300	300	150	EKO xxx 030315	156	230	101	135	150	2	260	60	324	258	258	324	258	258	250	230
		200	EKO xxx 030320	156	230	151	135	150	2	260	110	324	258	258	324	258	258	250	230
	400	150	EKO xxx 030415	156	330	101	135	250	2	260	60	324	358	258	424	258	358	250	330
		200	EKO xxx 030420	156	330	151	135	250	2	260	110	324	358	258	424	258	358	250	330
	500	200	EKO xxx 030520	156	430	151	135	350	2	260	110	324	458	258	524	258	458	250	430
400	300	150	EKO xxx 040315	256	230	101	235	150	2	360	60	424	258	358	324	358	258	350	230
	400	200	EKO xxx 040420	256	330	151	235	250	2	360	110	424	358	358	424	358	358	350	330
		250	EKO xxx 040425	256	330	201	235	250	2	360	110	424	358	358	424	358	358	350	330
		500	150	EKO xxx 040515	256	430	101	235	350	2	360	60	424	458	358	524	358	458	350
	200		EKO xxx 040520	256	430	151	235	350	2	360	110	424	458	358	524	358	458	350	430
	250		EKO xxx 040525	256	430	201	235	350	2	360	110	424	458	358	524	358	458	350	430
	600	200	EKO xxx 040620	256	530	151	235	450	2	360	110	424	558	358	624	358	558	350	530
		250	EKO xxx 040625	256	530	201	235	450	2	360	110	424	558	358	624	358	558	350	530
		300	EKO xxx 040630	256	530	251	235	450	2	360	194	424	558	358	624	358	558	350	530
	800	200	EKO xxx 040820	256	730	177	235	650	2	360	110	424	758	358	824	358	758	350	730
	500	500	200	EKO xxx 050520	356	430	151	335	350	2	460	110	524	458	458	524	458	458	450
250			EKO xxx 050525	356	430	201	335	350	2	460	110	524	458	458	524	458	458	450	430
600		200	EKO xxx 050620	356	530	151	335	450	2	460	110	524	558	458	624	458	558	450	530
		250	EKO xxx 050625	356	530	201	335	450	2	460	110	524	558	458	624	458	558	450	530
700		200	EKO xxx 050720	356	630	151	335	550	2	460	110	524	658	458	724	458	658	450	630
		250	EKO xxx 050725	356	630	201	335	550	2	460	110	524	658	458	724	458	658	450	630
		300	EKO xxx 050730	356	630	251	335	550	2	460	194	524	658	458	724	458	658	450	630
800		200	EKO xxx 050820	356	730	177	335	650	2	460	110	524	758	458	824	458	758	450	730
600	400	200	EKO xxx 060420	456	330	149	435	250	2	560	110	624	358	558	424	558	358	550	330
	600	200	EKO xxx 060620	456	530	149	435	450	2	560	110	624	558	558	624	558	558	550	530
		250	EKO xxx 060625	456	530	149	435	450	2	560	110	624	558	558	624	558	558	550	530
		300	EKO xxx 060630	456	530	249	435	450	2	560	194	624	558	558	624	558	558	550	530
	800	200	EKO xxx 060820	456	730	149	435	650	2	560	110	624	758	558	824	558	758	550	730
		250	EKO xxx 060825	456	730	199	435	650	2	560	110	624	758	558	824	558	758	550	730
		300	EKO xxx 060830	456	730	249	435	650	2	560	194	624	758	558	824	558	758	550	730
	1000	200	EKO xxx 061020	456	930	149	435	850	2	560	110	624	958	558	1024	558	958	550	930
		250	EKO xxx 061025	456	930	199	435	850	2	560	110	624	958	558	1024	558	958	550	930
		300	EKO xxx 061030	456	930	249	435	850	2	560	194	624	958	558	1024	558	958	550	930
	1200	250	EKO xxx 061225	456	1130	199	435	1050	2	560	194	624	1158	558	1224	558	1158	550	1130
		300	EKO xxx 061230	456	1130	249	435	1050	2	560	194	624	1158	558	1224	558	1158	550	1130
800	600	200	EKO xxx 080620	656	530	149	635	450	2	760	110	824	558	758	624	758	558	750	530
		300	EKO xxx 080630	656	530	249	-	-	2	760	194	824	558	758	624	758	558	750	530
	800	200	EKO xxx 080820	656	730	149	-	-	2	760	110	824	758	758	824	758	758	750	730
		250	EKO xxx 080825	656	730	199	-	-	2	760	194	824	758	758	824	758	758	750	730
		300	EKO xxx 080830	656	730	249	-	-	2	760	194	824	758	758	824	758	758	750	730
	1000	250	EKO xxx 081025	656	930	199	635	850	2	760	194	824	958	758	1024	758	958	750	930
		300	EKO xxx 081030	656	930	249	635	850	2	760	194	824	958	758	1024	758	958	750	930
	1200	250	EKO xxx 081225	656	1130	199	635	1050	2	760	194	824	1158	758	1224	758	1158	750	1130
		300	EKO xxx 081230	656	1130	249	635	1050	2	760	194	824	1158	758	1224	758	1158	750	1130
1000	600	300	EKO xxx 106030	420 + 380	530	249	-	-	2	960	194	1024	558	958	624	479 + 479	558	950	530
	1000	250	EKO xxx 101025	419 + 380	929	199	-	-	2	960	194	1024	958	958	1024	479 + 479	958	950	930
		300	EKO xxx 101030	420 + 380	930	249	-	-	2	960	194	1024	958	958	1024	479 + 479	958	950	930
		250	EKO xxx 101225	420 + 380	1130	199	-	-	2	1160	194	1024	1158	958	1224	479 + 479	1158	950	1130
		300	EKO xxx 101230	419 + 380	1130	199	-	-	2	960	194	1024	1158	958	1224	479 + 479	1158	950	1130
1200	1200	250	EKO xxx 121225	420 + 380	1130	249	-	-	2	960	194	1024	1158	1158	1224	579 + 579	1158	950	1130
		300	EKO xxx 121230	520 + 480	1130	249	-	-	2	1160	194	1224	1158	1158	1224	579 + 579	1158	1150	1130
		400	EKO xxx 121240	520 + 480	1130	349	-	-	2	1160	194	1224	1158	1158	1224	579 + 579	1158	1150	1130

SOLID DOOR

Reference	Width	Height	Useful Area		Door	Lock Type	Lock	Hinge	Door Thickness	Weight
	A	B	W1	H1						
	mm	mm								
EKO KP 0203	200	300	56	230	1	C	1	2	1.2	0.7
EKO KP 0303	300	300	156	230	1	C	1	2	1.2	1.1
EKO KP 0304	300	400	156	330	1	C	1	2	1.2	1.5
EKO KP 0305	300	500	156	430	1	C	1	2	1.2	1.8
EKO KP 0403	400	300	256	230	1	C	1	2	1.2	1.4
EKO KP 0404	400	400	256	330	1	C	1	2	1.2	1.9
EKO KP 0405	400	500	256	430	1	C	1	2	1.2	2.3
EKO KP 0406	400	600	256	530	1	C	2	2	1.2	2.7
EKO KP 0408	400	800	256	730	1	C	2	3	1.2	3.7
EKO KP 0505	500	500	356	430	1	C	1	2	1.2	2.8
EKO KP 0506	500	600	356	530	1	C	2	2	1.2	3.5
EKO KP 0507	500	700	356	630	1	C	2	3	1.2	3.9
EKO KP 0508	500	800	356	730	1	C	2	3	1.2	4.6
EKO KP 0604	600	400	456	330	1	C	1	2	1.2	2.9
EKO KP 0606	600	600	456	530	1	C	2	2	1.2	3.8
EKO KP 0608	600	800	456	730	1	C	2	3	1.2	5.2
EKO KP 0610	600	1000	456	930	1	C	2	3	1.2	6.4
EKO KP 0612	600	1200	456	1130	1	C	2	4	1.2	7.5
EKO KP 0806	800	600	656	530	1	C	2	3	1.2	6.5
EKO KP 0806	800	600	656	530	2	C	2	3+3	1.2	6,7
EKO KP 0808	800	800	656	730	1	C	2	3	1.2	8,5
EKO KP 0810	800	1000	656	930	1	C	2	4	1.5	10.5
EKO KP 0812	800	1200	656	1130	1	C	2	4	1.5	12.5
EKO KP 1060	1000	600	420 + 380	530	2	C	1	2+2	1.5	7.9
EKO KP 1010	1000	1000	420 + 380	930	2	I	1	4+4	1.5	13.9
EKO KP 1012	1000	1200	420 + 380	1130	2	I	1	4+4	1.5	16.9
EKO KP 1212	1200	1200	520 + 480	1130	2	I	1	4+4	1.5	17

Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Double door gutter Conta	

* C: Quarter Turn I: Escutcheon Rod-latch

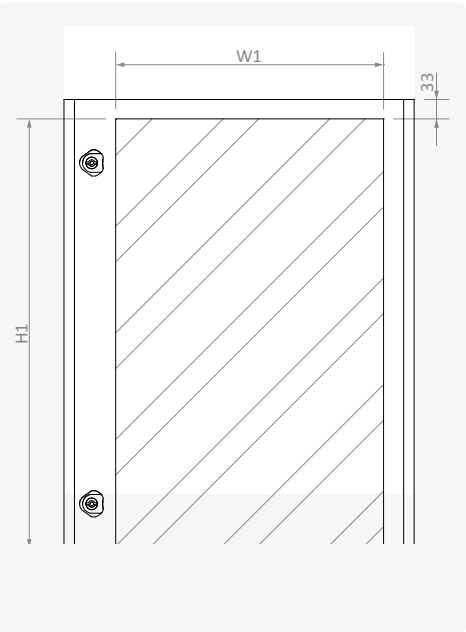


GLAZED DOOR

Reference	Width	Height	Apparent Area		Lock Type	Lock	Hinge	Door Thickness	Weight
	A	B	W6	H6					
	mm	mm	mm	mm					
EKO KPX 0303	300	300	135	150	C	1	2	1.2	1.10
EKO KPX 0304	300	400	135	250	C	1	2	1.2	1.60
EKO KPX 0305	300	500	135	350	C	1	2	1.2	2.00
EKO KPX 0403	400	300	235	150	C	1	2	1.2	1.60
EKO KPX 0404	400	400	235	250	C	1	2	1.2	2.10
EKO KPX 0405	400	500	235	350	C	1	2	1.2	2.50
EKO KPX 0406	400	600	235	450	C	2	2	1.2	3.00
EKO KPX 0408	400	800	235	650	C	2	3	1.2	4.10
EKO KPX 0505	500	500	335	350	C	1	2	1.2	3.00
EKO KPX 0506	500	600	335	450	C	2	2	1.2	3.80
EKO KPX 0507	500	700	335	550	C	2	3	1.2	4.30
EKO KPX 0508	500	800	335	650	C	2	3	1.2	5.10
EKO KPX 0604	600	400	435	250	C	1	2	1.2	3.60
EKO KPX 0606	600	600	435	450	C	2	2	1.2	4.90
EKO KPX 0608	600	800	435	650	C	2	3	1.2	9.50
EKO KPX 0610	600	1000	435	850	C	2	3	1.2	7.80
EKO KPX 0612	600	1200	435	1050	C	2	4	1.2	9.20
EKO KPX 0806	800	600	635	450	C	2	3	1.5	6.30
EKO KPX 0810	800	1000	635	850	C	2	4	1.5	10.00
EKO KPX 0812	800	1200	635	1050	C	2	4	1.5	11.90

Characteristics	
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass
Surface Finishing	RAL7035w powder coating


Supply Includes	
Lock	
* C: Quarter Turn	

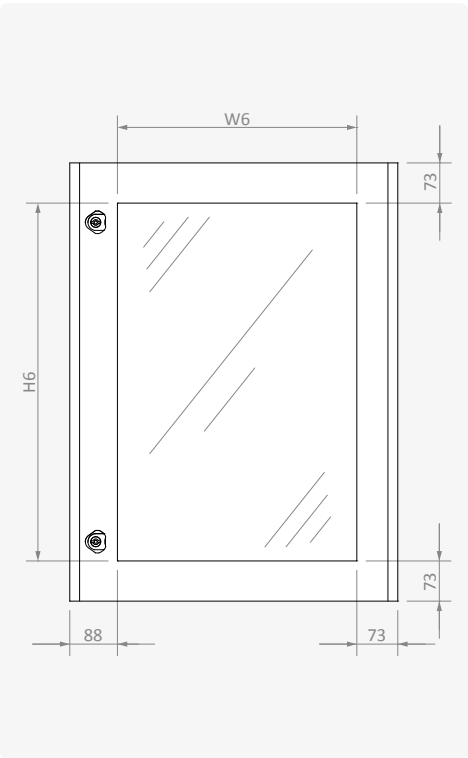

MOUNTING PLATE

Reference	Width		Height			External Dimensions			Mounting Dimensions			Thickness	Weight
	A	B	mm	mm	mm	X1	Y1	Z	X2	Y2	D		
	mm	mm				mm	mm	mm	mm	mm	mm	mm	kg
ETS TS 0203	200	300				150	230	12	Center	200	M6	1.5	0.6
ETS TS 0303	300	300				250	230	12	Center	200	M6	1.5	1.0
ETS TS 0304	300	400				250	330	12	Center	300	M6	1.5	1.4
ETS TS 0305	300	500				250	430	12	Center	400	M6	1.5	1.8
ETS TS 0403	400	300				350	230	12	300	200	M6	1.5	1.3
ETS TS 0404	400	400				350	330	12	300	300	M6	1.5	1.9
ETS TS 0405	400	500				350	430	12	300	400	M6	1.5	2.5
ETS TS 0406	400	600				350	530	12	300	500	M6	1.5	3.1
ETS TS 0408	400	800				350	730	12	300	700	M6	1.5	6.1
ETS TS 0505	500	500				450	430	12	400	400	M6	1.5	3.3
ETS TS 0506	500	600				450	530	12	400	500	M6	1.5	4.0
ETS TS 0507	500	700				450	630	12	400	600	M6	1.5	4.8
ETS TS 0508	500	800				450	730	12	400	700	M6	1.5	6.1
ETS TS 0604	600	400				550	330	15	500	300	M8	1.5	3.2
ETS TS 0606	600	600				550	530	15	500	500	M8	1.5	5.0
ETS TS 0608	600	800				550	730	15	500	700	M8	1.5	6.9
ETS TS 0610	600	1000				550	930	15	500	900	M8	1.5	8.7
ETS TS 0612	600	1200				550	1130	15	500	1100	M8	1.5	10.2
ETS TS 0806	800	600				750	530	15	700	500	M8	1.5	6.8
ETS TS 0808	800	800				750	730	15	700	700	M8	1.5	8.9
ETS TS 0810	800	1000				750	930	15	700	900	M8	2.0	11.7
ETS TS 0812	800	1200				750	1130	15	700	1100	M8	2.0	14.2
ETS TS 1010	1000	600				950	530	15	900	500	M8	2.0	14.2
ETS TS 1010	1000	1000				950	930	15	900	900	M8	2.0	14.8
ETS TS 1012	1000	1200				950	1130	15	900	1100	M8	2.0	17.6
ETS TS 1212	1200	1200				1150	1130	15	1100	1100	M8	2.0	18.0


Characteristics	
■ Material	DIN EN 10346 DX51D+Z galvanized
■ Thickness	1.5 - 2 mm

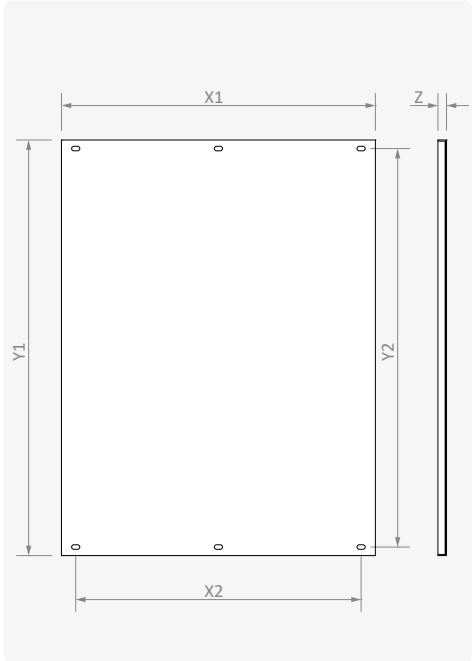

HINGED INNER DOOR SET

Reference	Width	Height	External Dimensions		Useful Area		Lock	Hinge	Weight
	A	B	X1	Y1	W1	H1			
	mm	mm	mm	mm	mm	mm	pcs	pcs	kg
EKO IKT 0303	300	300	242	245	160	220	1	2	1.1
EKO IKT 0304	300	400	242	345	160	320	1	2	1.5
EKO IKT 0305	300	500	242	445	160	420	1	2	1.8
EKO IKT 0403	400	300	342	245	260	220	1	2	1.4
EKO IKT 0404	400	400	342	345	260	320	1	2	1.9
EKO IKT 0405	400	500	342	445	260	420	1	2	2.3
EKO IKT 0406	400	600	342	545	260	520	1	2	2.7
EKO IKT 0408	400	800	342	745	260	720	2	3	3.7
EKO IKT 0505	500	500	442	445	360	420	1	2	2.8
EKO IKT 0506	500	600	442	545	360	520	1	2	3.5
EKO IKT 0507	500	700	442	645	360	620	2	2	3.9
EKO IKT 0508	500	800	442	745	360	720	2	3	3.8
EKO IKT 0604	600	400	542	345	460	320	1	2	2.9
EKO IKT 0606	600	600	542	545	460	520	1	2	3.8
EKO IKT 0608	600	800	542	745	460	720	2	3	5.2
EKO IKT 0610	600	1000	542	945	460	920	2	3	6.4
EKO IKT 0612	600	1200	542	1145	460	1120	2	3	7.5
EKO IKT 0806	800	600	742	545	646	520	2	3	5.2
EKO IKT 0808	800	800	742	745	646	720	2	3	6,5
EKO IKT 0810	800	1000	742	945	646	920	2	3	7.1
EKO IKT 0812	800	1200	742	1145	646	1120	2	3	8.1

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Inner door / Inner door profile	
■ Surface Finishing	RAL7035w powder coating	■ Hinges and lock	
■ Thickness	1.2 mm	■ Inner door fasteners set	

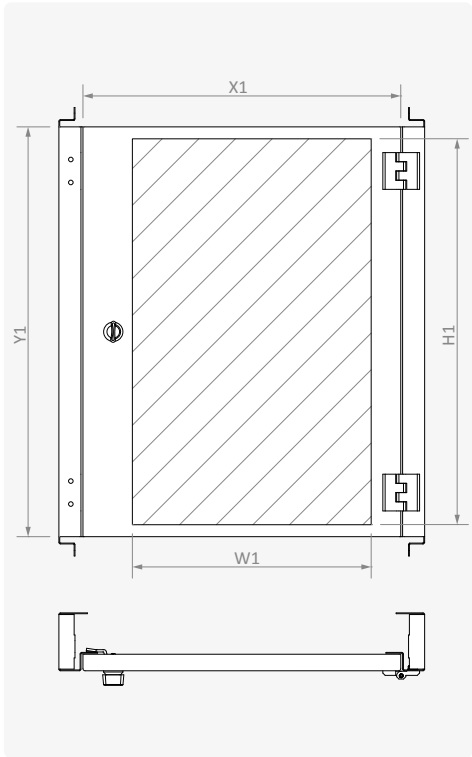


STANDARD COVER PLATE SET

Reference	Width		Cover Plate Quantity	Capacity	Module Cut-Out		Solid Cover Plate		
	A	B			Height	Height	Height	Height	Height
	mm	mm			120	160	100	120	140
EKO PT 0303	300	300	2	12		1	1		
EKO PT 0304	300	400	3	24	2			1	
EKO PT 0305	300	500	4	36	3		1		
EKO PT 0403	400	300	2	18		1	1		
EKO PT 0404	400	400	3	36	2			1	
EKO PT 0405	400	500	4	36	2		1	1	
EKO PT 0406	400	600	4	54	1	2		1	
EKO PT 0408	400	800	6	72	2	2	1	1	
EKO PT 0505	500	500	3	48		2			1
EKO PT 0506	500	600	4	72	1	2		1	
EKO PT 0507	500	700	5	72	1	2	1	1	
EKO PT 0508	500	800	6	96	2	2	1	1	
EKO PT 0604	600	400	3	29	2			1	
EKO PT 0606	600	600	4	87	1	2		1	
EKO PT 0608	600	800	6	116	2	2	2		
EKO PT 0610	600	1000	7	145	1	4	2		
EKO PT 0612	600	1200	8	145		5	1	1	1

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating

Supply Includes	
Cover plates / Cover plate profiles	
Cover plate profile fasteners	




COVER PLATES

Reference	Width	External Dimensions		Useful Area	Module Cut-Out		Weight
		X1	Y1		X3	Capacity	
		mm	mm		mm	Module	
ETS PL 3010	300	268	98	225	-	-	0.3
ETS PL 3012	300	268	118	225	-	-	0.3
ETS PL 3014	300	268	138	225	-	-	0.3
ETS PL 3016	300	268	158	225	-	-	0.4
ETS PL 4010	400	368	98	325	-	-	0.3
ETS PL 4012	400	368	118	325	-	-	0.4
ETS PL 4014	400	368	138	325	-	-	0.4
ETS PL 4016	400	368	158	325	-	-	0.5
ETS PL 5010	500	468	98	425	-	-	0.4
ETS PL 5012	500	468	118	425	-	-	0.4
ETS PL 5014	500	468	138	425	-	-	0.5
ETS PL 5016	500	468	158	425	-	-	0.7
ETS PL 6010	600	568	98	525	-	-	0.5
ETS PL 6012	600	568	118	525	-	-	0.6
ETS PL 6014	600	568	138	525	-	-	0.6
ETS PL 6016	600	568	158	525	-	-	0.8
ETS PL 3012W	300	268	118	-	215	12	0.2
ETS PL 3014W	300	268	138	-	215	12	0.2
ETS PL 3016W	300	268	158	-	215	12	0.3
ETS PL 4012W	400	368	118	-	320	18	0.3
ETS PL 4014W	400	368	138	-	320	18	0.3
ETS PL 4016W	400	368	158	-	320	18	0.4
ETS PL 5012W	500	468	118	-	425	24	0.4
ETS PL 5014W	500	468	138	-	425	24	0.4
ETS PL 5016W	500	468	158	-	425	24	0.5
ETS PL 6012W	600	568	118	-	515	29	0.4
ETS PL 6014W	600	568	138	-	515	29	0.4
ETS PL 6016W	600	568	158	-	515	29	0.6


Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	0.9 mm

Supply Includes	
Cover plate profiles fasteners and plastic nuts	
Handles	

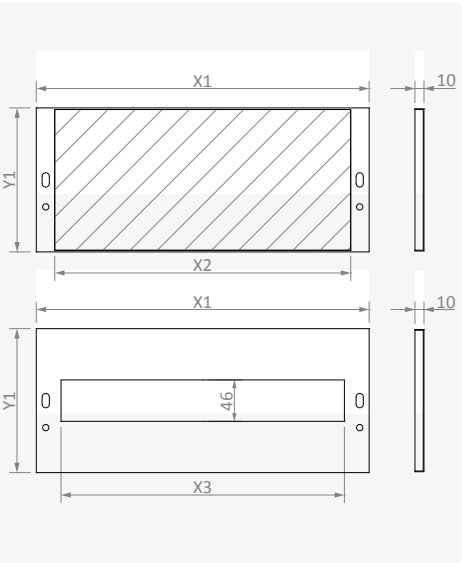



COVER PLATE PROFILE						
Reference	Height	External Dimensions	Packet	Weight	Characteristics	
	B	Y			Material	DIN EN 10130 DC01 CCRS
	mm	mm	pcs/package	kg	Surface Finishing	RAL7035w powder coating
EKO PR 030	300	288	2	0.7	Thickness	1.2 mm
EKO PR 040	400	388	2	1.0		
EKO PR 050	500	488	2	1.3		
EKO PR 060	600	588	2	1.5		
EKO PR 070	700	688	2	1.8		
EKO PR 080	800	788	2	2.1		
EKO PR 100	1000	988	2	2.6		
EKO PR 120	1200	1188	2	3.0		

RAIN CANOPY							
Reference	Width	Depth	External Dimensions		Mounting Dimensions		Weight
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
ETS HS 0315	300	150	325	175	278	45	1.1
ETS HS 0320	300	200	325	225	278	80	1.6
ETS HS 0415	400	150	425	175	378	45	1.6
ETS HS 0420	400	200	425	225	378	80	2.0
ETS HS 0425	400	250	425	275	378	80	1.6
ETS HS 0430	400	300	425	325	378	160	2.6
ETS HS 0520	500	200	525	225	478	80	2.4
ETS HS 0525	500	250	525	275	478	80	1.9
ETS HS 0530	500	300	525	325	478	160	3.1
ETS HS 0620	600	200	625	225	578	80	2.7
ETS HS 0625	600	250	625	275	578	80	2.2
ETS HS 0630	600	300	625	325	578	160	3.5
ETS HS 0820	800	200	825	225	778	80	3.6
ETS HS 0825	800	250	825	275	778	80	4.1
ETS HS 0830	800	300	825	325	778	160	4.7
ETS HS 1025	1000	250	1025	275	978	80	4.9
ETS HS 1030	1000	300	1025	325	978	160	5.8
ETS HS 1225	1200	250	1225	275	1178	80	5.9
ETS HS 1230	1200	300	1225	325	1178	160	6.5
ETS HS 1240	1200	400	1225	425	1178	260	7,2

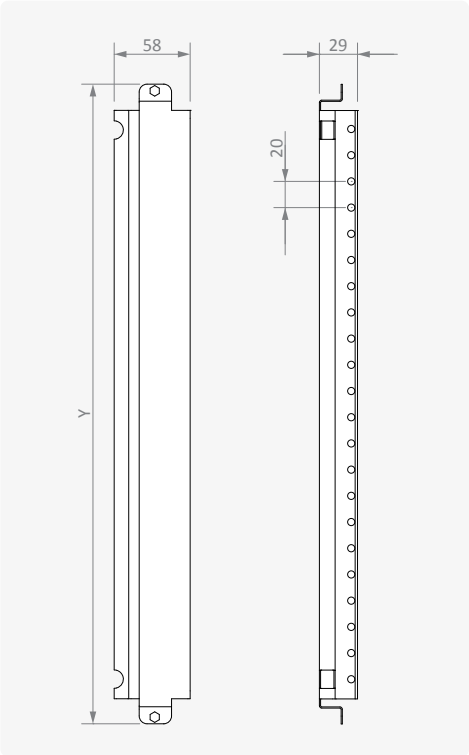

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.2 mm

Supply Includes
Mounting fasteners

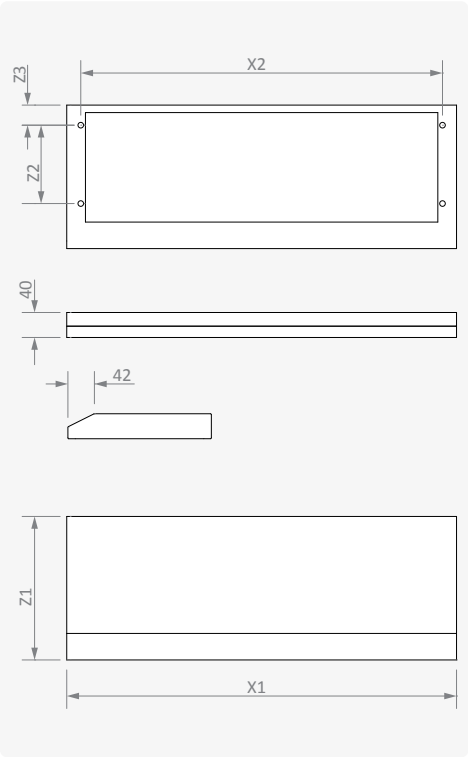
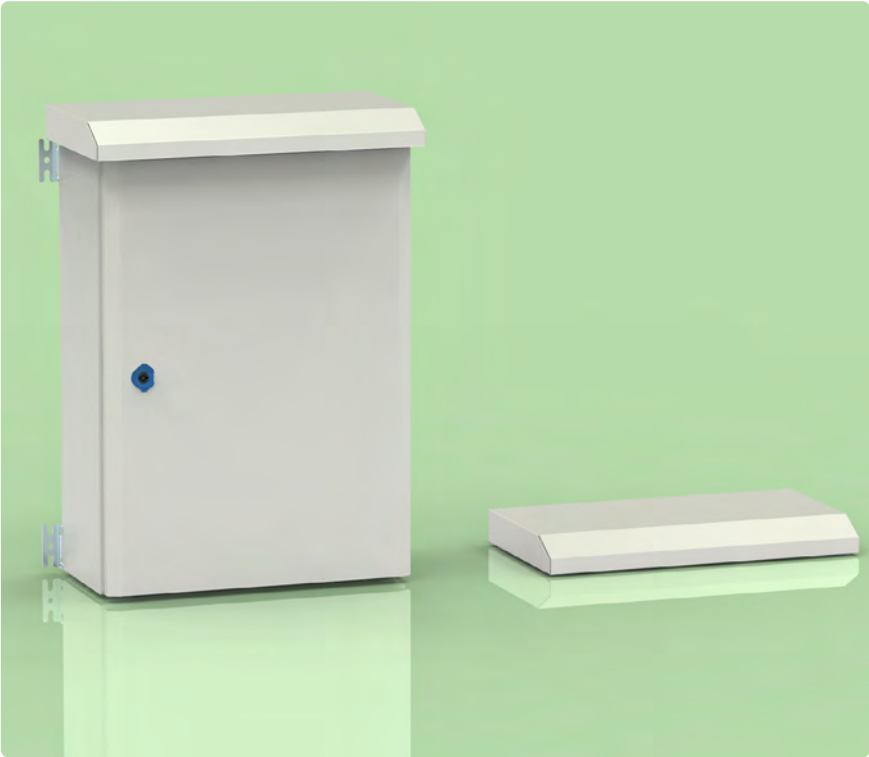


SUPPORT BASE

Width A mm	Depth C mm	Reference	Reference	External Dimensions		Mounting Dimensions				Weight kg
				X1 mm	Z1 mm	X2 mm	Z2 mm	X3 mm	Z3 mm	
300	150	PNETSATG03	PNETSATD15	478	270	448	218	278	45	3,2
300	200	PNETSATG03	PNETSATD20	478	320	448	268	278	80	3.4
400	150	PNETSATG04	PNETSATD15	578	270	548	218	378	45	3,2
400	200	PNETSATG04	PNETSATD20	578	320	548	268	378	80	3.5
400	250	PNETSATG04	PNETSATD20	578	320	548	268	378	80	3.5
400	300	PNETSATG04	PNETSATD30	578	420	548	368	378	160	3.8
500	200	PNETSATG05	PNETSATD20	678	320	648	268	478	80	3.8
500	250	PNETSATG05	PNETSATD20	678	320	648	268	478	80	3.8
500	300	PNETSATG05	PNETSATD30	678	420	648	368	478	160	4.0
600	200	PNETSATG06	PNETSATD20	778	320	748	268	578	80	4.0
600	250	PNETSATG06	PNETSATD20	778	320	748	168	578	80	4.0
600	300	PNETSATG06	PNETSATD30	778	420	748	368	578	160	4.2
800	200	PNETSATG08	PNETSATD20	978	320	948	268	778	80	4.3
800	250	PNETSATG08	PNETSATD20	978	320	948	268	778	80	4.3
800	300	PNETSATG08	PNETSATD30	978	420	948	368	778	160	4.6
1000	250	PNETSATG10	PNETSATD20	1178	320	1148	268	978	80	4.6
1000	300	PNETSATG10	PNETSATD30	1178	420	1148	368	978	160	4.9
1200	250	PNETSATG12	PNETSATD20	1378	320	1348	268	1178	80	4.9
1200	300	PNETSATG12	PNETSATD30	1378	420	1348	368	1178	160	5.3
1200	400	PNETSATG12	PNETSATD40	1378	520	1348	468	1178	160	5.4

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm

Supply Includes	
■ Mounting fasteners	

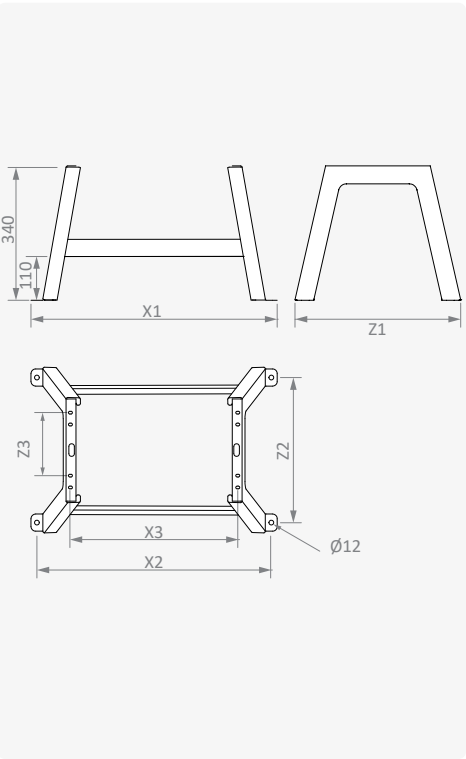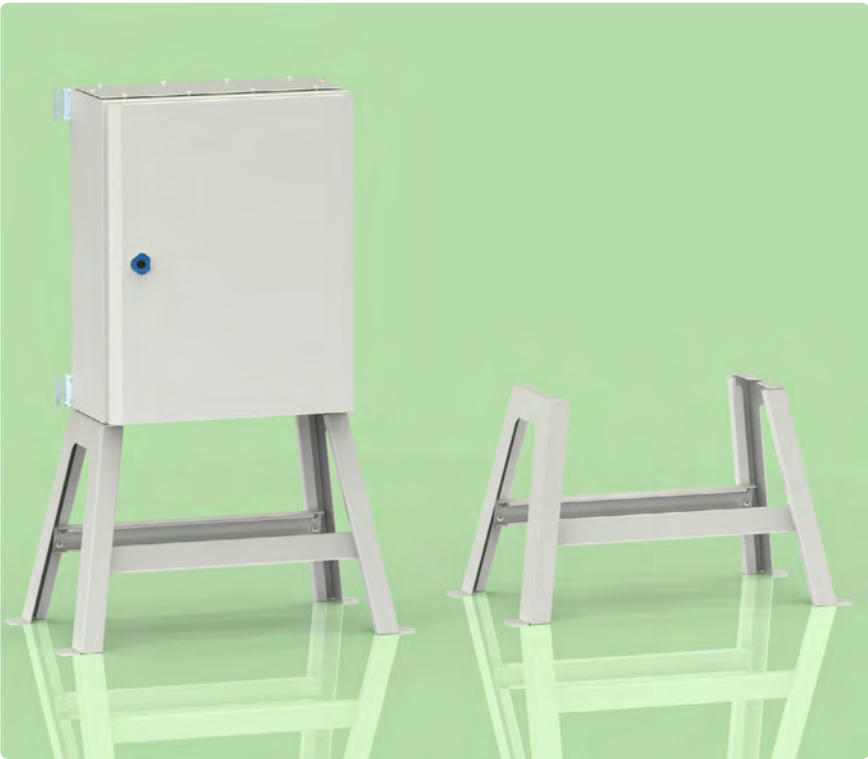


CABLE GLAND PLATE

Reference	Width A mm	Depth C mm	External Dimensions		Useful Area		Weight kg
			X1 mm	Z1 mm	X2 mm	Z2 mm	
ETS GP 2015	200	150	190	96	160	60	0.3
ETS GP 3015	300	150	290	96	260	60	0.4
ETS GP 3020	300	200	290	146	260	110	0.6
ETS GP 4015	400	150	390	96	360	59	0.5
ETS GP 4020	400	200	390	146	360	110	0.7
ETS GP 4030	400	300	390	246	360	193	1.2
ETS GP 5020	500	200	490	146	460	110	0.9
ETS GP 5030	500	300	490	246	460	193	1.5
ETS GP 6020	600	200	590	146	560	110	1.1
ETS GP 6030	600	300	590	246	560	193	1.8
ETS GP 8020	800	200	790	146	760	110	1.4
ETS GP 8030	800	300	790	246	760	193	2.4
ETS GP 1030	1000	300	990	246	960	193	3.0
ETS GP 1230	1200	300	1190	246	1160	193	3.8

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.5 mm

Supply Includes	
■ One piece PE Conta	
■ Mounting fasteners	

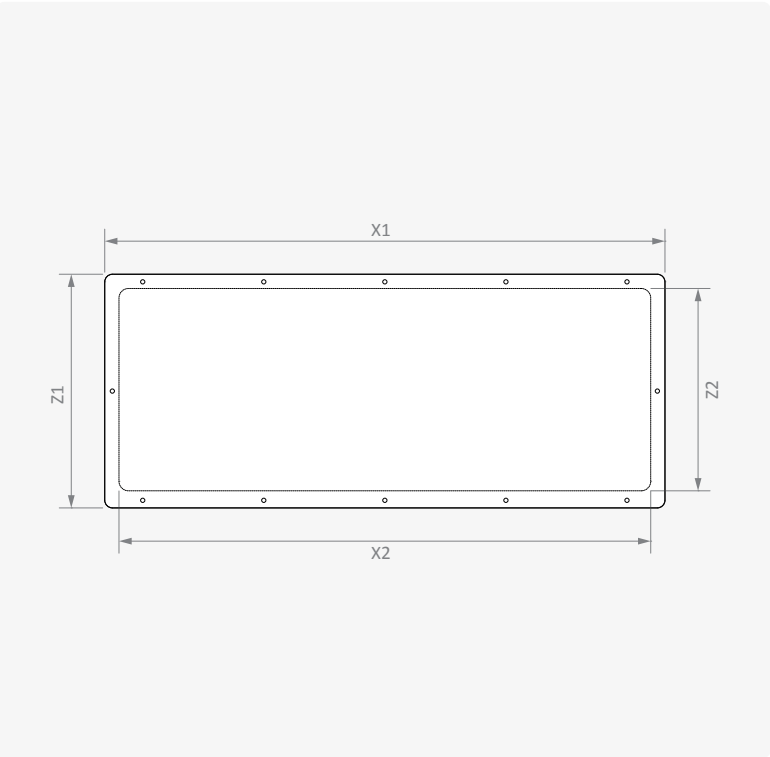


VERTICAL MOUNTING PROFILE

Reference	Height	Length	Connection		Packet	Weight
	B mm	Y1 mm	Y2 mm	n ad	ad packet	kg packet
EKO DP 030	300	292	278	13	2	0.4
EKO DP 040	400	392	378	18	2	0.5
EKO DP 050	500	492	478	23	2	0.7
EKO DP 060	600	592	578	28	2	0.8
EKO DP 070	700	692	678	33	2	0.9
EKO DP 080	800	792	778	38	2	1.1
EKO DP 100	1000	992	978	48	2	1.4
EKO DP 120	1200	1192	1178	55	2	1.6

Characteristics	
Material	DIN EN 10327 DX51D+Z Galvanized
Thickness	2 mm


Supply Includes
Mounting fasteners

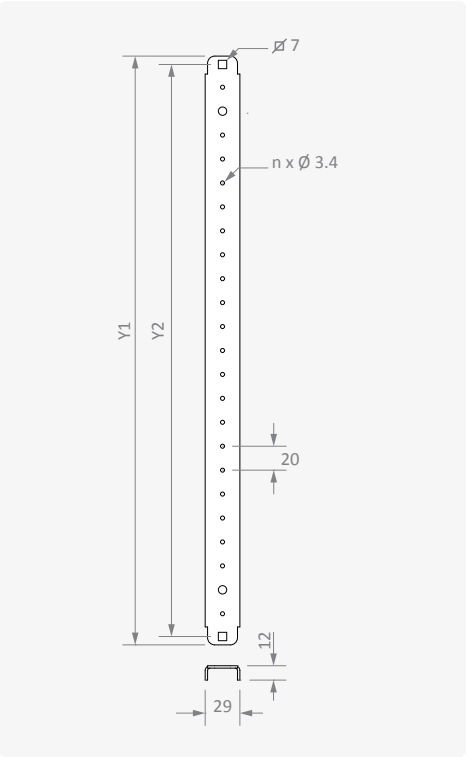

MOUNTING PROFILE INSIDE DOOR

Reference	Height	Length	Weight
	B mm	Y1 mm	kg
AS KU Y00400	300	220	1.1
AS KU Y00500	400	320	1.2
AS KU Y00600	500	420	0.3
AS KU DRM100	600	520	0.4
AS KU Y00800	700	620	0.4
AS KU D00900	800	720	0.5
AS KU DRM120	1000	920	0.6
AS KU DRM150	1200	1120	0.8

Characteristics	
Material	20x20 square profile galvanized
Thickness	1.2 mm

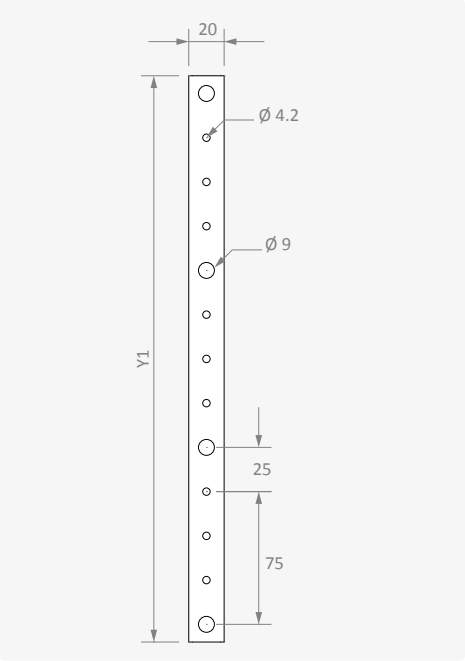


DOOR INSIDE MOUNTING PROFILE

Reference	Width	Lenght	Connection		Weight
	C mm	Z1 mm	Z2 mm	n pcs	kg
EKO IKP 040	400	293	277	10	0.2
EKO IKP 050	500	393	377	14	0.2
EKO IKP 060	600	493	477	18	0.3
EKO IKP 080	800	693	677	26	0.4

Characteristics	
Material	DIN EN 10327 DX51D+Z Galvanized
Thickness	2 mm


Supply Includes
Mounting fasteners

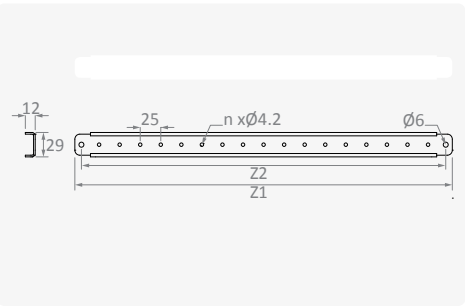

STANDOFF

Reference	External Dimensions	Width Across Flats	Mounting Dimensions	Packet	Weight
	H mm	L mm			
HD BM 00000196	25	13	M6 / M6	20	0.5
HD BM 00000200	50				1.1
HD BM 00000240	75				1.6
HD BM 00000210	125				2.3
HD BM 00000220	50	17	M8 / M8	20	1.8
HD BM 00000230	125				4.7


Characteristics	
Material	Hexagonal free-cutting steel
Surface Finishing	Zinc coated; Cr ⁺³ passivation
Connection	male/female

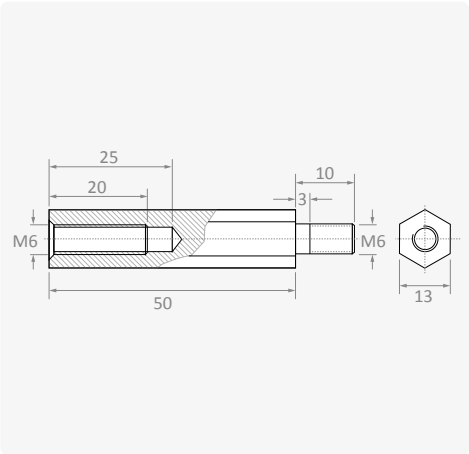

DIN RAILS


Reference	Width mm	Height mm	Hole Yes/No	Length m	Weight kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	Zinc coated Cr ⁺³ passivation
Standards	DIN EN 60715

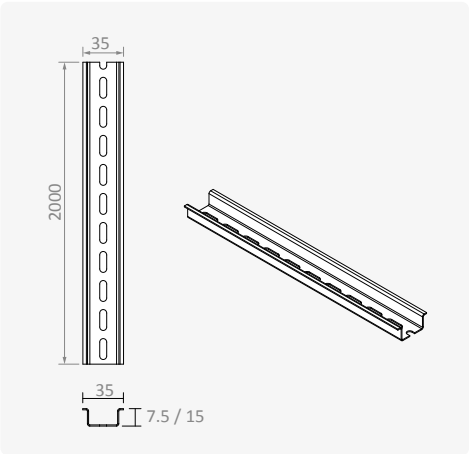



HEIGHT ADJUSTABLE BRACKET FOR MOUNTING PLATE

Reference	Connection	Packet pcs/packet	Weight kg/packet	Characteristics		Supply Includes
				Material	DIN EN 10327 DX51D+Z Galvanized	Mounting fasteners
EKO YB 010L	Sol	2	0.01	Thickness	2 mm	
EKO YB 010R	Sağ	2	0.01			

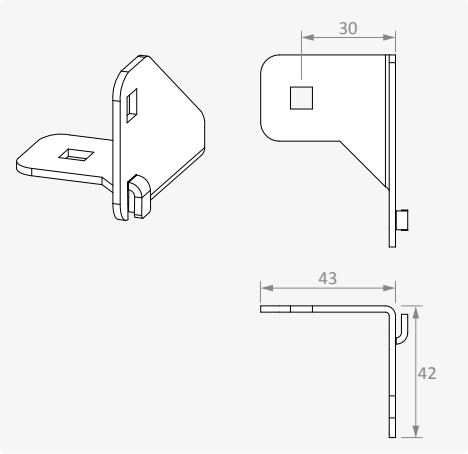


WALL BRACKETS

Reference	Packet pcs/packet	Weight kg/packet	Characteristics		Supply Includes
			Material	DIN EN 10130 DC01 CCRS	Wall mounting screws
AK KL 0010	4	0.16	Surface Finishing	Zinc coated Cr ⁺³ passivation	
AK KL 0011	6	0.25	Thickness	2 mm	

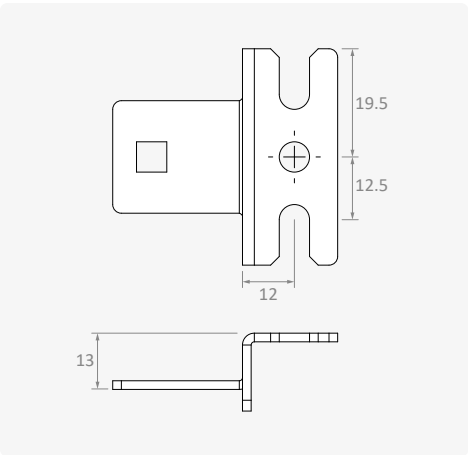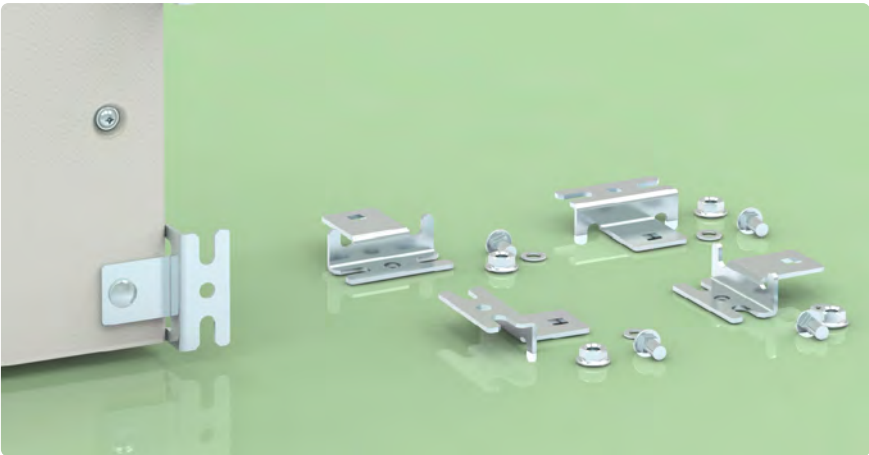


POLE FITTING SET

Reference	Width A mm	Paket pcs set	Weight kg set	Characteristics		Supply Includes
				Material	Stainless Steel 304L (EN 10088 1.4307)	Mounting fasteners
HDS DBS 030	300	2	0.9	Thickness	1.5 - 2 mm	
HDS DBS 040	400	2	1.3			
HDS DBS 050	500	2	1.6			
HDS DBS 060	600	2	1.9			
HDS DBS 060-3	600	3	2.4			
HDS DBS 080	800	3	2.6			

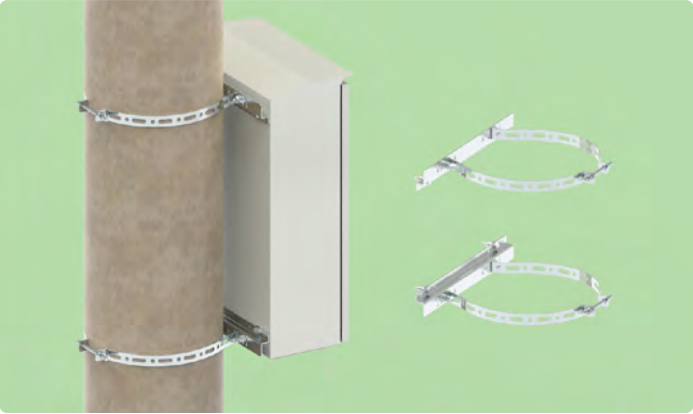


PLASTIC COVER PLATE

Reference	Width	Packet	Weight	Characteristics	
	Module	pcs/packet	kg/packet		
SI OP 00000011	4	50	0.35	■ Material	ABS
					Separable 4 pieces



EARTHING CABLE

Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm		pcs/packet	kg/packet
KBOZ 06 01908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.2
KB TP 16092200	Nickel Plated, Braided Copper Conductor	16	200	M8-M8	10	0.3

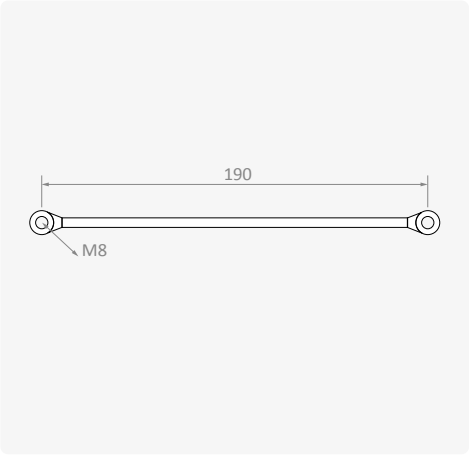

DOOR STAY

Reference	Set	Weight
	pcs/set	kg/set
EKO KD 010	1	0.2
Characteristics		
■ Material	DIN EN 10327 DX51D+Z galvanized	
■ Thickness	2 mm	
Supply Includes		
■ Mounting fasteners		



LOCK AND KEYS

Reference	Lock Type *	Enclosures Type **	Material		Description	Key Code ***
			Casing	Cam	Key Type	
KIATKY2535796T1	C	1 Doors	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100
KIAT KI0301519R	I	2 Doors	Polyamide Cover + Zamak Mechanizm	Zinc coated steel	5 mm Double-bit	KIAN 0100




* C: Quarter Turn; I: Escutcheon
** You can see lock quantities of single door and double door enclosures on table at "Overview Page".
*** Keys should be ordered separately.

SPECIAL LOCKS AND KEYS

Reference	Lock Type *	Enclosure Type **	Material		Description		Image #	Key Code ***
			Casing	Cam	Key Type	Casing Type		
KIMS 0601115211	C	1 Door	Chrome Coated Zamak	Zinc coated steel	5mm Double-bit		1	KIAN 0100
KIEM D5KQ0ZS2M1	C	1 Door	Black Powder Coated Zamak	Zinc coated steel	5mm Double-bit	Padlockable	2	KIAN 0100
KIMS 0601137211	C	1 Door	Chrome Coated Zamak	Zinc coated steel	6.5mm Triangular		3	KIMSN 06737
KIMS 0601127211	C	1 Door	Chrome Coated Zamak	Zinc coated steel	8mm Triangular		4	KIMSN 06738
KIMS 0601138211	C	1 Door	Chrome Coated Zamak	Zinc coated steel	7mm Square		5	KIMSN 06727
KIMS 063110522	C	1 Door	Chrome Coated Zamak	Zinc coated steel	Euro Key		6	KIM 55333
KIMS 065110522	C	1 Door	Chrome Coated Zamak	Zinc coated steel	Euro Key	Wing Knob	7	KIM 55333
KIMS 0622021	C	1 Door	Polyamide	Zinc coated steel	-	Wing Knob	8	-
KIMS 0621122	C	1 Door	Chrome Coated Zamak	Zinc coated steel	-	Wing Knob	9	-
KIEM KEZQ0ZS2M0	C	1 Door	Chrome Coated Zamak	Zinc coated steel	-	Padlockable	10	-
KITP U6KR0PS2B0	I	2 Door	Zamak + Polyamide Lid	Zinc coated steel	6.5mm Triangular		11	KIMSN 06737
KITP U8KR0PS2B0	I	2 Door	Zamak + Polyamide Lid	Zinc coated steel	8mm Triangular		12	KIMSN 06738
KITP K7KR0PS2B0	I	2 Door	Zamak + Polyamide Lid	Zinc coated steel	7mm Square		13	KIMSN 06727

* C: Quarter Turn; I: Escutcheon
** You can see lock quantities of single door and double door enclosures on table at "Overview Page".
*** Keys should be ordered separately.





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

