



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)

Body : 1.2 / 1.5 mm

Door : 1.2 / 1.5 mm

Galvanized Steel (EN 10346 DX51D+Z)

Mounting plate : 1.5 - 2 mm

Surface Finishing

RAL7035w powder coating

IP Rating

IP65 (TS 3033, EN 60529)

Others

All welded construction

Solid / glazed door

Foamed-in door PU sealing gasket

135° concealed hinges

5mm Double-bit insert polyamide lock

Bottom gland plate

One piece PE gasket for gland plate




On Request

Custom sizes

Custom colour

Pre-punching

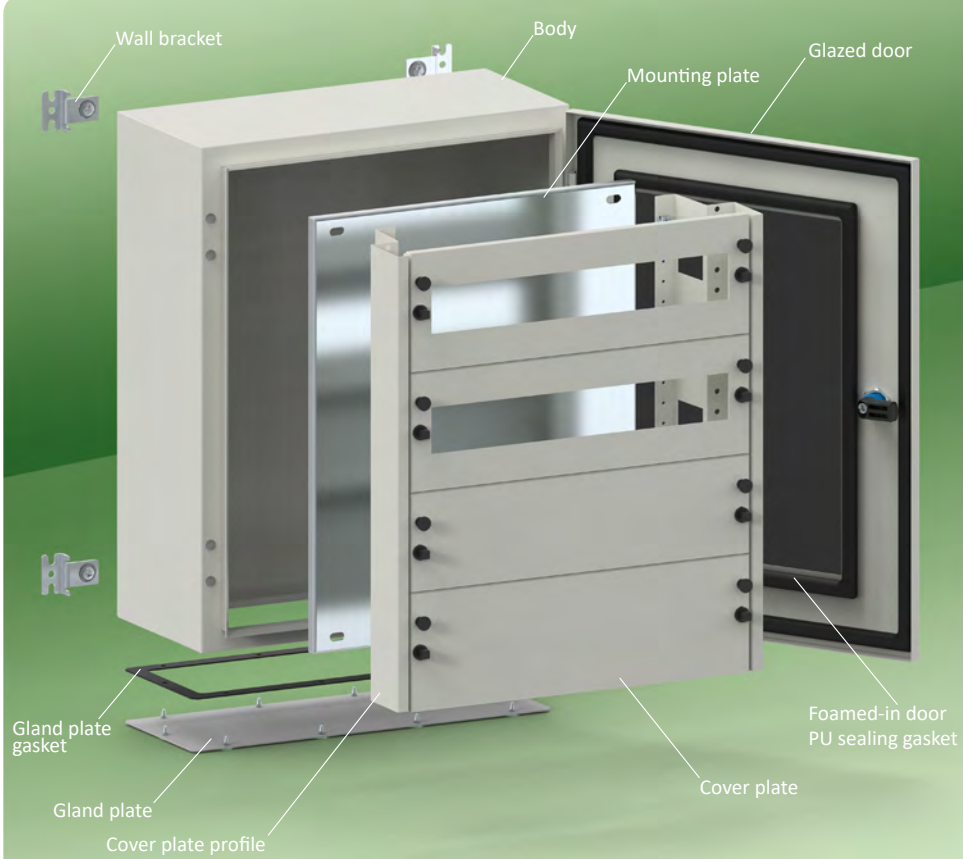

Supply Includes

Body

Door (Select ≈ K)

Mounting plate (Option ≈ M)

Cover plate set (Option ≈ P)

Gland plate with gasket

4/6 pcs wall brackets

Complementary Accessories

Rain canopy

Support base

DIN rail

Cover plate and profiles

Standoff

Door inside mounting profile

Pole fitting set


Plastic cover plate

Special locks and keys

Earthing cable

Width	Height	Depth	Reference	Door	Lock Type	Lock	Hinge	Wall Bracket	Weight	Application Options				
										Glazed Door	Cover Plate System	Standard Cover Plate Set	Rain Canopy	Support Base
A	B	C		pcs	*	pcs	pcs	pcs	**	Y / N	Y / N	Y / N	Y / N	Y / N
300	300	150	ETS xxx 030315	1	C	1	2	4	6,5	✓	–	–	✓	✓
		200	ETS xxx 030320	1	C	1	2	4	7,4	✓	✓	✓	✓	✓
	400	150	ETS xxx 030415	1	C	1	2	4	8,2	✓	–	–	✓	✓
		200	ETS xxx 030420	1	C	1	2	4	9,0	✓	✓	✓	✓	✓
		500	ETS xxx 030520	1	C	1	2	4	10,9	✓	✓	✓	✓	✓
400	400	200	ETS xxx 040420	1	C	1	2	4	11,2	✓	✓	✓	✓	✓
	500	200	ETS xxx 040520	1	C	1	2	4	13,4	✓	✓	✓	✓	✓
	600	200	ETS xxx 040620	1	C	2	2	4	14,8	✓	✓	✓	✓	✓
		250	ETS xxx 040625	1	C	2	2	4	16,7	✓	✓	–	✓	✓
500	500	200	ETS xxx 050520	1	C	1	2	4	16,0	✓	✓	✓	✓	✓
	700	200	ETS xxx 050720	1	C	2	3	4	21,2	✓	✓	✓	✓	✓
		250	ETS xxx 050725	1	C	2	3	4	22,9	✓	✓	–	✓	✓
600	600	200	ETS xxx 060620	1	C	2	2	4	22,1	✓	✓	✓	✓	✓
		200	ETS xxx 060820	1	C	2	3	4	28,0	✓	✓	✓	✓	✓
		250	ETS xxx 060825	1	C	2	3	4	29,5	✓	✓	–	✓	✓
	1000	200	ETS xxx 061020	1	C	2	3	4	34,6	✓	✓	✓	✓	✓
		250	ETS xxx 061025	1	C	2	3	4	37,0	✓	✓	–	✓	✓
800	800	200	ETS xxx 080820	1	C	2	3	4	35,2	✓	–	–	✓	✓
	1000	300	ETS xxx 081030	1	C	2	4	4	49,5	✓	–	–	✓	✓

* C: Quarter Turn
** For ETS 110 GG YY DD

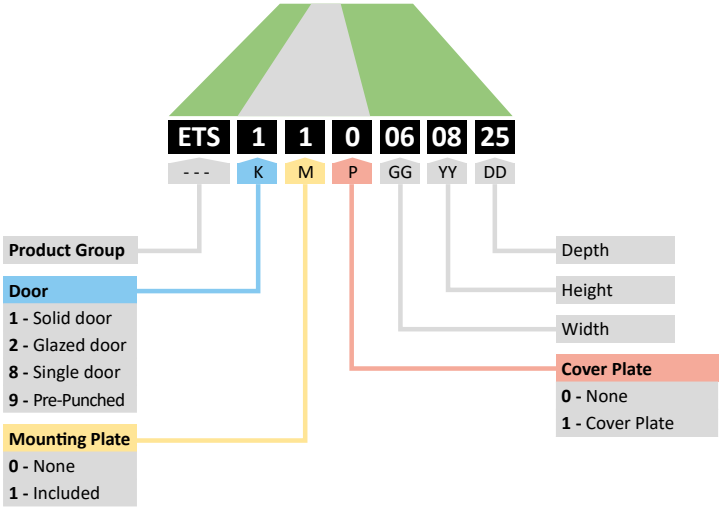

Width	Height	Depth
A	B	C
mm	mm	mm
300	300	150
		200
	400	150
		200
	500	200
400	400	200
	500	200
	600	200
		250
	500	200
		200
		250
600	600	200
	800	200
		250
	1000	200
		250
		250
800	800	200
	1000	300

K →
M →
P →
Door
pcs



Solid Door
Mounting Plate
-- --
Reference
ETS 110 030315
ETS 110 030320
ETS 110 030415
ETS 110 030420
ETS 110 030520
ETS 110 040420
ETS 110 040520
ETS 110 040620
ETS 110 040625
ETS 110 050520
ETS 110 050720
ETS 110 050725
ETS 110 060620
ETS 110 060820
ETS 110 060825
ETS 110 061020
ETS 110 061025
ETS 110 080820
ETS 110 081030



Solid Door
-- --
Cover Plate
Reference
-- --
ETS 101 030320
-- --
ETS 101 030420
ETS 101 030520
ETS 101 040420
ETS 101 040520
ETS 101 040620
-- --
ETS 101 050520
ETS 101 050720
-- --
ETS 101 060620
ETS 101 060820
-- --
ETS 101 061020
-- --
-- --
-- --




Glazed Door
Mounting Plate
-- --
Reference
ETS 210 030315
ETS 210 030320
ETS 210 030415
ETS 210 030420
ETS 210 030520
ETS 210 040420
ETS 210 040520
ETS 210 040620
ETS 210 040625
ETS 210 050520
ETS 210 050720
ETS 210 050725
ETS 210 060620
ETS 210 060820
ETS 210 060825
ETS 210 061020
ETS 210 061025
ETS 210 080820
ETS 210 081030




Glazed Door
--
Cover Plate
Reference
-- --
ETS 201 030320
-- --
ETS 201 030420
ETS 201 030520
ETS 201 040420
ETS 201 040520
ETS 201 040620
-- --
ETS 201 050520
ETS 201 050720
-- --
ETS 201 060620
ETS 201 060820
-- --
ETS 201 061020
-- --
-- --
-- --




Pre-Punched Door
Mounting Plate
-- --
Reference
ETS 910 030315
ETS 910 030320
ETS 910 030415
ETS 910 030420
ETS 910 030520
ETS 910 040420
ETS 910 040520
ETS 910 040620
ETS 910 040625
ETS 910 050520
ETS 910 050720
ETS 910 050725
ETS 910 060620
ETS 910 060820
ETS 910 060825
ETS 910 061020
ETS 910 061025
ETS 910 080820
ETS 910 081030

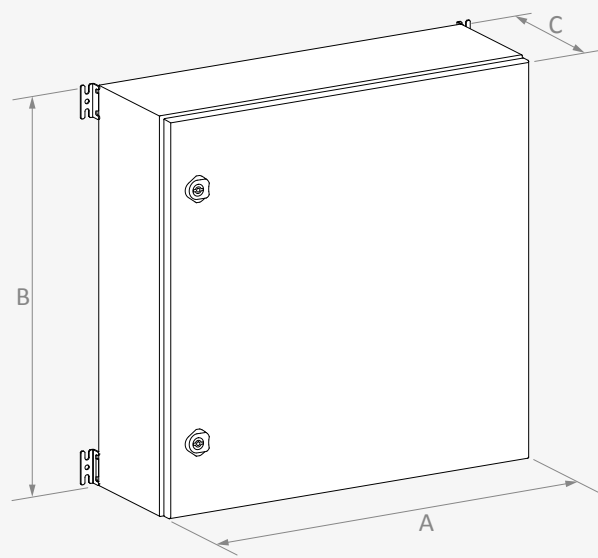


WALL MOUNTING

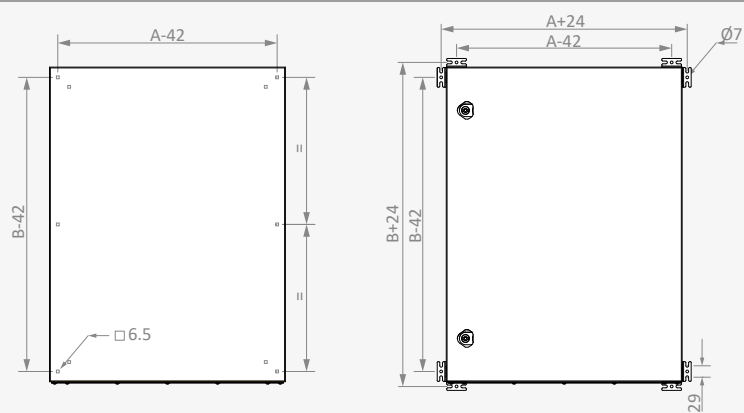


MOUNTING PLATE

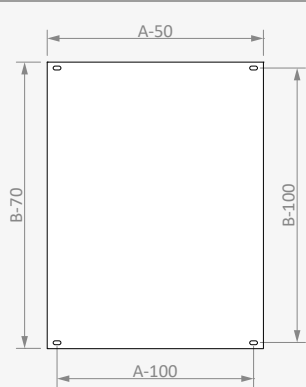


SOLID DOOR USEFUL AREA

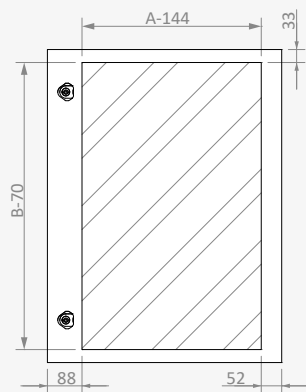


GLAZED DOOR APPARENT AREA

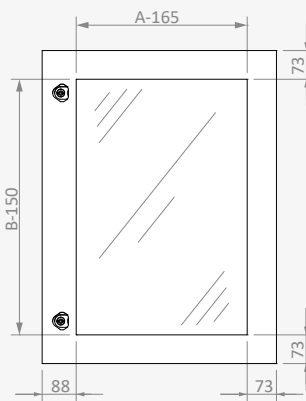

DEPTH DIMENSIONS

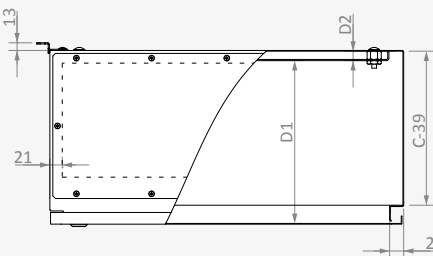

Width	Depth	D1	D2	F	Y1	Y2
A	C					
A < 600	150	129	13	59	45	23
	200	179	13	109	80	38
	300	279	13	193	160	38
A ≥ 600	200	176	16	109	80	38
	300	276	16	193	160	38

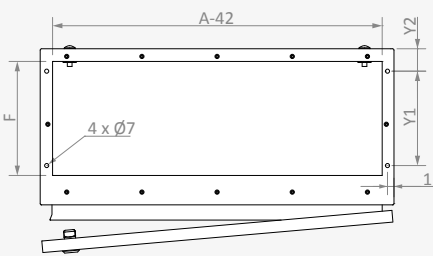


Width	Height	Depth	Reference	Useful Area			Glazed Door Apparent Area		Gland Plate			Wall Mounting						Mounting Plate	
				Door		Side	↔		↕		#	↔		↕		↕		↔	
				↔	↕	↗	↔	↕	↔	↕	pcs	↔	↕	↔	↕	↔	↕	↔	↕
mm	mm	mm		mm	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm
300	300	150	ETS xxx 030315	156	230	127	135	150	1	260	60	324	258	258	324	258	258	250	230
		200	ETS xxx 030320	156	230	177	135	150	1	260	110	324	258	258	324	258	258	250	230
	400	150	ETS xxx 030415	156	330	127	135	250	1	260	60	324	358	258	424	258	358	250	330
		200	ETS xxx 030420	156	330	177	135	250	1	260	110	324	358	258	424	258	358	250	330
		500	ETS xxx 030520	156	430	177	135	350	1	260	110	324	458	258	524	258	458	250	430
400	400	200	ETS xxx 040420	256	330	177	235	250	1	360	110	424	358	358	424	358	358	350	330
	500	200	ETS xxx 040520	256	430	177	235	350	1	360	110	424	458	358	524	358	458	350	430
	600	200	ETS xxx 040620	256	530	177	235	450	1	360	110	424	558	358	624	358	558	350	530
		250	ETS xxx 040625	256	530	227	235	450	1	360	160	424	558	358	624	358	558	350	530
500	500	200	ETS xxx 050520	356	430	177	335	350	1	460	110	524	458	458	524	458	458	450	430
	700	200	ETS xxx 050720	356	630	177	335	550	1	460	110	524	658	458	724	458	658	450	630
		250	ETS xxx 050725	356	630	227	335	550	1	460	160	524	658	458	724	458	658	450	630
600	600	200	ETS xxx 060620	456	530	177	435	450	1	560	110	624	558	558	624	558	558	550	530
		250	ETS xxx 060820	456	730	177	435	650	1	560	110	624	758	558	824	558	758	550	730
	1000	250	ETS xxx 060825	456	730	227	435	650	1	560	160	624	758	558	824	558	758	550	730
		200	ETS xxx 061020	456	930	177	435	850	1	560	110	624	958	558	1024	558	958	550	930
		250	ETS xxx 061025	456	930	227	435	850	1	560	160	624	958	558	1024	558	958	550	930
800	800	200	ETS xxx 080820	656	730	177	635	650	1	760	110	824	758	758	824	758	758	750	730
	1000	300	ETS xxx 081030	656	930	277	635	850	1	760	210	824	958	758	1024	758	958	750	930

SOLID DOOR

Reference	Width		Height		Useful Area		Door	Lock Type	Lock	Hinge	Door Thickness	Weight
	A	B			W1	H1						
	mm	mm			mm	mm						
ETS KP 0303	300	300			156	230	1	C	1	2	1.2	1.10
ETS KP 0304	300	400			156	330	1	C	1	2	1.2	1.50
ETS KP 0305	300	500			156	430	1	C	1	2	1.2	1.80
ETS KP 0404	400	400			256	330	1	C	1	2	1.2	1.90
ETS KP 0405	400	500			256	430	1	C	1	2	1.2	2.40
ETS KP 0406	400	600			256	530	1	C	2	2	1.2	2.80
ETS KP 0505	500	500			356	430	1	C	1	2	1.2	2.90
ETS KP 0507	500	700			356	630	1	C	2	3	1.2	4.00
ETS KP 0606	600	600			456	530	1	C	2	2	1.2	4.10
ETS KP 0608	600	800			456	730	1	C	2	3	1.2	5.40
ETS KP 0610	600	1000			456	930	1	C	2	3	1.2	6.70
ETS KP 0808	800	800			656	730	1	C	2	3	1.2	7.10
ETS KP 0810	800	1000			656	930	1	C	2	4	1.5	11.10

Characteristics		Supply Includes
Material	DIN EN 10130 DC01 CCRS	Lock
Surface Finishing	RAL7035w powder coating	Double door gutter Conta

* C: Quarter Turn

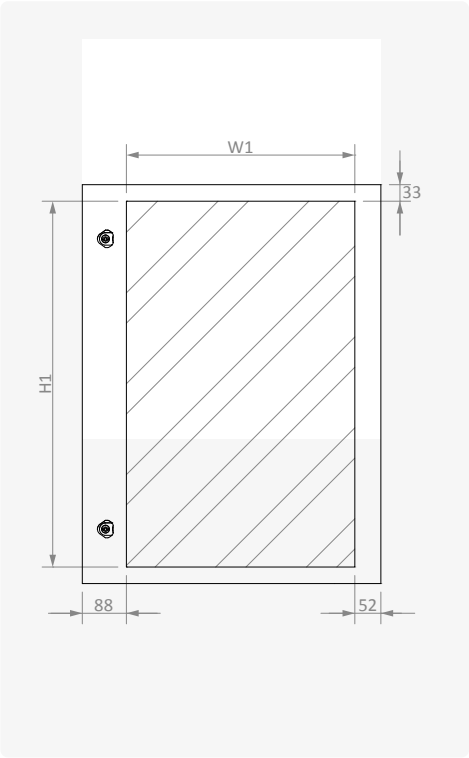


GLAZED DOOR

Reference	Width		Height		Apparent Area		Lock Type	Lock	Hinge	Door Thickness	Weight
	A	B			W6	H6					
	mm	mm			mm	mm					
ETS KPX 0303	300	300			135	150	C	1	2	1.2	1.20
ETS KPX 0304	300	400			135	250	C	1	2	1.2	1.60
ETS KPX 0305	300	500			135	350	C	1	2	1.2	2.00
ETS KPX 0404	400	400			235	250	C	1	2	1.2	2.10
ETS KPX 0405	400	500			235	350	C	1	2	1.2	2.60
ETS KPX 0406	400	600			235	450	C	2	2	1.2	3.10
ETS KPX 0505	500	500			335	350	C	1	2	1.2	3.20
ETS KPX 0507	500	700			335	550	C	2	3	1.2	4.40
ETS KPX 0606	600	600			435	450	C	2	2	1.2	4.50
ETS KPX 0608	600	800			435	650	C	2	3	1.2	6.00
ETS KPX 0610	600	1000			435	850	C	2	3	1.2	7.40
ETS KPX 0808	800	800			635	650	C	2	3	1.2	7.80
ETS KPX 0810	800	1000			635	850	C	2	4	1.5	10.70

Characteristics		Supply Includes
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass	Lock
Surface Finishing	RAL7035w powder coating	* C: Quarter Turn


Characteristics		Supply Includes
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass	Lock
Surface Finishing	RAL7035w powder coating	* C: Quarter Turn

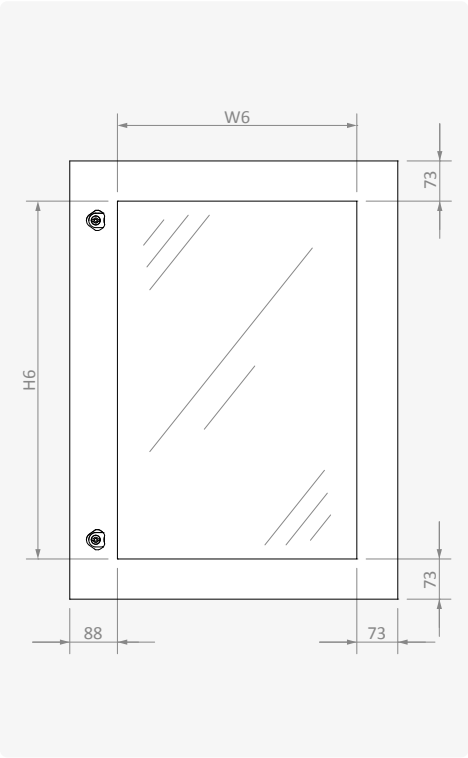

MOUNTING PLATE

Reference	Width	Height	External Dimensions			Mounting Dimensions			Thickness	Weight
	A mm	B mm	X1 mm	Y1 mm	Z mm	X2 mm	Y2 mm	D mm		
ETS TS 0303	300	300	250	230	12	Center	200	M6	1.5	1.0
ETS TS 0304	300	400	250	330	12	Center	300	M6	1.5	1.4
ETS TS 0305	300	500	250	430	12	Center	400	M6	1.5	1.8
ETS TS 0404	400	400	350	330	12	300	300	M6	1.5	1.9
ETS TS 0405	400	500	350	430	12	300	400	M6	1.5	2.5
ETS TS 0406	400	600	350	530	12	300	500	M6	1.5	3.1
ETS TS 0505	500	500	450	430	12	400	400	M6	1.5	3.3
ETS TS 0507	500	700	450	630	12	400	600	M6	1.5	4.8
ETS TS 0606	600	600	550	530	15	500	500	M8	1.5	5.0
ETS TS 0608	600	800	550	730	15	500	700	M8	1.5	6.9
ETS TS 0610	600	1000	550	930	15	500	900	M8	1.5	8.7
ETS TS 0808	800	800	750	730	15	700	700	M8	1.5	8.8
ETS TS 0810	800	1000	750	930	15	700	900	M8	2.0	11.7


Characteristics	
Material	DIN EN 10346 DX51D+Z galvanized
Thickness	1.5 - 2 mm

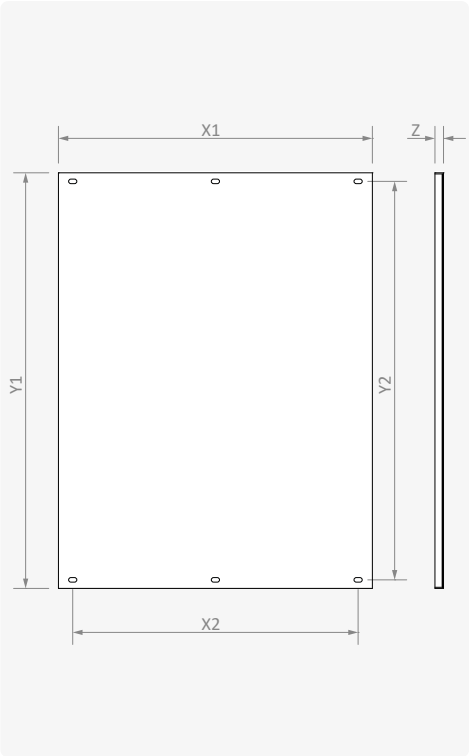

STANDARD COVER PLATE SET

Reference	Width	Height	Cover Plate Quantity	Capacity	Module Cut-Out		Solid Cover Plate			
	A mm	B mm			Height 120	Height 160	Height 100	Height 120	Height 140	Height 160
			pcs	Module						
ETS PT 0303	300	300	2	12		1		1		
ETS PT 0304	300	400	3	24	1	1	1			
ETS PT 0305	300	500	4	24	1	1	2			
ETS PT 0404	400	400	3	36	1	1	1			
ETS PT 0405	400	500	4	36	1	1	2			
ETS PT 0406	400	600	4	54	1	2			1	
ETS PT 0505	500	500	3	48		2				1
ETS PT 0507	500	700	5	72	1	2		2		
ETS PT 0606	600	600	4	87	1	2			1	
ETS PT 0608	600	800	6	116	2	2	1	1		
ETS PT 0610	600	1000	7	145	1	4	1	1		

Characteristics		Supply Includes
Material	DIN EN 10130 DC01 CCR5	Cover plates / Cover plate profiles
Surface Finishing	RAL7035w powder coating	Cover plate profile fasteners




COVER PLATES

Reference	Width	External Dimensions		Useful Area	Module Cut-Out		Weight
	A mm	X1 mm	Y1 mm	X2 mm	X3 mm	Capacity Module	
ETS PL 3010	300	268	98	225	-	-	0.3
ETS PL 3012	300	268	118	225	-	-	0.3
ETS PL 3016	300	268	158	225	-	-	0.4
ETS PL 4010	400	368	98	325	-	-	0.3
ETS PL 4012	400	368	118	325	-	-	0.4
ETS PL 4016	400	368	158	325	-	-	0.5
ETS PL 5010	500	468	98	425	-	-	0.4
ETS PL 5012	500	468	118	425	-	-	0.4
ETS PL 5016	500	468	158	425	-	-	0.7
ETS PL 6010	600	568	98	525	-	-	0.5
ETS PL 6012	600	568	118	525	-	-	0.6
ETS PL 6016	600	568	158	525	-	-	0.8
ETS PL 3012W	300	268	118	-	215	12	0.2
ETS PL 3016W	300	268	158	-	215	12	0.3
ETS PL 4012W	400	368	118	-	320	18	0.3
ETS PL 4016W	400	368	158	-	320	18	0.4
ETS PL 5012W	500	468	118	-	425	24	0.4
ETS PL 5016W	500	468	158	-	425	24	0.5
ETS PL 6012W	600	568	118	-	515	29	0.4
ETS PL 6016W	600	568	158	-	515	29	0.6

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	0.9 mm


Supply Includes	
■ Cover plate profiles fasteners and plastic nuts	
■ Handles	

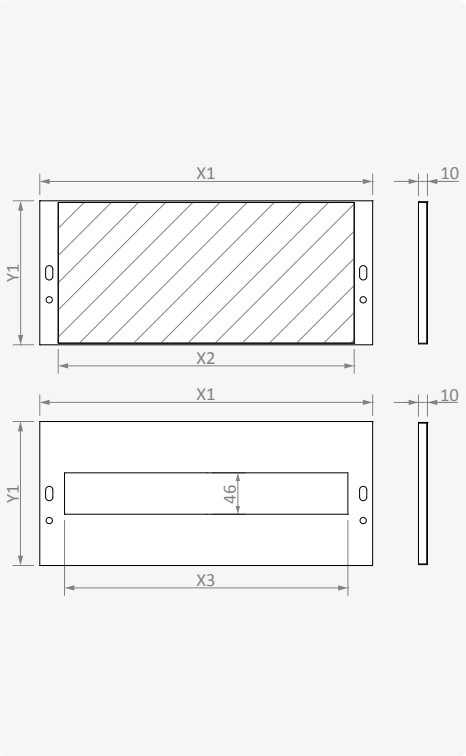

COVER PLATE PROFILE

Reference	Height	External Dimensions	Packet	Weight
	B mm			
ETS PR 030	300	250	2	0.7
ETS PR 040	400	350	2	1.0
ETS PR 050	500	450	2	1.3
ETS PR 060	600	550	2	1.5
ETS PR 070	700	650	2	1.8
ETS PR 080	800	750	2	2.1
ETS PR 100	1000	950	2	2.6

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.2 mm


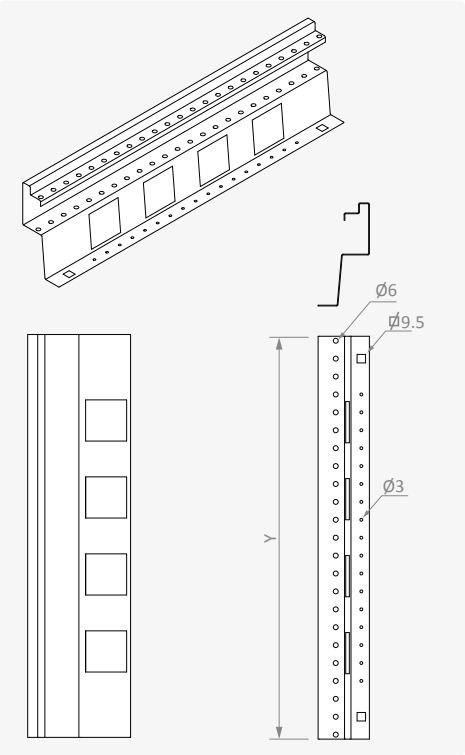


RAIN CANOPY

Reference	Width		Depth		External Dimensions		Mounting Dimensions			Weight kg
	A	C			X1	Z1	X2	Z2	Z3	
	mm	mm			mm	mm	mm	mm	mm	
ETS HS 0315	300	150			325	175	278	45	23	1.1
ETS HS 0320	300	200			325	225	278	80	38	1.6
ETS HS 0420	400	200			425	225	378	80	38	2.0
ETS HS 0425	400	250			425	275	378	110	38	2.6
ETS HS 0520	500	200			525	225	478	80	38	2.4
ETS HS 0525	500	200			525	225	478	80	38	2.4
ETS HS 0620	600	200			625	225	578	80	38	2.7
ETS HS 0625	600	250			625	275	578	110	38	3.5
ETS HS 0820	800	200			825	225	778	80	38	3.6
ETS HS 0830	800	300			825	325	778	160	38	4.7

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.2 mm

Supply Includes
■ Mounting fasteners

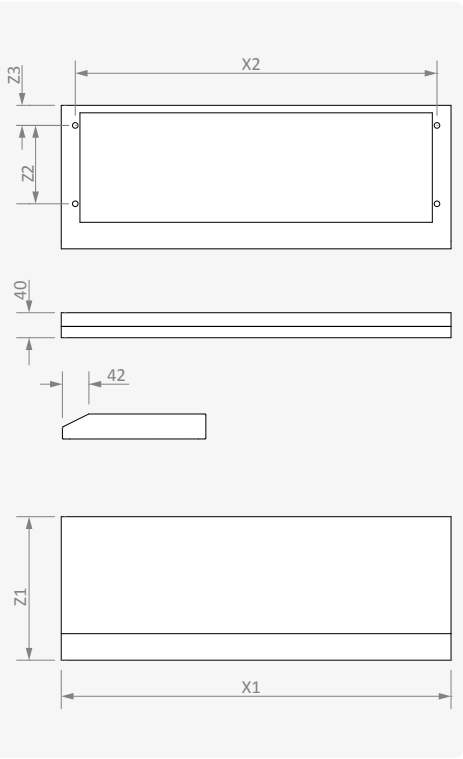
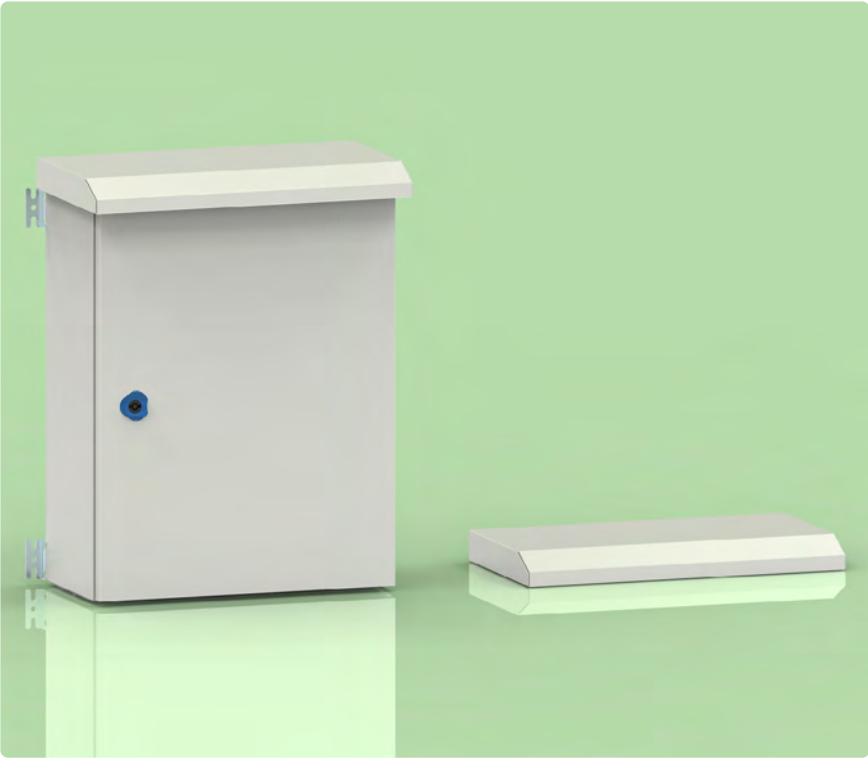


SUPPORT BASE

Width A mm	Depth C mm	Reference	Reference	External Dimensions		Mounting Dimensions				Weight kg
				X1	Z1	X2	Z2	X3	Z3	
				mm	mm	mm	mm	mm	mm	
300	150	PNETSATG03	PNETSATD15	478	270	448	218	278	45	3,2
300	200	PNETSATG03	PNETSATD20	478	320	448	268	278	80	3.4
400	200	PNETSATG04	PNETSATD20	578	320	548	268	378	80	3.5
400	250	PNETSATG04	PNETSATD20	578	320	548	268	378	80	3.5
500	200	PNETSATG05	PNETSATD20	678	320	648	268	478	80	3.8
500	250	PNETSATG05	PNETSATD20	678	320	648	268	478	80	3.8
600	200	PNETSATG06	PNETSATD20	778	320	748	268	578	80	4.0
600	250	PNETSATG06	PNETSATD20	778	320	748	168	578	80	4.0
800	200	PNETSATG08	PNETSATD20	978	320	948	268	778	80	4.3
800	300	PNETSATG08	PNETSATD30	978	420	948	368	778	160	4.6

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm

Supply Includes
■ Mounting fasteners

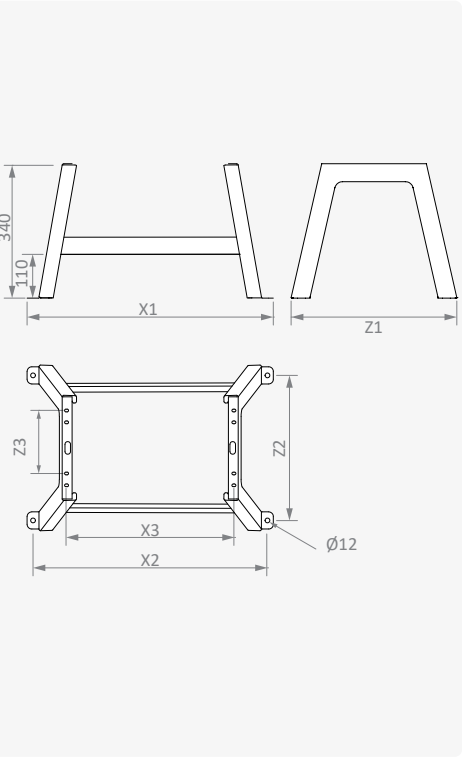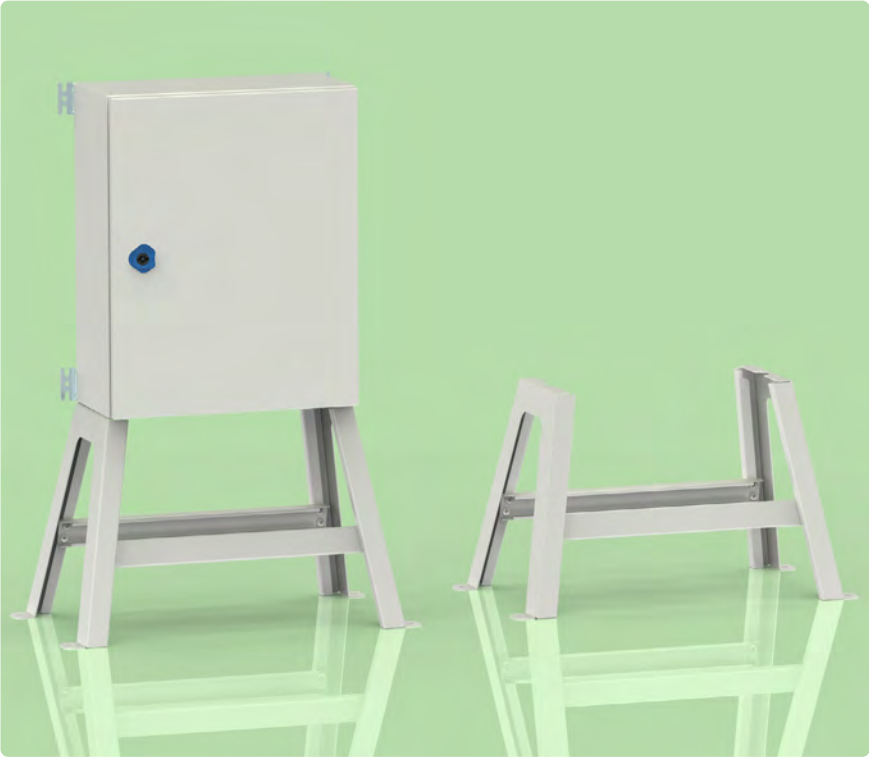


CABLE GLAND PLATE

Reference	Width	Depth	External Dimensions		Useful Area		Weight kg
	A	C	X1	Z1	X2	Z2	
	mm	mm	mm	mm	mm	mm	
ETS GP 3015	300	150	290	96	260	60	0.4
ETS GP 3020	300	200	290	146	260	110	0.6
ETS GP 4015	400	150	390	96	360	59	0.5
ETS GP 4020	400	200/250	390	146	360	110	0.7
ETS GP 5020	500	200/250	490	146	460	110	0.9
ETS GP 6020	600	200/250	590	146	560	110	1.1
ETS GP 8020	800	200	790	146	760	110	1.4
ETS GP 8030	800	300	790	246	760	193	2.4



Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
One piece PE Conta	
Mounting fasteners	

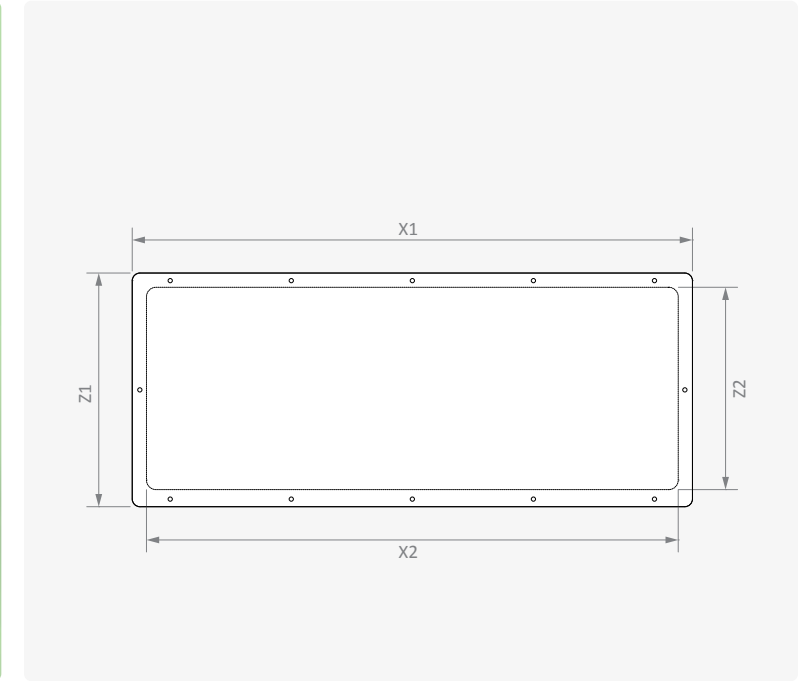


WALL BRACKETS

Reference	Packet	Weight	Characteristics		Supply Includes
	pcs/packet	kg/packet	Material	DIN EN 10130 DC01 CCRS	
AK KL 0010	4	0.16	Surface Finishing	Zinc coated Cr ⁺³ passivation	Wall mounting screws
AK KL 0011	6	0.25	Thickness	2 mm	

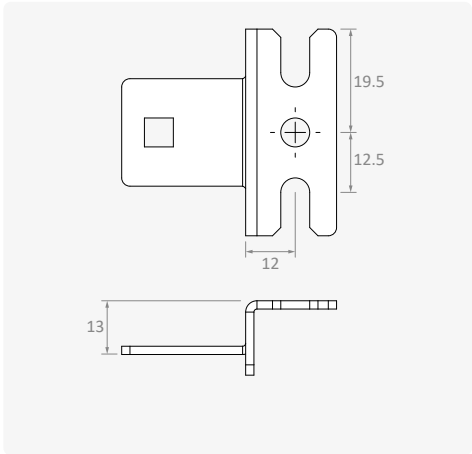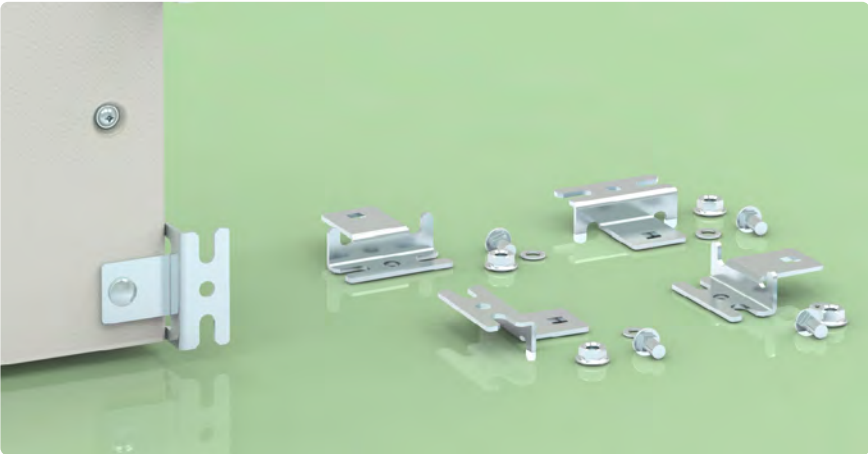


MOUNTING PROFILE INSIDE DOOR

Reference	Height	Length	Weight	Characteristics	
	B	Y1		Material	20x20 square profile galvanized
AS KU Y00400	300	220	1.1	Thickness	1.2 mm
AS KU Y00500	400	320	1.2		
AS KU Y00600	500	420	0.3		
AS KU DRM100	600	520	0.4		
AS KU Y00800	700	620	0.4		
AS KU D00900	800	720	0.5		
AS KU DRM120	1000	920	0.6		

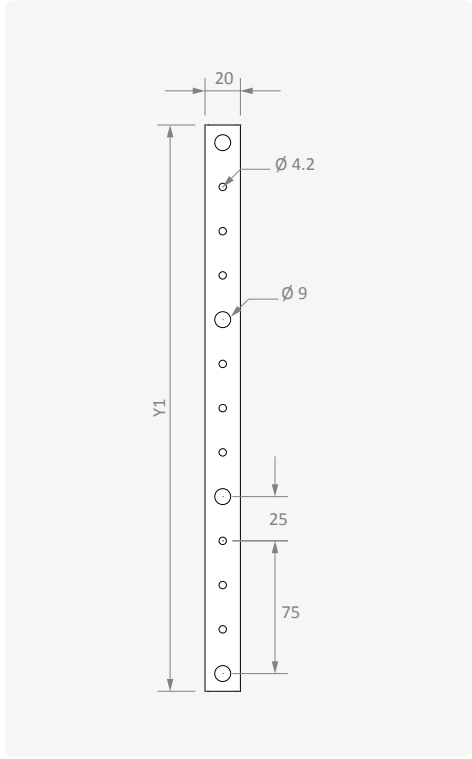

PLASTIC COVER PLATE


Reference	Width	Packet	Weight	Characteristics	
	Module	pcs/packet	kg/packet	Material	ABS
SI OP 00000010	4	50	0.35	Separable 4 pieces	



STANDOFF

Reference	External Dimensions	Width Across Flats	Connection	Packet	Weight
	H mm	L mm			
HD BM 00000196	25	13	M6 / M6	20	0.5
HD BM 00000200	50				1.1
HD BM 00000240	75				1.6
HD BM 00000210	125				2.3
HD BM 00000220	50	17	M8 / M8	20	1.8
HD BM 00000230	125				4.7


Characteristics	
■ Material	Hexagonal free-cutting steel
■ Surface Finishing	Zinc coated; Cr ⁺³ passivation
■ Connection	male/female

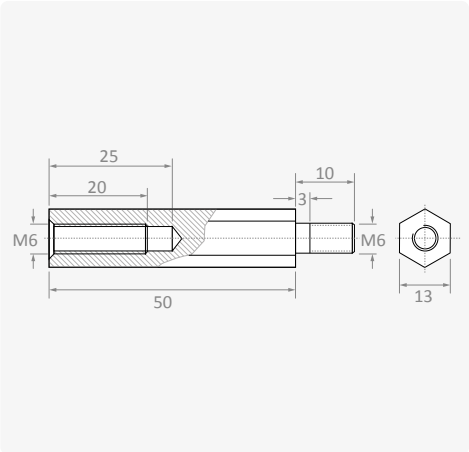

DIN RAILS


Reference	Width mm	Height mm	Hole Yes/No	Length m	Weight kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Zinc coated Cr ⁺³ passivation
■ Standards	DIN EN 60715

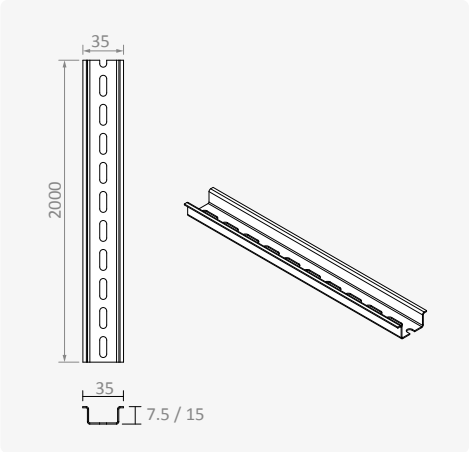

EARTHING CABLE

Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm			
KBOZ 06 01908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.2
KB TP 16092200	Nickel Plated, Braided Copper Conductor	16	200	M8-M8	10	0.3

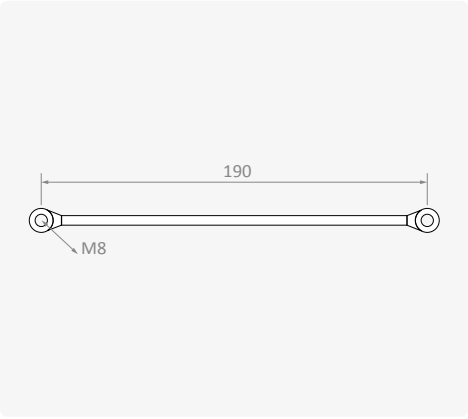

LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
		Casing	Cam	Key Type	
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn;
** Keys should be ordered separately.




SPECIAL LOCKS AND KEYS

Reference	Lock Type	Material		Description		Image #	Key Code
		Casing	Cam	Key Type	Casing Type		
KIMS 0601115211	C	Chrome Coated Zamak	Zinc coated steel	5mm Double-bit		1	KIAN 0100
KIEM D5KQ0ZS2M1	C	Black Powder Coated Zamak	Zinc coated steel	5mm Double-bit	Padlockable	2	KIAN 0100
KIMS 0601137211	C	Chrome Coated Zamak	Zinc coated steel	6.5mm Triangular		3	KIMSN 06737
KIMS 0601127211	C	Chrome Coated Zamak	Zinc coated steel	8mm Triangular		4	KIMSN 06738
KIMS 0601138211	C	Chrome Coated Zamak	Zinc coated steel	7mm Square		5	KIMSN 06727
KIMS 063110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key		6	KIM 55333
KIMS 065110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key	Wing Knob	7	KIM 55333
KIMS 0622021	C	Polyamide	Zinc coated steel	-	Wing Knob	8	-
KIMS 0621122	C	Chrome Coated Zamak	Zinc coated steel	-	Wing Knob	9	-
KIEM KEZQ0ZS2M0	C	Chrome Coated Zamak	Zinc coated steel	-	Padlockable	10	-

* C: Quarter Turn; You can see lock quantities of single door and double door enclosures on table at "Overview Page".
** Keys should be ordered separately.





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

