



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Stainless Steel 430 (EN 10088 1.4016)

■ Body : 1.2 mm

■ Door : 1.2 mm

Galvanized Steel (EN 10346 DX51D+Z)

■ Mounting plate : 1.5 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating

■ IP66 (TS 3033, EN 60529)

Others

■ All welded construction

■ Solid door

■ Foamed-in door PU sealing gasket

■ 135° concealed hinges

■ 5mm Double-bit insert chrome coated zamak lock

■ Bottom gland plate


■ Door stay

On Request

■ Custom sizes

■ Custom colour

■ Pre-punching

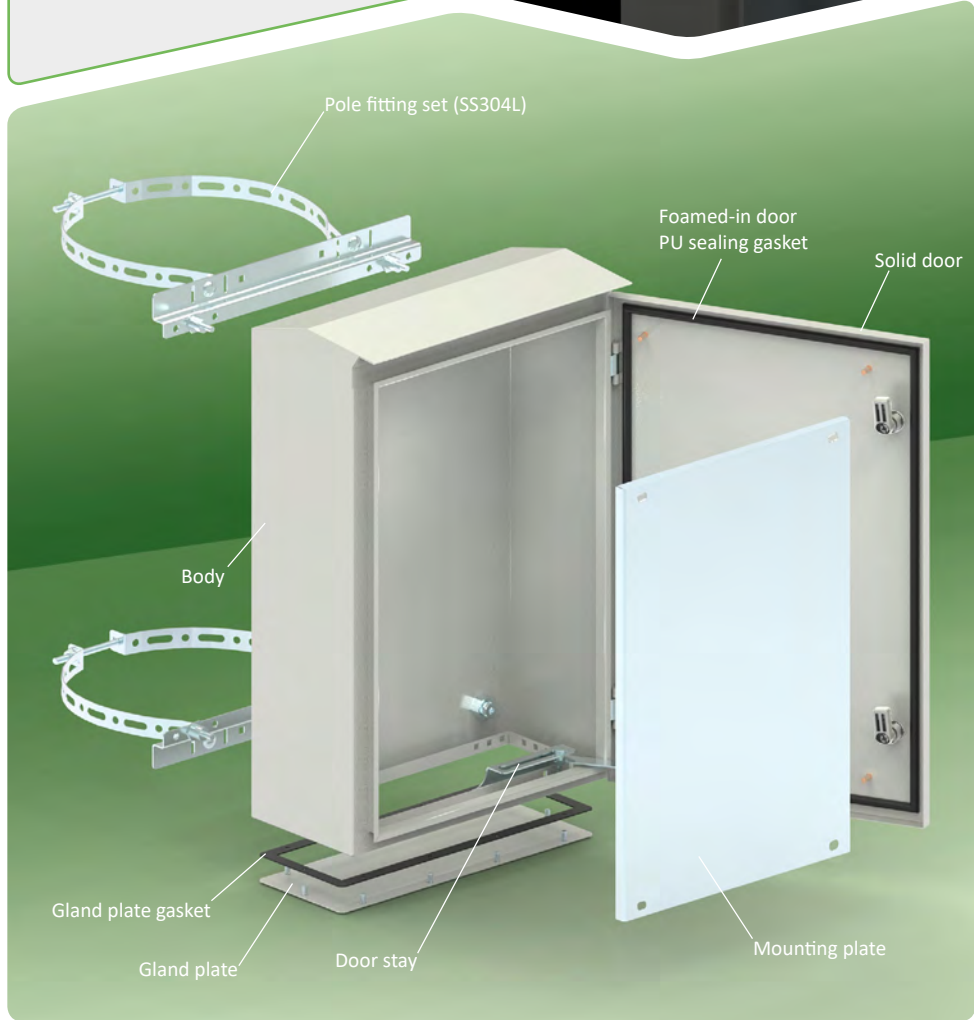

Supply Includes

■ Body

■ Door

■ Mounting plate

■ Door stay

■ Gland plate with gasket

Complementary Accessories

■ Cover plate and profiles

■ Standoff

■ Door inside mounting profile

■ Special locks and keys




■ Earthing cable

■ Pole fitting set



Width	Height	Depth	Reference	Lock Type	Lock	Hinge	Useful Area			Cable Gland			Mounting Plate	
							Door		Depth					
A	B	C	Reference	*	pcs	pcs	↔	↕	↗	pcs	↔	↗	↔	↕
mm	mm	mm					mm	mm	mm		mm	mm	mm	mm
300	400	200	HDS 030420	C	1	2	156	330	177	1	260	110	250	330
400	600	200	HDS 040620	C	2	2	256	530	177	1	360	110	350	530
500	700	200	HDS 050720	C	2	3	356	630	177	1	460	110	450	630
600	600	200	HDS 060620	C	2	2	456	530	177	1	560	110	550	530
	800	250	HDS 060825	C	2	3	456	730	227	1	560	110	550	730


* C: Quarter Turn

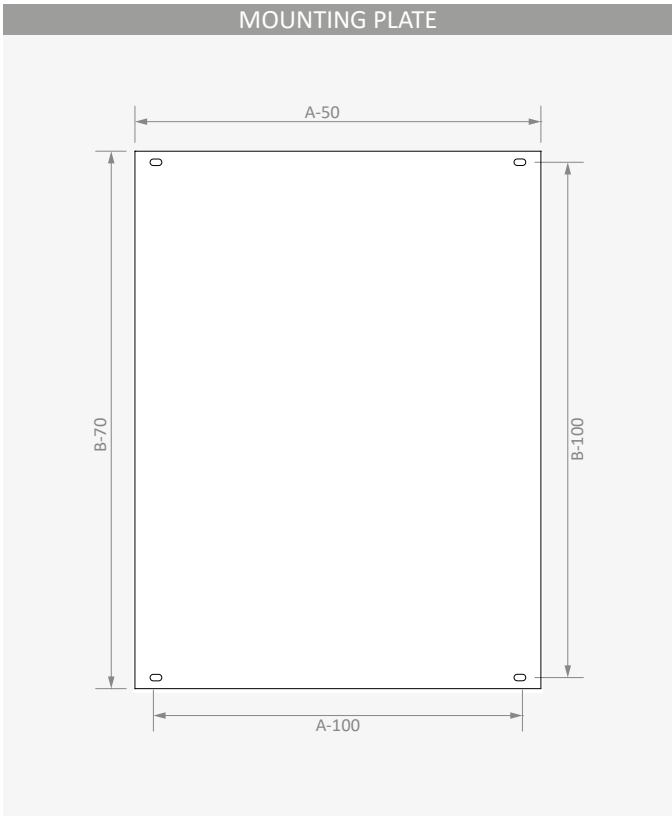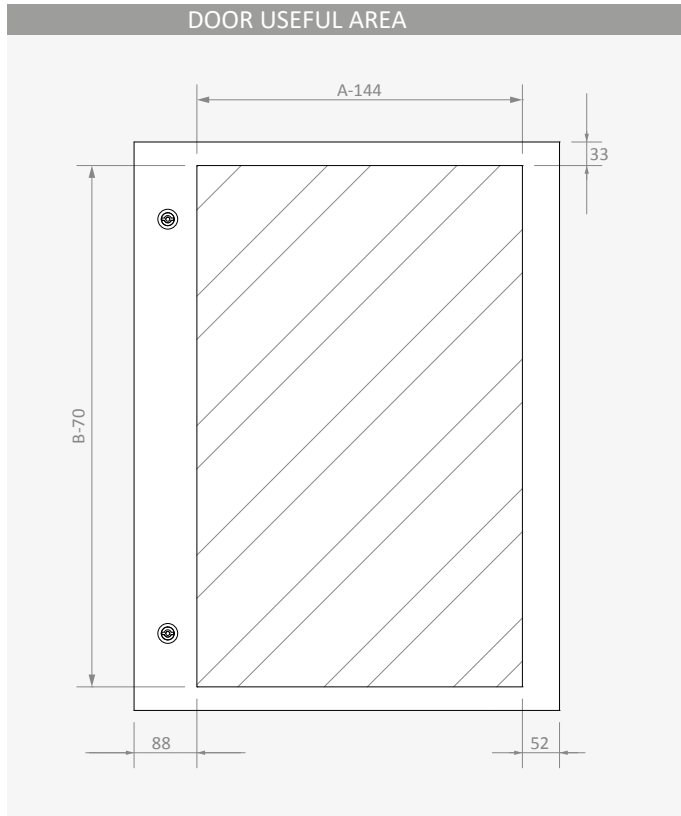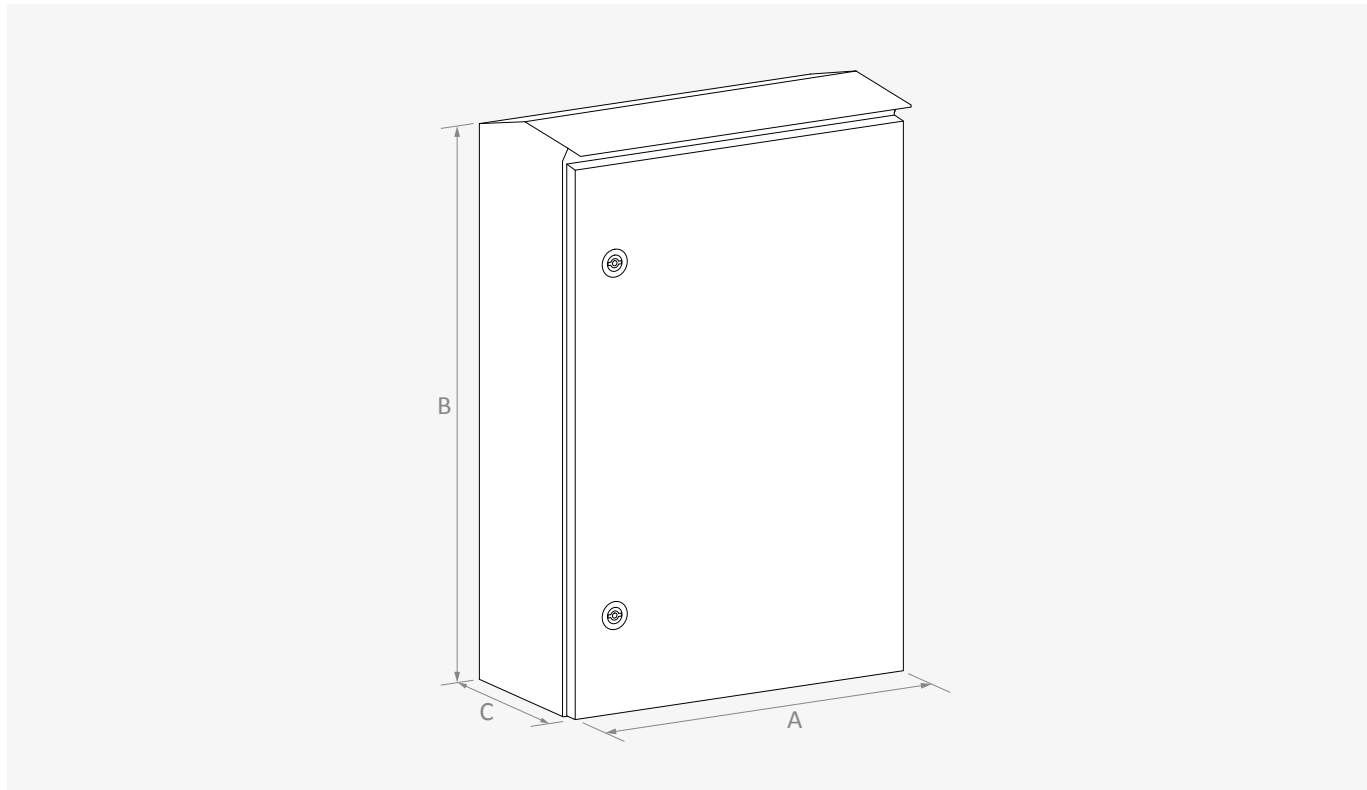

SOLID DOOR

Reference	Width	Height	Useful Area		Door	Lock Type	Lock	Hinge	Weight
	A mm	B mm	W1 mm	H1 mm					
HDS KP 0304	300	400	156	330	1	C	1	2	1.5
HDS KP 0406	400	600	256	530	1	C	2	2	2.8
HDS KP 0507	500	700	356	630	1	C	2	3	4.0
HDS KP 0606	600	600	456	530	1	C	2	2	4.1
HDS KP 0608	600	800	456	730	1	C	2	3	5.4


Characteristics		Supply Includes	
Material	Stainless Steel 430 (EN 10088 1.4016)	Lock	
Surface Finishing	RAL7035w powder coating	* C: Quarter Turn	
Thickness	1.2 mm		

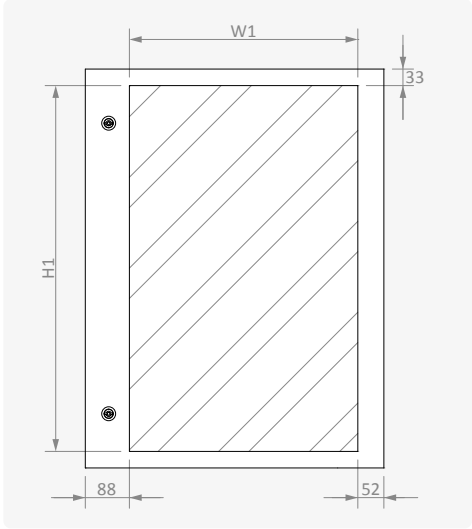

GLAND PLATE

Reference	Width	Depth	External Dimensions		Useful Area		Weight
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
HDS GP 3020	300	200	290	146	260	110	0.6
HDS GP 4020	400	200	390	146	360	110	0.7
HDS GP 5020	500	200	490	146	460	110	0.9
HDS GP 6020	600	200	590	146	560	110	1.1
HDS GP 6025	600	250	590	146	560	110	1.1


Characteristics		Supply Includes	
Material	Stainless Steel 430 (EN 10088 1.4016)	Foamed-in door PU sealing Conta	
Surface Finishing	RAL7035w powder coating	Mounting fasteners	
Thickness	1.5 mm		

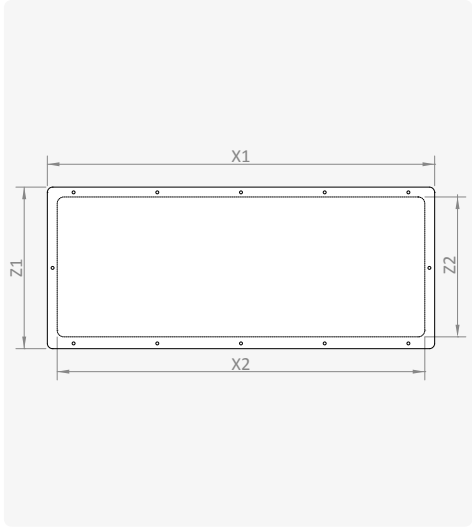

MOUNTING PLATE

Reference	Width	Height	External Dimensions			Mounting Dimensions			Weight
	A mm	B mm	X1 mm	Y1 mm	Z mm	X2 mm	Y2 mm	D mm	
ETS TS 0304	300	400	250	330	12	200	300	M8	1.4
ETS TS 0507	500	700	450	630	12	400	600	M8	4.8
ETS TS 0606	600	600	550	530	15	500	500	M8	5.0
ETS TS 0608	600	800	550	730	15	500	700	M8	6.9


Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

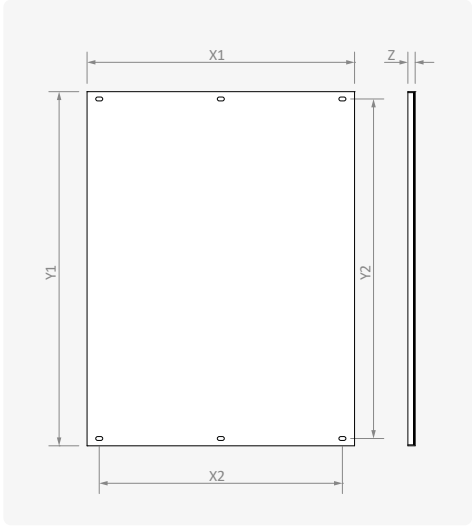

POLE FITTING SET

Reference	Width	Paket	Weight
	A mm	pcs set	kg set
HDS DBS 030	300	2	0.9
HDS DBS 040	400	2	1.3
HDS DBS 050	500	2	1.6
HDS DBS 060	600	2	1.9
HDS DBS 060-3	600	3	2.4
HDS DBS 080	800	3	2.6

Characteristics		Supply Includes	
Material	Stainless Steel 304L (EN 10088 1.4307)	Mounting fasteners	
Thickness	1.2 - 2 mm		

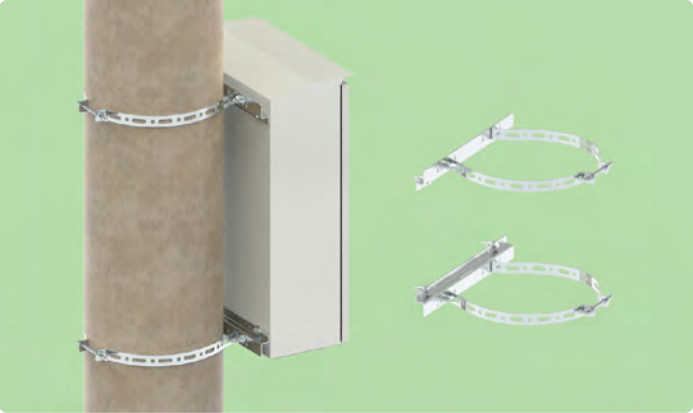


DOOR STAY

Reference	Set	Weight
	pcs/set	kg/set
EKO KD 010	1	0.2

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting fasteners	





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

