



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

- Sheet Steel (EN 10130 DC01)
 - Body : 1.2 mm
 - Lid : 1.2 mm
- Galvanized Steel (EN 10346 DX51D+Z)
 - Mounting plate : 1.5 mm

Surface Finishing

- RAL7035w powder coating

IP Rating


- KBP IP65 (TS 3033, EN 60529)

Others

- All welded construction
- Screwed plain lid
- Foamed-in lid PU sealing gasket
- Ready for mounting plate and DIN rail fixing
- Top and bottom gland plates
- One piece PE gasket for gland plate

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Glazed lid

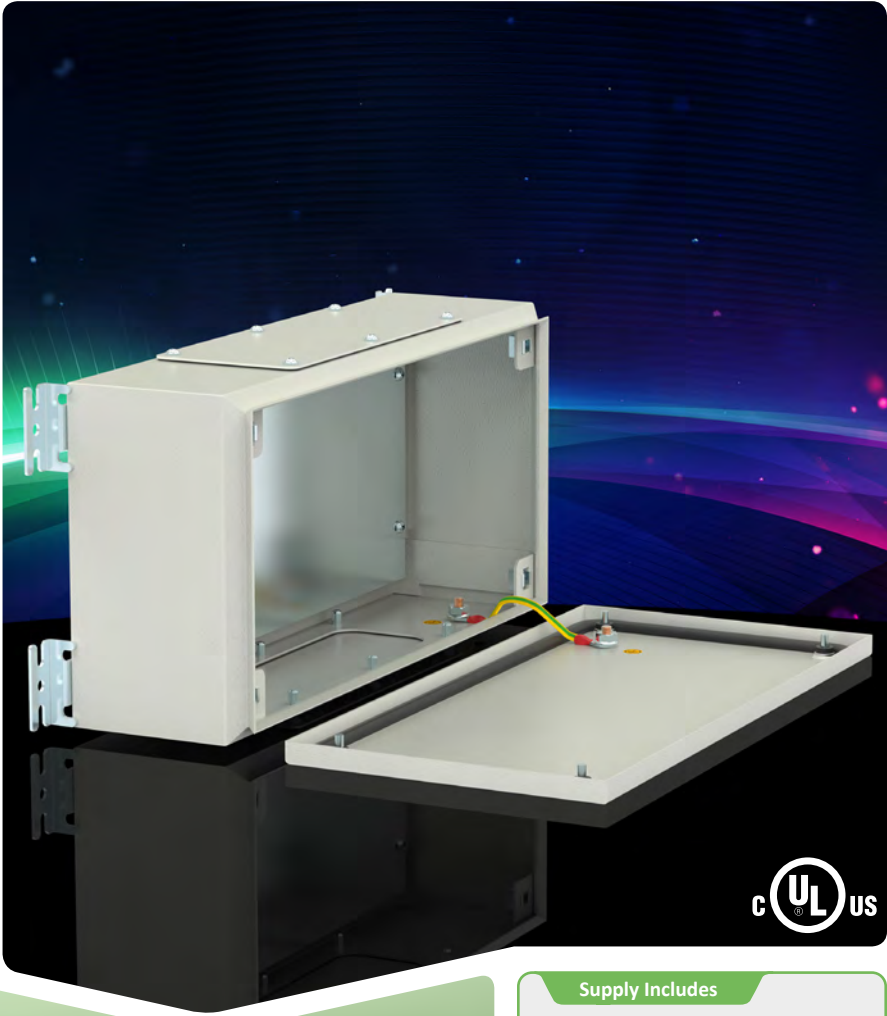


Supply Includes


- Body
- Lid
- Lid screws
- 2/4 pcs gland plates with gasket

Complementary Accessories


- DIN rail
- Mounting plate
- Earthing cable
- 4 pcs wall brackets

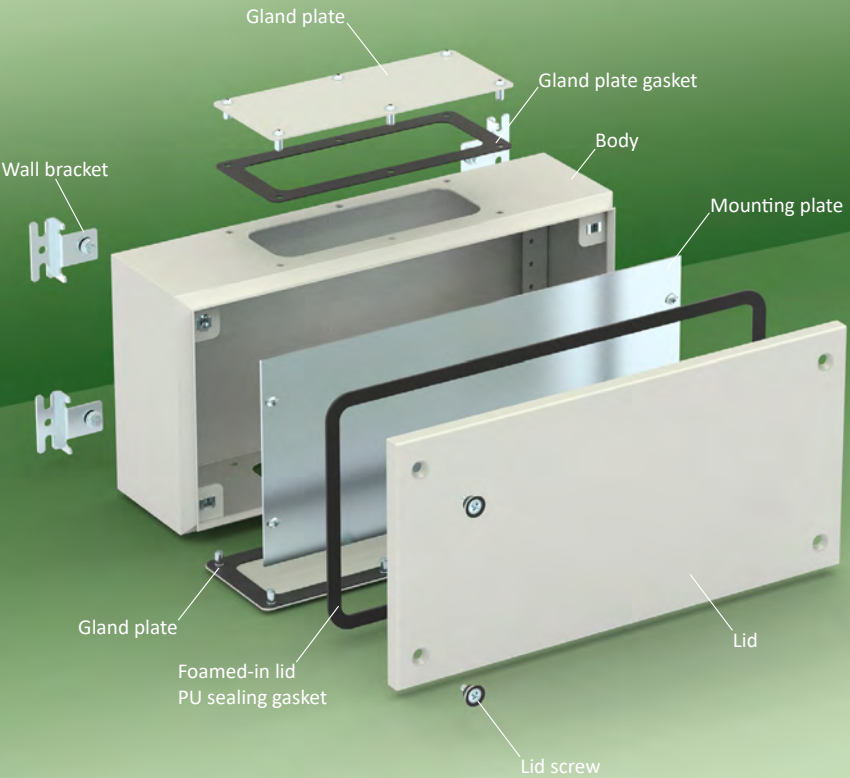


Width A	Height B	Depth C	Reference	Useful Area			Gland Plate			Wall Mounting				DIN Rail Fixing		Mounting Plate		Weight
				Lid		Side	#	↔	↗	Side		Up/Down		↔	↔	↕		
				↔	↕	↗				↔	↕	↔	↕					
mm	mm	mm		mm	mm	mm	ad	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
300	200	120	KBP 302012	260	160	86	2	188	64	324	158	258	224	258	275	170	3.9	
	300	120	KBP 303012	260	260	86	2	188	64	324	258	258	324	2 x 258	275	270	5.2	
400	200	120	KBP 402012	360	160	86	2	188	64	424	158	358	224	358	375	170	4.8	
	300	120	KBP 403012	360	260	86	2	188	64	424	258	358	324	2 x 358	375	270	6.2	
	400	120	KBP 404012	360	360	86	2	188	64	424	358	358	424	2 x 358	375	370	7.8	
600	300	120	KBP 603012	560	260	86	4	188	64	624	258	558	324	2 x 558	575	270	8.7	
	400	120	KBP 604012	560	360	86	4	188	64	624	358	558	424	2 x 558	575	370	11.0	

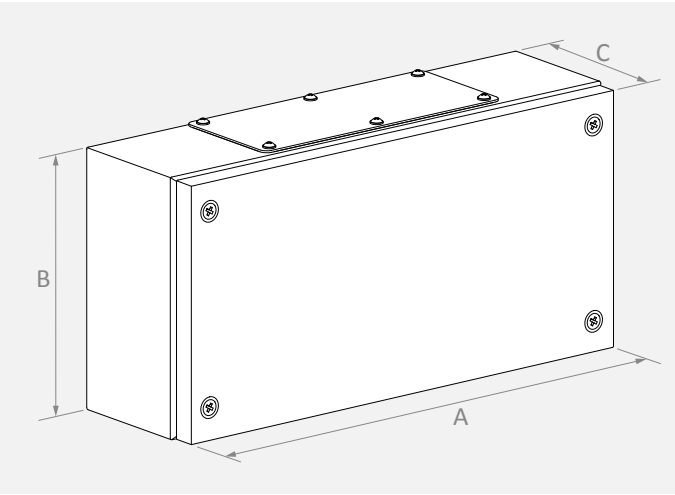


LID USEFUL AREA

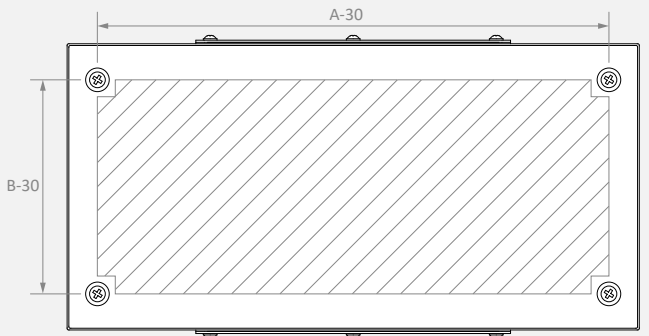


WALL MOUNTING

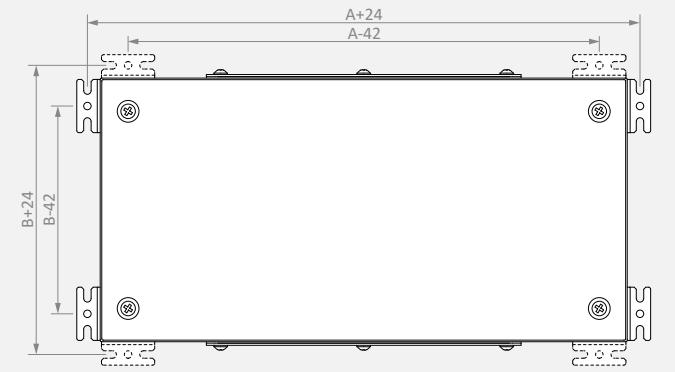


CABLE GLAND

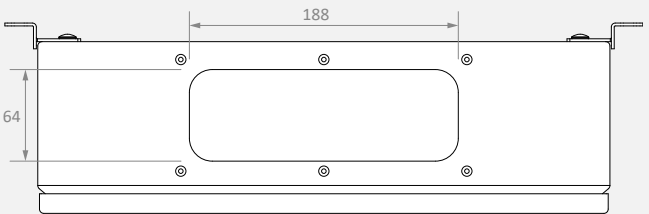



DEPTH DIMENSIONS





MOUNTING PLATE

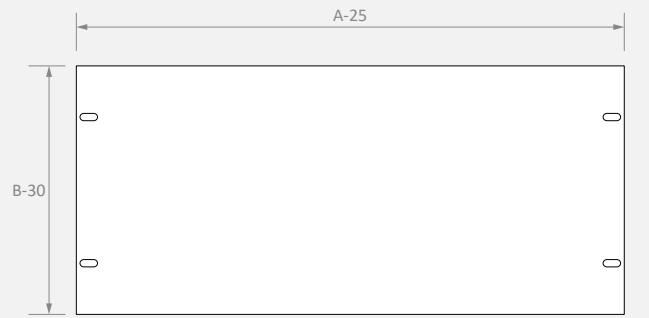



MOUNTING PLATE							
Reference	Width	Height	External Dimensions		Mounting Dimensions		Weight
	A mm	B mm	X1 mm	Y1 mm	X2 mm	Y2 mm	
KB TS 15 15	150	150	125	120	108	---	0.2
KB TS 20 20	200	200	175	170	158	100	0.5
KB TS 30 20	300	200	275	170	258	100	0.8
KB TS 30 30	300	300	275	270	258	200	1.2
KB TS 40 20	400	200	375	170	358	100	1.1
KB TS 40 30	400	300	375	270	358	200	1.6
KB TS 40 40	400	400	375	370	358	300	2.2
KB TS 60 30	600	300	575	270	558	200	2.5
KB TS 60 40	600	400	575	370	558	300	3.4
Characteristics							
■ Material	DIN EN 10346 DX51D+Z galvanized						
■ Thickness	1.5 mm						

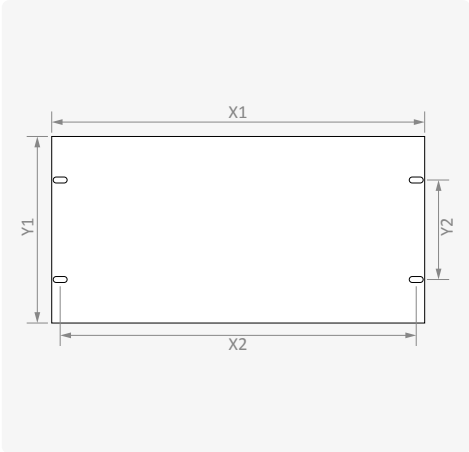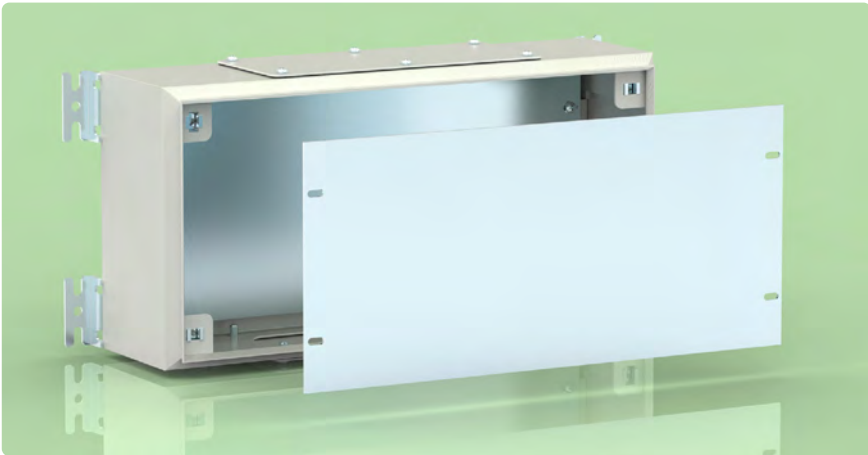



DIN RAILS					
Reference	Width mm	Height mm	Hole Yes/No	Length m	Weight kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2
Characteristics					
■ Material	DIN EN 10130 DC01 CCRS				
■ Surface Finishing	Zinc coated Cr ³ passivation				
■ Standards	DIN EN 60715				

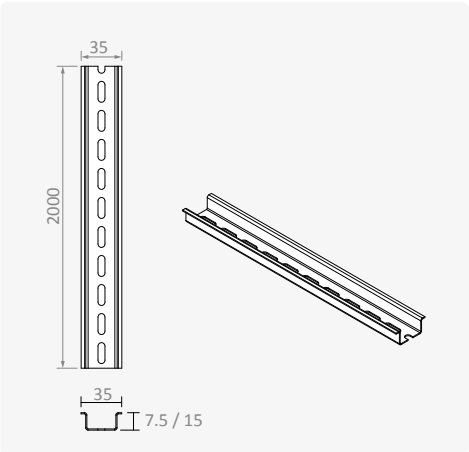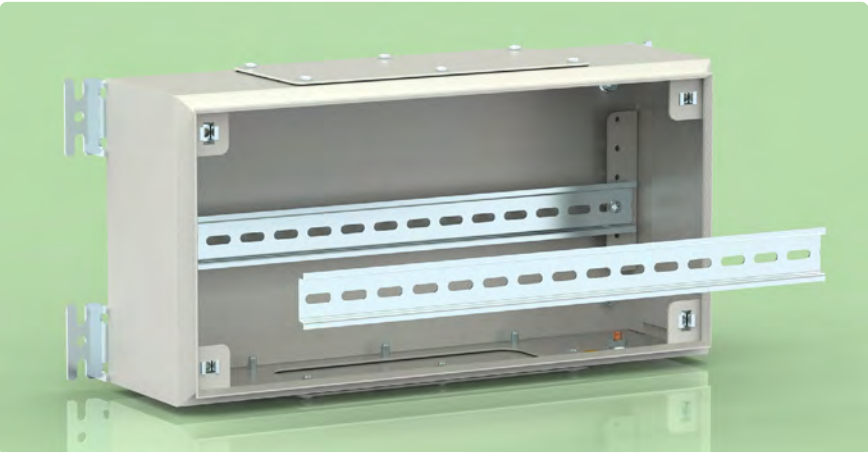


CABLE GLAND PLATE							
Reference	Width	Depth	External Dimensions		Useful Area		Weight
	A	C	X1	Z1	X2	Z2	
	mm	mm	mm	mm	mm	mm	kg
KB GP 30 12	300 / 400 / 600	120	220	94	188	64	0.25
Characteristics							Supply Includes
■ Material	DIN EN 10130 DC01 CCRS						■ One piece PE Conta
■ Surface Finishing	RAL7035w powder coating						■ Mounting fasteners
■ Thickness	1.5 mm						

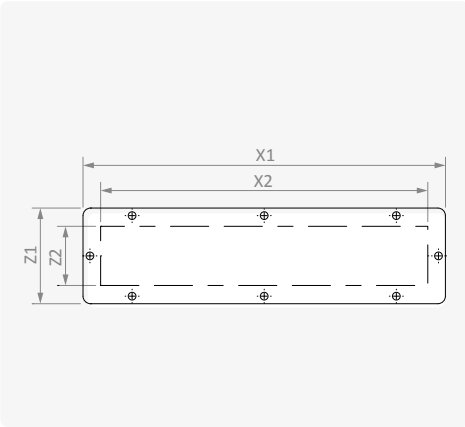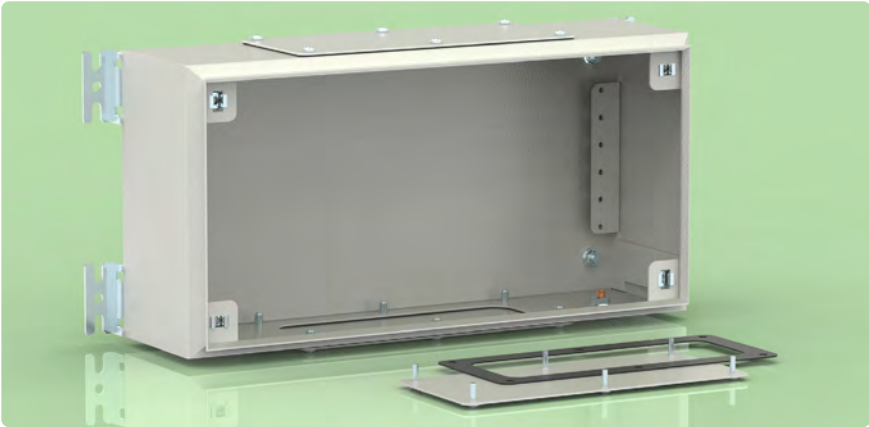


LID MOUNTING FASTENERS			WALL BRACKETS		
Reference	Packet pcs/package	Weight kg/package	Reference	Packet pcs/package	Weight kg/package
AK AK KB 062510	50	0.53	AK KL 0010	4	0.16
Supply Includes			Characteristics		
■ 50 pcs M6 x 20 Imbus screw			■ Material		
■ 50 pcs M6 plastic retaining washer			■ Surface Finishing		
■ 50 pcs M6 cage nut			■ Thickness		
			Supply Includes		
			■ Wall mounting screws		

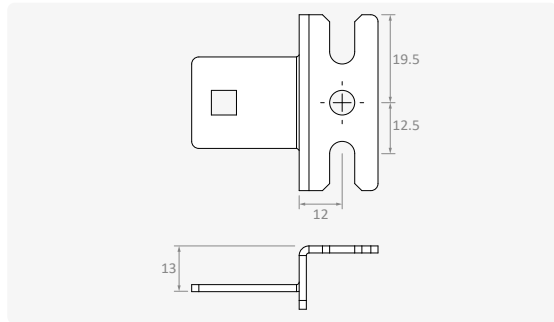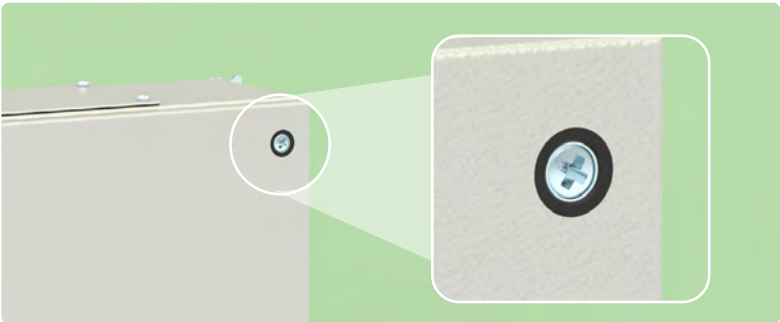

EARTHING CABLE						
Reference	Material	Cross-Section mm ²	Length mm	Connection	Packet pcs/package	Weight kg/package
KB OZ 061908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.16

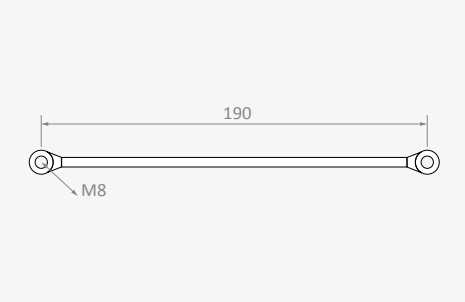



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

