



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)
■ Body : 1.2 / 1.5 mm
■ Door : 1.2 / 1.5 mm
Galvanized Steel (EN 10346 DX51D+Z)
■ Mounting plate : 1.5 mm

Surface Finishing

■ RAL7035w powder coating

Others

■ All welded construction
■ Solid + glazed door
■ Foamed-in door PU sealing gasket
■ 135° concealed hinges
■ 5mm Double-bit insert polyamide lock
■ Top and bottom brushed cable entry plates



On Request

■ Custom sizes
■ Custom colour
■ Pre-punching



Supply Includes




■ Body
■ Door
■ Incoming mounting plate
■ Distribution cover plate set
■ 4 pcs brushed cable entry plate
■ 4/6 pcs wall brackets

Complementary Accessories

■ DIN rail
■ Door inside mounting profile
■ Plastic cover plate
■ Special locks and keys
■ Earthing cable

Incoming Width	Distribution Width	Height	Depth	Reference	Door	Lock Type	Lock	Hinge	Wall Bracket	Incoming		Distribution		
										Mounting Plate		Cover Plate	Cover Capacity	Total Capacity
										↔	↕			
A1	A2	B	C							mm	mm	pcs	Module*	Module*
mm	mm	mm	mm		pcs	*	pcs	pcs	pcs					
400	600	600	200	KDS 04060620	1+1	C	2 + 2	2 + 2	4	350	530	3	29	87
		800	200	KDS 04060820	1+1	C	2 + 2	3 + 3	6	350	730	4	29	116
		1000	200	KDS 04061020	1+1	C	2 + 2	3 + 3	6	350	930	5	29	145
		1200	200	KDS 04061220	1+1	C	2 + 2	4 + 4	6	350	1130	6	29	174
	800	600	200	KDS 04080620	1+1	C	2 + 2	2 + 2	4	350	530	3	39	117
		800	200	KDS 04080820	1+1	C	2 + 2	3 + 3	6	350	730	4	39	156
		1000	200	KDS 04081020	1+1	C	2 + 2	3 + 3	6	350	930	5	39	195
		1200	200	KDS 04081220	1+1	C	2 + 2	4 + 4	6	350	1130	6	39	234
600	600	600	200	KDS 06060620	1+1	C	2 + 2	2 + 2	4	550	530	3	29	87
		800	200	KDS 06060820	1+1	C	2 + 2	3 + 3	6	550	730	4	29	116
		1000	200	KDS 06061020	1+1	C	2 + 2	3 + 3	6	550	930	5	29	145
		1200	200	KDS 06061220	1+1	C	2 + 2	4 + 4	6	550	1130	6	29	174
	800	600	200	KDS 06080620	1+1	C	2 + 2	2 + 2	4	550	530	3	39	117
		800	200	KDS 06080820	1+1	C	2 + 2	3 + 3	6	550	730	4	39	156
		1000	200	KDS 06081020	1+1	C	2 + 2	3 + 3	6	550	930	5	39	195
		1200	200	KDS 06081220	1+1	C	2 + 2	4 + 4	6	550	1130	6	39	234

* C: Quarter Turn

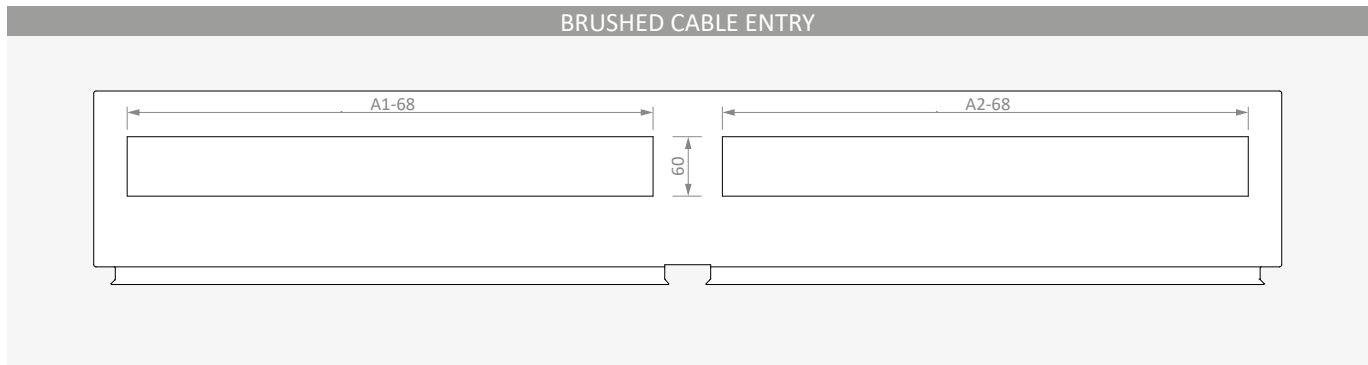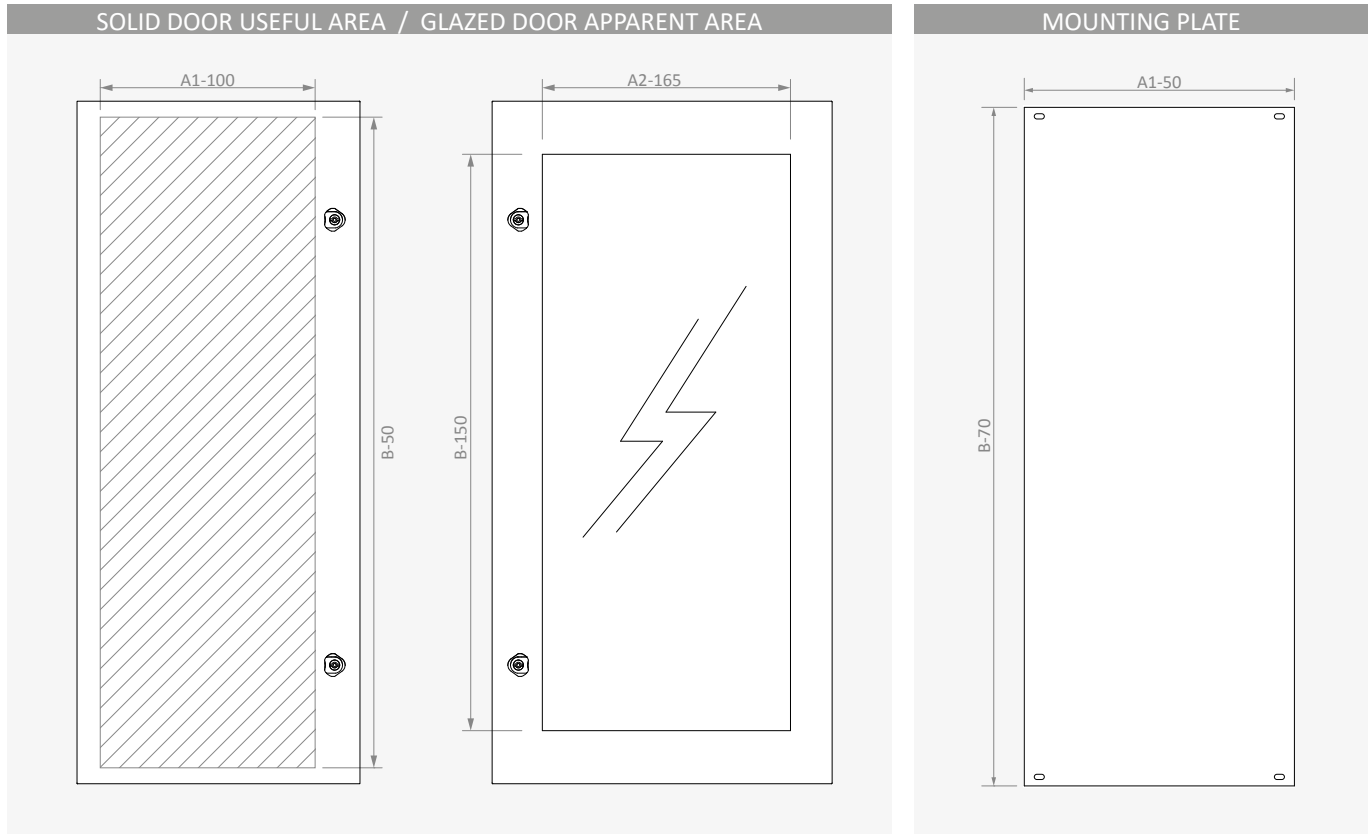
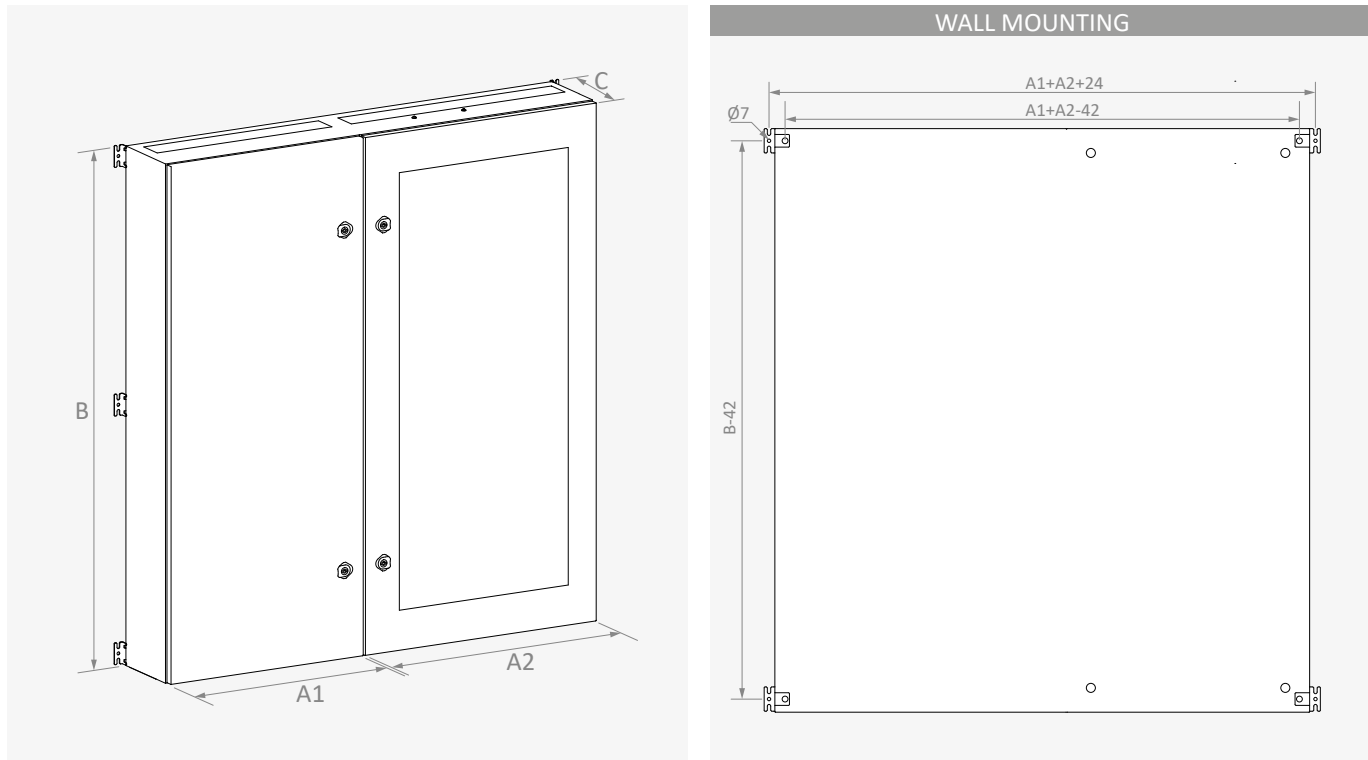


Incoming Width	Distribution Width	Height	Depth	Reference	Useful Area		Glazed Door		Brushed Cable Entry				Wall Mounting			
					Incoming Solid Door		Distribution Apparent Area		Incoming		Distribution		With Bracket		Internal	
					↔ mm	↕ mm	↔ mm	↕ mm	↔ mm	↗ mm	↔ mm	↗ mm	↔ mm	↗ mm	↔ mm	↗ mm
400	600	600	200	KDS 04060620	256	530	435	450	256	60	435	60	1024	558	958	558
		800	200	KDS 04060820	256	730	435	650	256	60	435	60	1024	758	958	758
		1000	200	KDS 04061020	256	930	435	850	256	60	435	60	1024	958	958	958
		1200	200	KDS 04061220	256	1130	435	1050	256	60	435	60	1024	1158	958	1158
	800	600	200	KDS 04080620	256	530	635	450	256	60	635	60	1224	558	1158	558
		800	200	KDS 04080820	256	730	635	650	256	60	635	60	1224	758	1158	758
		1000	200	KDS 04081020	256	930	635	850	256	60	635	60	1224	958	1158	958
		1200	200	KDS 04081220	256	1130	635	1050	256	60	635	60	1224	1158	1158	1158
600	600	600	200	KDS 06060620	456	530	435	450	456	60	435	60	1224	558	958	558
		800	200	KDS 06060820	456	730	435	650	456	60	435	60	1224	758	958	758
		1000	200	KDS 06061020	456	930	435	850	456	60	435	60	1224	958	958	958
		1200	200	KDS 06061220	456	1130	435	1050	456	60	435	60	1224	1158	958	1158
	800	600	200	KDS 06080620	456	530	635	450	456	60	635	60	1424	558	1158	558
		800	200	KDS 06080820	456	730	635	650	456	60	635	60	1424	758	1158	758
		1000	200	KDS 06081020	456	930	635	850	456	60	635	60	1424	958	1158	958
		1200	200	KDS 06081220	456	1130	635	1050	456	60	635	60	1424	1158	1158	1158

SOLID DOOR

Reference	Incoming Width	Outgoing Width	Height	Useful Area				Lock Type	Lock	Hinge	Weight
				Incoming Solid Door		Distribution Solid Door					
	A1 mm	A2 mm	B mm	W1 mm	H1 mm	W1 mm	H1 mm				
KDS KPG 0406	400	600	600	300	550	500	550	C	2	2	2.3
KDS KPG 0408			800	300	750	500	750	C	2	3	3
KDS KPG 0410			1000	300	950	500	950	C	2	4	3.8
KDS KPG 0412			1200	300	1150	500	1150	C	2	4	4.6
KDS KPG 0606	600	800	600	500	550	500	550	C	2	2	3.4
KDS KPG 0608			800	500	750	500	750	C	2	3	4.6
KDS KPG 0610			1000	500	950	500	950	C	2	4	5.7
KDS KPG 0612			1200	500	1150	500	1150	C	2	4	6.9


Characteristics			Supply Includes	
Material	DIN EN 10130 DC01 CCRS		Lock	
Surface Finishing	RAL7035w powder coating		Hinges	
Thickness	1.2 mm		* C: Quarter Turn	

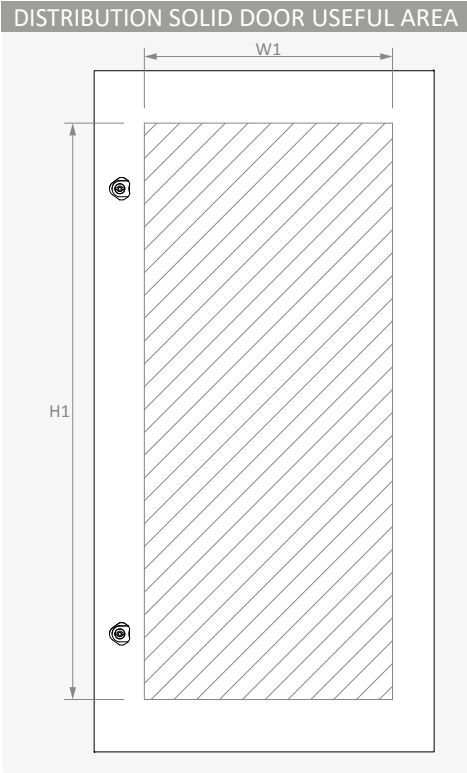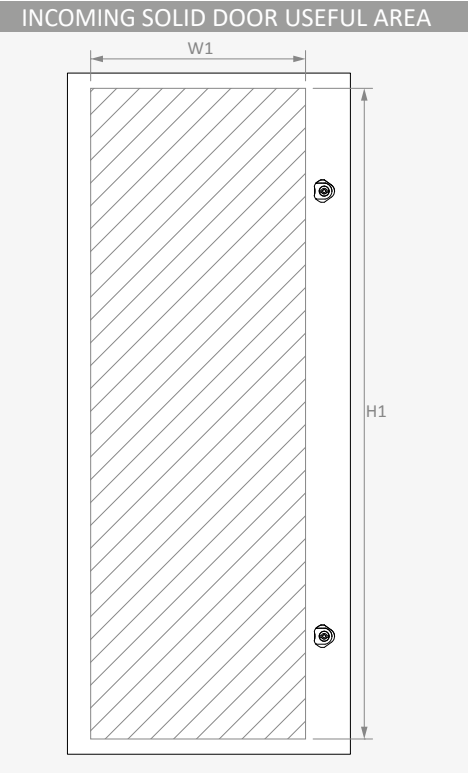

GLAZED DOOR

Reference	Distribution Width	Height	Apparent Area		Lock Type	Lock	Hinge	Weight
	A2	B	W6	H6				
	mm	mm	mm	mm				
KDS KPX 0606	600	600	435	450	C	2	2	3.6
KDS KPX 0608		800	435	650	C	2	3	4.8
KDS KPX 0610		1000	435	850	C	2	4	6.1
KDS KPX 0612		1200	435	1050	C	2	4	7.3
KDS KPX 0806	800	600	635	450	C	2	2	4.8
KDS KPX 0808		800	635	650	C	2	3	6.5
KDS KPX 0810		1000	635	850	C	2	4	8.1
KDS KPX 0812		1200	635	1050	C	2	4	9.7



Characteristics			Supply Includes	
Material	DIN EN 10130 DC01 CCRS / 4mm tempered glass		Lock	
Surface Finishing	RAL7035w powder coating		Hinges	
Thickness	1.2 mm		* C: Quarter Turn	

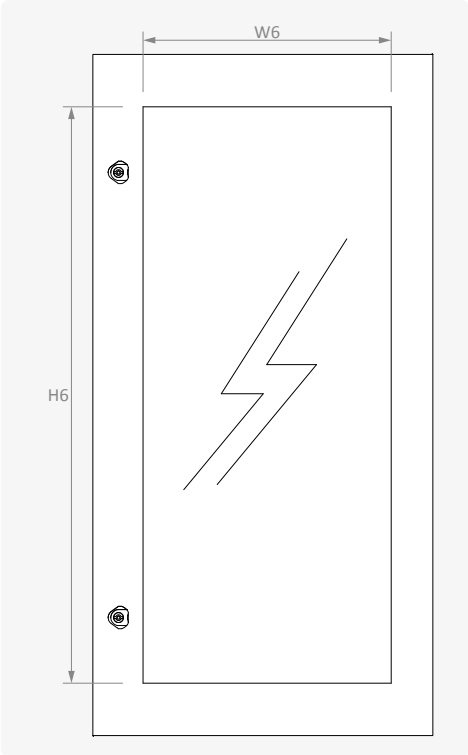

MOUNTING PLATE



Reference	Width		External Dimensions			Mounting Dimensions			Weight
	A1	B	X1	Y1	Z	X2	Y2	D	
	mm	mm	mm	mm	mm	mm	mm	mm	kg
ETS TS 0406	400	600	350	530	12	300	500	M8	3.1
ETS TS 0408	400	800	350	730	12	300	700	M8	4.1
ETS TS 0410	400	1000	350	930	12	300	900	M8	8.1
ETS TS 0412	400	1200	350	1130	12	300	1100	M8	9.2
ETS TS 0606	600	600	550	530	15	500	500	M8	5.0
ETS TS 0608	600	800	550	730	15	500	700	M8	6.9
ETS TS 0610	600	1000	550	930	15	500	900	M8	8.7
ETS TS 0611	600	1200	550	1130	15	500	1100	M8	10.2

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

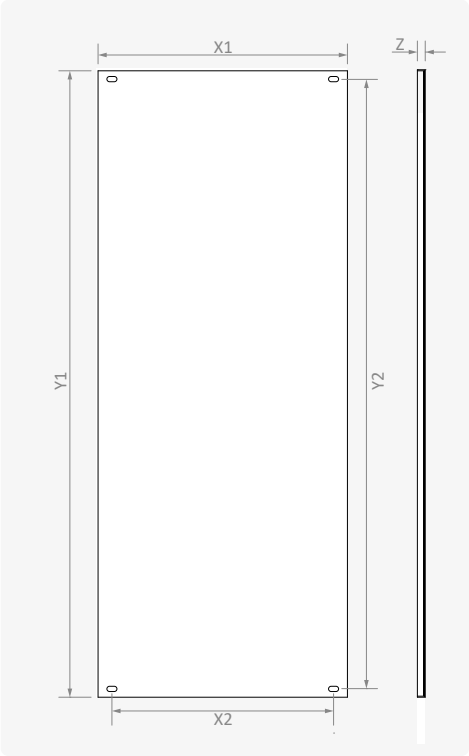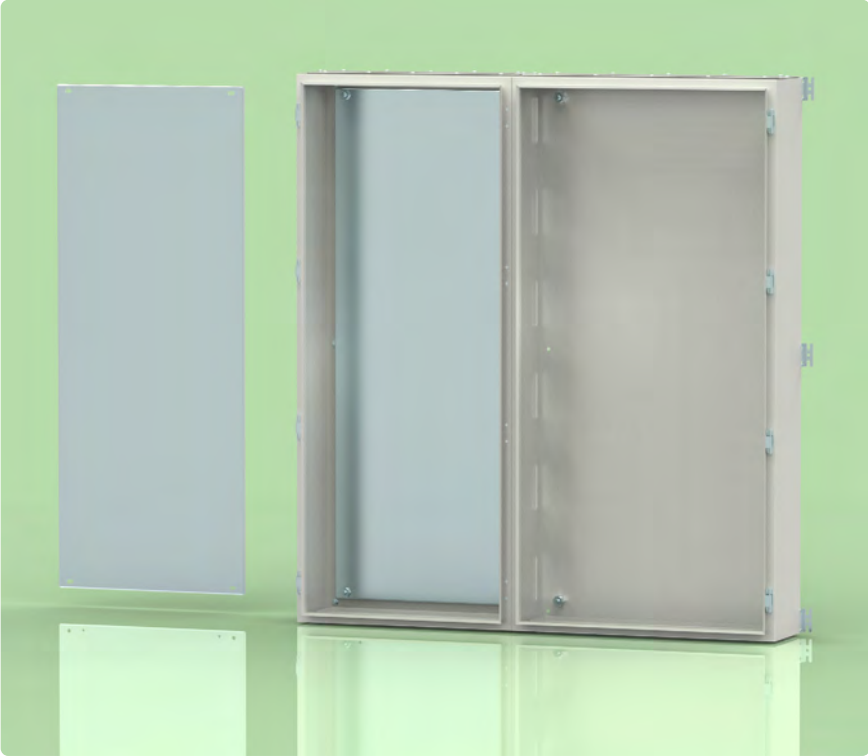

WALL BRACKETS

Reference	Packet	Weight	Characteristics		Supply Includes
	pcs/packet	kg/packet	Material	DIN EN 10130 DC01 CCRS	
AK KL 0010	4	0.16	Surface Finishing	Zinc coated Cr ⁺³ passivation	Wall mounting screws
AK KL 0011	6	0.25	Thickness	2 mm	

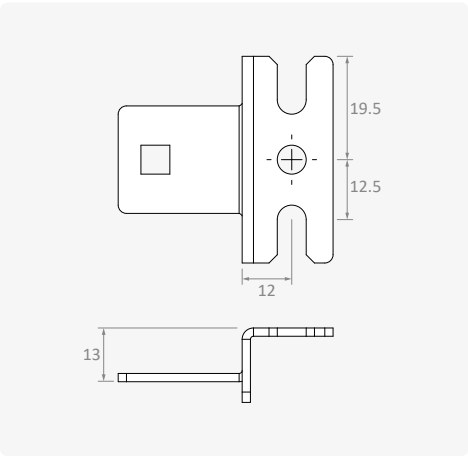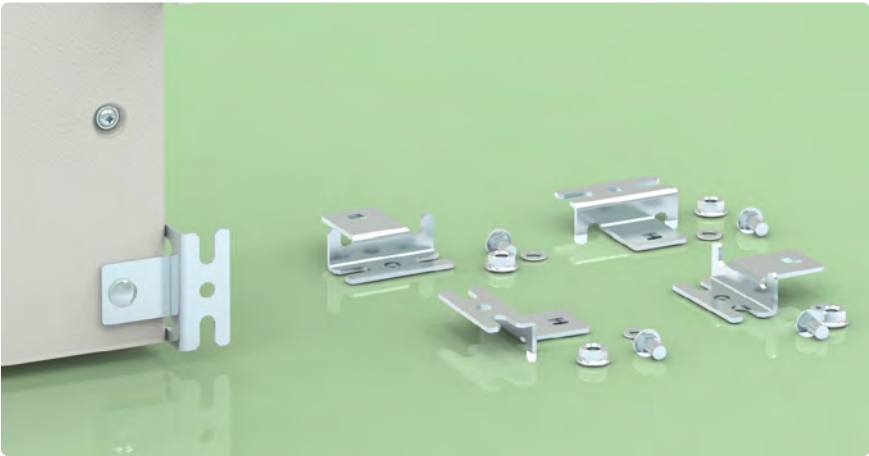


LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
		Casing	Cam	Key Type	
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn; I: Escutcheon
** Keys should be ordered separately.





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

