



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)

- Body : 1.5 mm
- Door : 2 mm
- Plinth : 2 mm

Galvanized Steel (EN 10346 DX51D+Z)

- Mounting plate : 2 mm

Surface Finishing

- RAL7035w powder coating

IP Rating

- IP65 (TS 3033, EN 60529)

Others

- All welded monobloc body
- Foamed-in door PU sealing gasket
- Swing-handle polyamide lock (3 points locking, 333 key)
- Concealed hinge
- Multiple mounting plate possibility
- Plinth and cover options

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Glazed door



Supply Includes

- Body
- Door (Select ≈ K)
- Rear panel (Select ≈ K)
- Mounting plate (Option ≈ M)
- Plinth (Option ≈ P)


Complementary Accessories

- Rain canopy
- Door inside mounting profile
- Partial mounting plate
- Carriage depth slide and support
- Separating profile
- L, U and Z profiles
- L and Z brackets
- Plan pocket
- Earthing cable
- 4/6 pcs side rails
- 4 pcs Z profiles


Width	Height	Depth	Reference	Door	Hinge
A	B	C			
mm	mm	mm		pcs	pcs
400	600	400	MS xxx 040640	1	2
		500	MS xxx 040650	1	2
		600	MS xxx 040660	1	2
	800	400	MS xxx 040840	1	2
		500	MS xxx 040850	1	2
		600	MS xxx 040860	1	2
	1000	400	MS xxx 041040	1	2
		500	MS xxx 041050	1	2
		600	MS xxx 041060	1	2
	1200	400	MS xxx 041240	1	2
		500	MS xxx 041250	1	2
		600	MS xxx 041260	1	2
	1400	400	MS xxx 041440	1	3
		500	MS xxx 041450	1	3
		600	MS xxx 041460	1	3
	1600	400	MS xxx 041640	1	3
		500	MS xxx 041650	1	3
		600	MS xxx 041660	1	3
	1800	400	MS xxx 041840	1	3
		500	MS xxx 041850	1	3
		600	MS xxx 041860	1	3
	2000	400	MS xxx 041880	1	3
		500	MS xxx 042040	1	3
		600	MS xxx 042050	1	3
600	600	400	MS xxx 060640	1	2
		500	MS xxx 060650	1	2
		600	MS xxx 060660	1	2
	800	400	MS xxx 060840	1	2
		500	MS xxx 060850	1	2
		600	MS xxx 060860	1	2
	1000	400	MS xxx 061040	1	2
		500	MS xxx 061050	1	2
		600	MS xxx 061060	1	2
	1200	400	MS xxx 061240	1	2
		500	MS xxx 061250	1	2
		600	MS xxx 061260	1	2
	1400	400	MS xxx 061440	1	3
		500	MS xxx 061450	1	3
		600	MS xxx 061460	1	3
	1600	400	MS xxx 061640	1	3
		500	MS xxx 061650	1	3
		600	MS xxx 061660	1	3
	1800	400	MS xxx 061840	1	3
		500	MS xxx 061850	1	3
		600	MS xxx 061860	1	3
	2000	400	MS xxx 061880	1	3
		500	MS xxx 062040	1	3
		600	MS xxx 062050	1	3
800	600	400	MS xxx 080640	1	2
		500	MS xxx 080650	1	2
		600	MS xxx 080660	1	2
	800	400	MS xxx 080840	1	2
		500	MS xxx 080850	1	2
		600	MS xxx 080860	1	2
	1000	400	MS xxx 081040	1	2
		500	MS xxx 081050	1	2
		600	MS xxx 081060	1	2
	1200	400	MS xxx 081240	1	2
		500	MS xxx 081250	1	2
		600	MS xxx 081260	1	2
	1400	400	MS xxx 081440	1	3
		500	MS xxx 081450	1	3
		600	MS xxx 081460	1	3
	1600	400	MS xxx 081640	1	3
		500	MS xxx 081650	1	3
		600	MS xxx 081660	1	3
	1800	400	MS xxx 081840	1	3
		500	MS xxx 081850	1	3
		600	MS xxx 081860	1	3
	2000	400	MS xxx 081880	1	3
		500	MS xxx 082040	1	3
		600	MS xxx 082050	1	3
1000	600	400	MS xxx 100640	1	2
		500	MS xxx 100650	1	2
		600	MS xxx 100660	1	2
	800	400	MS xxx 100840	1	2
		500	MS xxx 100850	1	2
		600	MS xxx 100860	1	2
	1000	400	MS xxx 101040	1	2
		500	MS xxx 101050	1	2
		600	MS xxx 101060	1	2
	1200	400	MS xxx 101240	1	2
		500	MS xxx 101250	1	2
		600	MS xxx 101260	1	2
	1400	400	MS xxx 101440	1	3
		500	MS xxx 101450	1	3
		600	MS xxx 101460	1	3
	1600	400	MS xxx 101640	1	3
		500	MS xxx 101650	1	3
		600	MS xxx 101660	1	3
	1800	400	MS xxx 101840	1	3
		500	MS xxx 101850	1	3
		600	MS xxx 101860	1	3
	2000	400	MS xxx 101880	1	3
		500	MS xxx 102040	1	3
		600	MS xxx 102050	1	3
1200	600	400	MS xxx 120640	1	2
		500	MS xxx 120650	1	2
		600	MS xxx 120660	1	2
	800	400	MS xxx 120840	1	2
		500	MS xxx 120850	1	2
		600	MS xxx 120860	1	2
	1000	400	MS xxx 121040	1	2
		500	MS xxx 121050	1	2
		600	MS xxx 121060	1	2
	1200	400	MS xxx 121240	1	2
		500	MS xxx 121250	1	2
		600	MS xxx 121260	1	2
	1400	400	MS xxx 121440	1	3
		500	MS xxx 121450	1	3
		600	MS xxx 121460	1	3
	1600	400	MS xxx 121640	1	3
		500	MS xxx 121650	1	3
		600	MS xxx 121660	1	3
	1800	400	MS xxx 121840	1	3
		500	MS xxx 121850	1	3
		600	MS xxx 121860	1	3
	2000	400	MS xxx 121880	1	3
		500	MS xxx 122040	1	3
		600	MS xxx 122050	1	3
1400	600	400	MS xxx 140640	1	2
		500	MS xxx 140650	1	2
		600	MS xxx 140660	1	2
	800	400	MS xxx 140840	1	2
		500	MS xxx 140850	1	2
		600	MS xxx 140860	1	2
	1000	400	MS xxx 141040	1	2
		500	MS xxx 141050	1	2
		600	MS xxx 141060	1	2
	1200	400	MS xxx 141240	1	2
		500	MS xxx 141250	1	2
		600	MS xxx 141260	1	2
	1400	400	MS xxx 141440	1	3
		500	MS xxx 141450	1	3
		600	MS xxx 141460	1	3
	1600	400	MS xxx 141640	1	3
		500	MS xxx 141650	1	3
		600	MS xxx 141660	1	3
	1800	400	MS xxx 141840	1	3
		500	MS xxx 141850	1	3
		600	MS xxx 141860	1	3
	2000	400	MS xxx 141880	1	3
		500	MS xxx 142040	1	3
		600	MS xxx 142050	1	3

Width	Height	Depth	Reference	Door	Hinge
A	B	C			
mm	mm	mm		pcs	pcs
800	600	400	MS xxx 080640	1	2
		500	MS xxx 080650	1	2
		600	MS xxx 080660	1	2
	800	400	MS xxx 080840	1	2
		500	MS xxx 080850	1	2
		600	MS xxx 080860	1	2
	1000	400	MS xxx 081040	1	2
		500	MS xxx 081050	1	2
		600	MS xxx 081060	1	2
	1200	400	MS xxx 081240	1	2
		500	MS xxx 081250	1	2
		600	MS xxx 081260	1	2
	1400	400	MS xxx 081440	1	3
		500	MS xxx 081450	1	3
		600	MS xxx 081460	1	3
	1600	400	MS xxx 081640	1	3
		500	MS xxx 081650	1	3
		600	MS xxx 081660	1	3
	1800	400	MS xxx 081840	1	3
		500	MS xxx 081850	1	3
		600	MS xxx 081860	1	3
	2000	400	MS xxx 081880	1	3
		500	MS xxx 082040	1	3
		600	MS xxx 082050	1	3
1000	600	400	MS xxx 100640	1	2
		500	MS xxx 100650	1	2
		600	MS xxx 100660	1	2
	800	400	MS xxx 100840	1	2
		500	MS xxx 100850	1	2
		600	MS xxx 100860	1	2
	1000	400	MS xxx 101040	1	2
		500	MS xxx 101050	1	2
		600	MS xxx 101060	1	2
	1200	400	MS xxx 101240	1	2
		500	MS xxx 101250	1	2
		600	MS xxx 101260	1	2
	1400	400	MS xxx 101440	1	3
		500	MS xxx 101450	1	3
		600	MS xxx 101460	1	3
	1600	400	MS xxx 101640	1	3
		500	MS xxx 101650	1	3
		600	MS xxx 101660	1	3
	1800	400	MS xxx 101840	1	3
		500	MS xxx 101850	1	3

Width A mm	Height B mm	Reference	Solid Door	Useful Area		Mounting Plate	Dimensions	
				↔ mm	↕ mm		↔ mm	↕ mm
400	600	AS xxx 0406**	AS KP0406	220	420	AS TS0406	302	502
	800	AS xxx 0408**	AS KP0408	220	620	AS TS0408	302	702
	1000	AS xxx 0410**	AS KP0410	220	820	AS TS0410	302	902
	1200	AS xxx 0412**	AS KP0412	220	1020	AS TS0412	302	1102
	1400	AS xxx 0414**	AS KP0414	220	1220	AS TS0414	302	1302
	1600	AS xxx 0416**	AS KP0416	220	1420	AS TS0416	302	1502
	1800	AS xxx 0418**	AS KP0418	220	1620	AS TS0418	302	1702
	2000	AS xxx 0420**	AS KP0420	220	1820	AS TS0420	302	1902
600	600	AS xxx 0606**	AS KP0606	420	420	AS TS0606	502	502
	800	AS xxx 0608**	AS KP0608	420	620	AS TS0608	502	702
	1000	AS xxx 0610**	AS KP0610	420	820	AS TS0610	502	902
	1200	AS xxx 0612**	AS KP0612	420	1020	AS TS0612	502	1102
	1400	AS xxx 0614**	AS KP0614	420	1220	AS TS0614	502	1302
	1600	AS xxx 0616**	AS KP0616	420	1420	AS TS0616	502	1502
	1800	AS xxx 0618**	AS KP0618	420	1620	AS TS0618	502	1702
	2000	AS xxx 0620**	AS KP0620	420	1820	AS TS0620	502	1902
800	600	AS xxx 0806**	AS KP0806	620	420	AS TS0806	702	502
	800	AS xxx 0808**	AS KP0808	620	620	AS TS0808	702	702
	1000	AS xxx 0810**	AS KP0810	620	820	AS TS0810	702	902
	1200	AS xxx 0812**	AS KP0812	620	1020	AS TS0812	702	1102
	1400	AS xxx 0814**	AS KP0814	620	1220	AS TS0814	702	1302
	1600	AS xxx 0816**	AS KP0816	620	1420	AS TS0816	702	1502
	1800	AS xxx 0818**	AS KP0818	620	1620	AS TS0818	702	1702
	2000	AS xxx 0820**	AS KP0820	620	1820	AS TS0820	702	1902
1000	1800	AS xxx 1018**	AS KP1018	320 + 320	1620	AS TS1018	902	1702
	2000	AS xxx 1020**	AS KP1020	320 + 320	1820	AS TS1020	902	1902
1200	1800	AS xxx 1218**	AS KP1218	420 + 420	1620	AS TS1218	1102	1702
	2000	AS xxx 1220**	AS KP1220	420 + 420	1820	AS TS1220	1102	1902
1400	1800	AS xxx 1418**	AS KP1418	520 + 520	1620	AS TS1418	1302	1702
	2000	AS xxx 1420**	AS KP1420	520 + 520	1820	AS TS1420	1302	1902

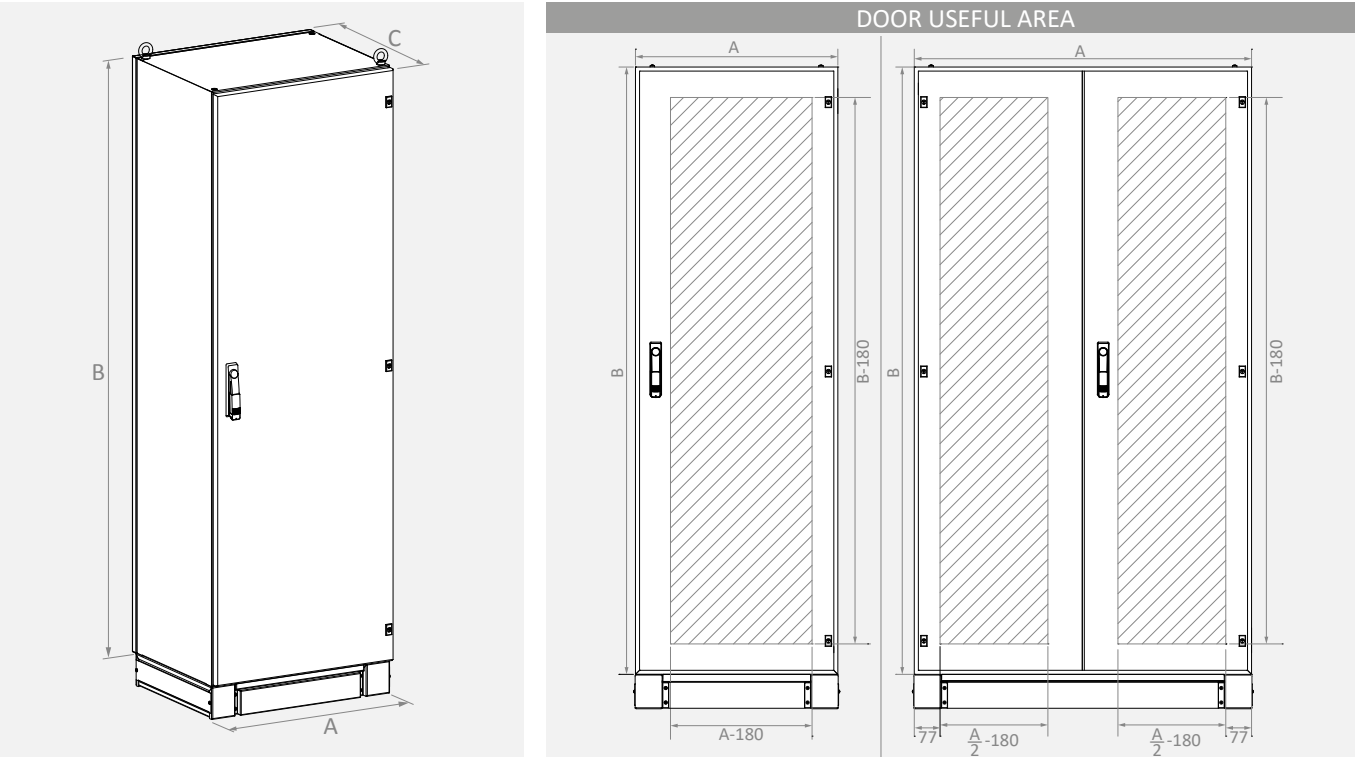

Width A mm	Depth C mm	Reference	Bottom Cover Plate	Dimensions	
				↔ mm	↗ mm
400	400	AS xxx 04**40	AS BS0440	394	340
	500	AS xxx 04**50	AS BS0450	394	440
	600	AS xxx 04**60	AS BS0460	394	540
	800	AS xxx 04**80	AS BS0480	394	740
600	400	AS xxx 06**40	AS BS0640	594	340
	500	AS xxx 06**50	AS BS0650	594	440
	600	AS xxx 06**60	AS BS0660	594	540
	800	AS xxx 06**80	AS BS0680	594	740
800	400	AS xxx 08**40	AS BS0840	794	340
	500	AS xxx 08**50	AS BS0850	794	440
	600	AS xxx 08**60	AS BS0860	794	540
	800	AS xxx 08**80	AS BS0880	794	740
1000	400	AS xxx 10**40	AS BS1040	994	340
	500	AS xxx 10**50	AS BS1050	994	440
	600	AS xxx 10**60	AS BS1060	994	540
	800	AS xxx 10**80	AS BS1080	994	740
1200	400	AS xxx 12**40	AS BS1240	1194	340
	500	AS xxx 12**50	AS BS1250	1194	440
	600	AS xxx 12**60	AS BS1260	1194	540
	800	AS xxx 12**80	AS BS1280	1194	740
1400	400	AS xxx 14**40	AS BS1440	1394	340
	500	AS xxx 14**50	AS BS1450	1394	440
	600	AS xxx 14**60	AS BS1460	1394	540
	800	AS xxx 14**80	AS BS1480	1394	740

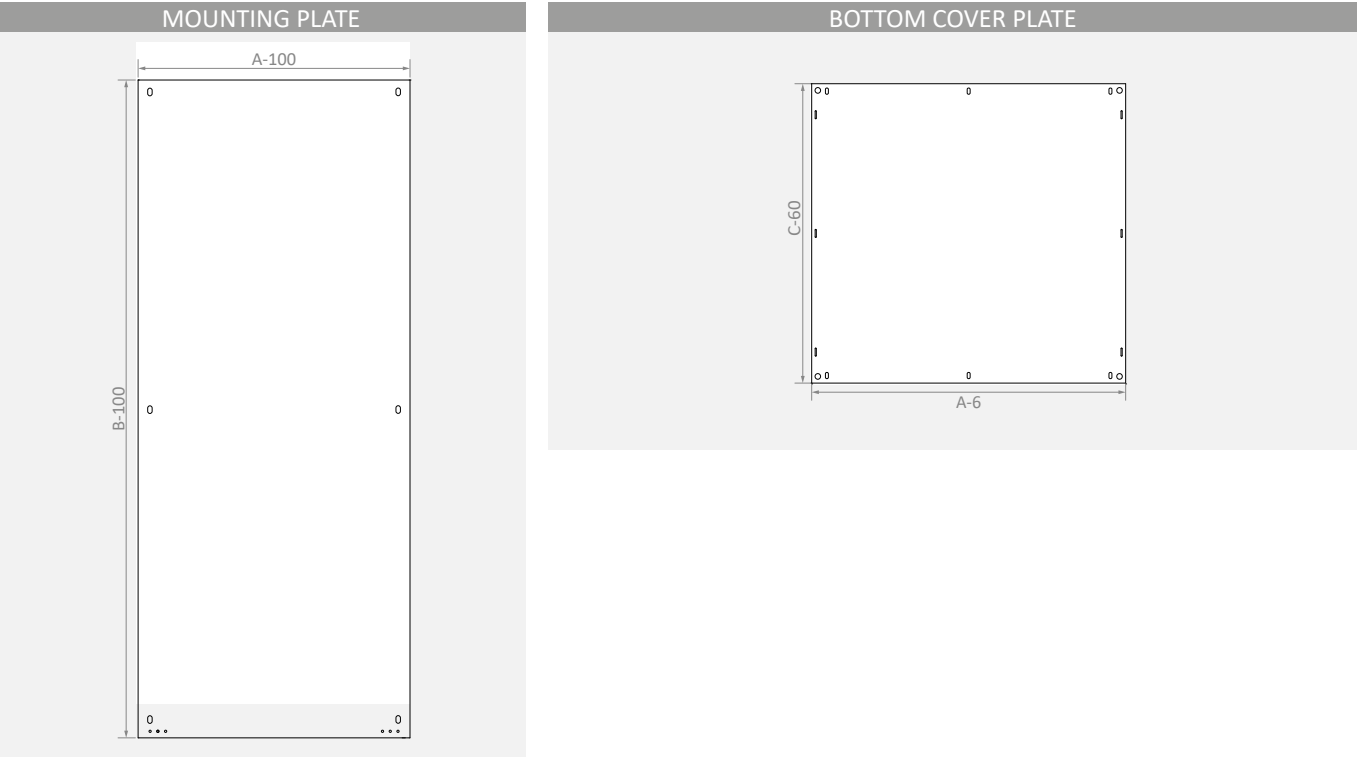

SOLID DOOR												
Reference	Width	Height	Wide	Length	Useful Area				Door	Lock Type	Hinge	Weight
	A	B	X1	Y1	W1	W11*	W12*	H1	pcs	*	pcs	kg
	mm	mm	mm	mm	mm	mm	mm	mm				
AS KP 0406	400	600	391	588	220	-	-	420	1	I	2	4.3
AS KP 0408	400	800	391	788	220	-	-	620	1	I	2	5.6
AS KP 0410	400	1000	391	988	220	-	-	820	1	I	2	7
AS KP 0412	400	1200	391	1188	220	-	-	1020	1	I	2	8.4
AS KP 0414	400	1400	391	1388	220	-	-	1220	1	I	3	9.7
AS KP 0416	400	1600	391	1588	220	-	-	1420	1	I	3	11.1
AS KP 0418	400	1800	391	1788	220	-	-	1620	1	I	3	12.4
AS KP 0420	400	2000	391	1988	220	-	-	1820	1	I	3	13.8
AS KP 0606	600	600	591	588	420	-	-	420	1	I	2	6.3
AS KP 0608	600	800	591	788	420	-	-	620	1	I	2	8.3
AS KP 0610	600	1000	591	988	420	-	-	820	1	I	2	10.3
AS KP 0612	600	1200	591	1188	420	-	-	1020	1	I	2	12.3
AS KP 0614	600	1400	591	1388	420	-	-	1220	1	I	3	14.3
AS KP 0616	600	1600	591	1588	420	-	-	1420	1	I	3	16.3
AS KP 0618	600	1800	591	1788	420	-	-	1620	1	I	3	18.3
AS KP 0620	600	2000	591	1988	420	-	-	1820	1	I	3	20.3
AS KP 0806	800	600	791	588	620	-	-	420	1	I	2	8.3
AS KP 0808	800	800	791	788	620	-	-	620	1	I	2	10.9
AS KP 0810	800	1000	791	988	620	-	-	820	1	I	2	13.6
AS KP 0812	800	1200	791	1188	620	-	-	1020	1	I	2	16.2
AS KP 0814	800	1400	791	1388	620	-	-	1220	1	I	3	18.8
AS KP 0816	800	1600	791	1588	620	-	-	1420	1	I	3	21.5
AS KP 0818	800	1800	791	1788	620	-	-	1620	1	I	3	24.1
AS KP 0820	800	2000	791	1988	620	-	-	1820	1	I	3	26.8
AS KP 1018	1000	1800	991	1788	-	320	320	1620	2	I	3+3	31.7
AS KP 1020	1000	2000	991	1988	-	320	320	1820	2	I	3+3	35.2
AS KP 1218	1200	1800	1191	1788	-	420	420	1620	2	I	3+3	37.5
AS KP 1220	1200	2000	1191	1988	-	420	420	1820	2	I	3+3	41.7
AS KP 1418	1400	1800	1391	1788	-	520	520	1620	2	I	3+4	43.4
AS KP 1420	1400	2000	1391	1988	-	520	520	1820	2	I	3+5	48.1
Characteristics								Supply Includes				
■ Material		DIN EN 10130 DC01 CCRS						■ Lock				
■ Surface Finishing		RAL7035w powder coating						■ Hinges				
■ Thickness		2 mm						* I: Escutcheon Rod-latch				



REAR PANEL							
Reference	Width	Height	Wide	Length	Useful Area		Weight
	A	B	X1	Y1	W1	H1	
	mm	mm	mm	mm	mm	mm	kg
MS ST 0406	400	600	399	599	310	510	4.1
MS ST 0408	400	800	399	799	310	710	5.2
MS ST 0410	400	1000	399	999	310	910	6.4
MS ST 0412	400	1200	399	1199	310	1110	7.6
MS ST 0414	400	1400	399	1399	310	1310	8.8
MS ST 0416	400	1600	399	1599	310	1510	9.9
MS ST 0418	400	1800	399	1799	310	1710	11.1
MS ST 0420	400	2000	399	1999	310	1910	12.3
MS ST 0606	600	600	599	599	510	510	5.7
MS ST 0608	600	800	599	799	510	710	7.4
MS ST 0610	600	1000	599	999	510	910	9.0
MS ST 0612	600	1200	599	1199	510	1110	10.7
MS ST 0614	600	1400	599	1399	510	1310	12.3
MS ST 0616	600	1600	599	1599	510	1510	14.0
MS ST 0618	600	1800	599	1799	510	1710	15.6
MS ST 0620	600	2000	599	1999	510	1910	17.3
MS ST 0806	800	600	799	599	710	510	7.4
MS ST 0808	800	800	799	799	710	810	9.5
MS ST 0810	800	1000	799	999	710	910	11.6
MS ST 0812	800	1200	799	1199	710	1110	13.8
MS ST 0814	800	1400	799	1399	710	1410	15.9
MS ST 0816	800	1600	799	1599	710	1510	18.0
MS ST 0818	800	1800	799	1799	710	1710	20.2
MS ST 0820	800	2000	799	1999	710	1910	22.3
MS ST 1018	1000	1800	999	1799	910	1710	24.7
MS ST 1020	1000	2000	999	1999	910	1910	27.3
MS ST 1218	1200	1800	1199	1799	1110	1710	29.3
MS ST 1220	1200	2000	1199	1999	1110	1910	32.4
MS ST 1418	1400	1800	1399	1799	1310	1710	33.8
MS ST 1420	1400	2000	1399	1999	1310	1910	37.4
Characteristics					Supply Includes		
■ Material	DIN EN 10130 DC01 CCRS				■ Rear panel fasteners		
■ Surface Finishing	RAL7035w powder coating						
■ Thickness	1.5 mm						




PLINTH

Reference	Width	Depth	Wide	Length	Height	Connection			Weight kg
	A	C	X1	Z1	Y1	X2	Z2	Z21	
	mm	mm	mm	mm	mm	mm	mm	mm	
AS Bx000404 1	400	400	400	345	100	320	240	-	6.6
AS Bx000405 1	400	500	400	445	100	320	340	-	8.0
AS Bx000406 1	400	600	400	545	100	320	440	220	9.2
AS Bx000408 1	400	800	400	745	100	320	640	320	11.9
AS Bx000604 1	600	400	600	345	100	520	240	-	8.5
AS Bx000605 1	600	500	600	445	100	520	340	-	10.2
AS Bx000606 1	600	600	600	545	100	520	440	220	11.6
AS Bx000608 1	600	800	600	745	100	520	640	320	14.8
AS Bx000804 1	800	400	800	345	100	720	240	-	10.0
AS Bx000805 1	800	500	800	445	100	720	340	-	11.9
AS Bx000806 1	800	600	800	545	100	720	440	220	13.6
AS Bx000808 1	800	800	800	745	100	720	640	320	17.2
AS Bx001004 1	1000	400	1000	345	100	920	240	-	11.8
AS Bx001005 1	1000	500	1000	445	100	920	340	-	14.0
AS Bx001006 1	1000	600	1000	545	100	920	440	220	15.8
AS Bx001008 1	1000	800	1000	745	100	920	640	320	19.9
AS Bx001204 1	1200	400	1200	345	100	1120	240	-	13.5
AS Bx001205 1	1200	500	1200	445	100	1120	340	-	16.1
AS Bx001206 1	1200	600	1200	545	100	1120	440	220	18.1
AS Bx001208 1	1200	800	1200	745	100	1120	640	320	22.7
AS Bx001404 1	1400	400	600+800	345	100	520+720	240	-	18.5
AS Bx001405 1	1400	500	600+800	445	100	520+720	340	-	22.1
AS Bx001406 1	1400	600	600+800	545	100	520+720	440	220	25.2
AS Bx001408 1	1400	800	600+800	745	100	520+720	640	320	32.0
AS Bx000404 2	400	400	400	345	200	320	240	-	8.6
AS Bx000405 2	400	500	400	445	200	320	340	-	10.2
AS Bx000406 2	400	600	400	545	200	320	440	220	11.6
AS Bx000408 2	400	800	400	745	200	320	640	320	14.6
AS Bx000604 2	600	400	600	345	200	520	240	-	11.0
AS Bx000605 2	600	500	600	445	200	520	340	-	12.9
AS Bx000606 2	600	600	600	545	200	520	440	220	14.5
AS Bx000608 2	600	800	600	745	200	520	640	320	18.0
AS Bx000804 2	800	400	800	345	200	720	240	-	13.0
AS Bx000805 2	800	500	800	445	200	720	340	-	15.1
AS Bx000806 2	800	600	800	545	200	720	440	220	16.9
AS Bx000808 2	800	800	800	745	200	720	640	320	20.9
AS Bx001004 2	1000	400	1000	345	200	920	240	-	15.2
AS Bx001005 2	1000	500	1000	445	200	920	340	-	17.7
AS Bx001006 2	1000	600	1000	545	200	920	440	220	19.7
AS Bx001008 2	1000	800	1000	745	200	920	640	320	24.1
AS Bx001204 2	1200	400	1200	345	200	1120	240	-	17.5
AS Bx001205 2	1200	500	1200	445	200	1120	340	-	20.2
AS Bx001206 2	1200	600	1200	545	200	1120	440	220	22.4
AS Bx001208 2	1200	800	1200	745	200	1120	640	320	27.3
AS Bx001404 2	1400	400	600+800	345	200	520+720	240	-	18.5
AS Bx001405 2	1400	500	600+800	445	200	520+720	340	-	22.1
AS Bx001406 2	1400	600	600+800	545	200	520+720	440	220	25.2
AS Bx001408 2	1400	800	600+800	745	200	520+720	640	320	32.0

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm

Supply Includes	
■ Cover plates and mounting screws	
■ Plinth mounting fasteners	

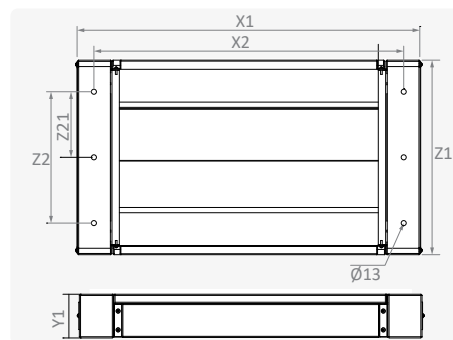


BOTTOM COVER PLATE

Reference	Width	Depth	Wide	Length	Weight kg
	A	C	X	Y	
	mm	mm	mm	mm	
AS BS 0440	400	400	394	340	2.1
AS BS 0450	400	500	394	440	2.8
AS BS 0460	400	600	394	540	3.4
AS BS 0480	400	800	394	740	4.7
AS BS 0640	600	400	594	340	3.2
AS BS 0650	600	500	594	440	4.2
AS BS 0660	600	600	594	540	5.1
AS BS 0680	600	800	594	740	7.0
AS BS 0840	800	400	794	340	4.3
AS BS 0850	800	500	794	440	5.6
AS BS 0860	800	600	794	540	6.9
AS BS 0880	800	800	794	740	9.4
AS BS 1040	1000	400	994	340	5.4
AS BS 1050	1000	500	994	440	7.0
AS BS 1060	1000	600	994	540	8.6
AS BS 1080	1000	800	994	740	11.8
AS BS 1240	1200	400	1194	340	6.5
AS BS 1250	1200	500	1194	440	8.4
AS BS 1260	1200	600	1194	540	10.3
AS BS 1280	1200	800	1194	740	14.1
AS BS 1440	1400	400	1394	340	7.6
AS BS 1450	1400	500	1394	440	9.8
AS BS 1460	1400	600	1394	540	12.0
AS BS 1480	1400	800	1394	740	16.5

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm

Supply Includes	
■ Bottom cover plates fasteners	

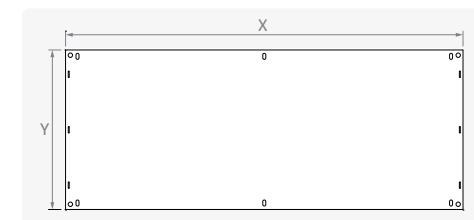


RAIN CANOPY

Reference	Width	Depth	Wide	Length	Connection		Weight kg
	A	C	X1	Z1	X2	Z2	
	mm	mm	mm	mm	mm	mm	
AS SP 04 40	400	400	450	440	366	307	3.8
AS SP 04 50	400	500	450	540	366	407	4.6
AS SP 04 60	400	600	450	640	366	507	5.3
AS SP 04 80	400	800	450	840	366	707	6.7
AS SP 06 40	600	400	650	440	566	307	4.8
AS SP 06 50	600	500	650	540	566	407	5.8
AS SP 06 60	600	600	650	640	566	507	6.7
AS SP 06 80	600	800	650	840	566	707	8.5
AS SP 08 40	800	400	850	440	766	307	5.9
AS SP 08 50	800	500	850	540	766	407	6.9
AS SP 08 60	800	600	850	640	766	507	8.0
AS SP 08 80	800	800	850	840	766	707	10.2
AS SP 10 40	1000	400	1050	440	966	307	6.9
AS SP 10 50	1000	500	1050	540	966	407	8.1
AS SP 10 60	1000	600	1050	640	966	507	9.4
AS SP 10 80	1000	800	1050	840	966	707	12.0
AS SP 12 40	1200	400	1250	440	1166	307	7.9
AS SP 12 50	1200	500	1250	540	1166	407	9.3
AS SP 12 60	1200	600	1250	640	1166	507	10.8
AS SP 12 80	1200	800	1250	840	1166	707	13.8
AS SP 14 40	1400	400	1450	440	1366	307	8.9
AS SP 14 50	1400	500	1450	540	1366	407	10.5
AS SP 14 60	1400	600	1450	640	1366	507	12.2
AS SP 14 80	1400	800	1450	840	1366	707	15.5

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	1.2 mm

Supply Includes	
■ Mounting screws	

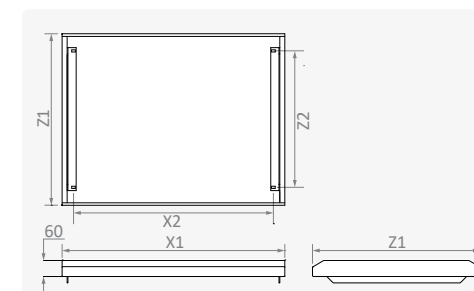

MOUNTING PLATE


Reference	Width		Height		Wide		Length		Connection				Connection n pcs	Weight kg
	A	B			X1		Y1		X2	Y2	X3	Y3		
	mm	mm			mm		mm		mm	mm	mm	mm		
AS TS 0406	400	600			300		500		241	400	260	-	4	3.3
AS TS 0408	400	800			300		700		241	600	260	-	4	4.5
AS TS 0410	400	1000			300		900		241	800	260	-	4	5.7
AS TS 0412	400	1200			300		1100		241	1000	260	500	4	6.9
AS TS 0414	400	1400			300		1300		241	1200	260	600	4	8.1
AS TS 0416	400	1600			300		1500		241	1400	260	700	6	9.3
AS TS 0418	400	1800			300		1700		241	1600	260	800	6	10.5
AS TS 0420	400	2000			300		1900		241	1800	260	900	6	11.6
AS TS 0606	600	600			500		500		441	400	460	-	4	5.1
AS TS 0608	600	800			500		708		441	600	460	-	4	7.0
AS TS 0610	600	1000			500		900		441	700	460	-	4	8.7
AS TS 0612	600	1200			500		1100		441	1000	460	500	4	10.6
AS TS 0614	600	1400			500		1300		441	1200	460	600	4	12.4
AS TS 0616	600	1600			500		1500		441	1300	460	650	6	14.2
AS TS 0618	600	1800			500		1700		441	1600	460	800	6	16.1
AS TS 0620	600	2000			500		1900		441	1800	460	900	6	17.9
AS TS 0806	800	600			700		500		641	400	660	-	4	6.9
AS TS 0808	800	800			700		700		641	700	660	-	4	9.3
AS TS 0810	800	1000			700		900		641	800	660	-	4	11.8
AS TS 0812	800	1200			700		1100		641	1000	660	500	4	14.3
AS TS 0814	800	1400			700		1300		641	1200	660	600	4	16.7
AS TS 0816	800	1600			700		1400		641	1300	660	650	6	18.0
AS TS 0818	800	1800			700		1700		641	1600	660	800	6	21.7
AS TS 0820	800	2000			700		1900		641	1800	660	900	6	24.2
AS TS 1018	1000	1800			900		1700		841	1600	860	800	6	27.3
AS TS 1020	1000	2000			900		1900		841	1800	860	900	6	30.4
AS TS 1218	1200	1800			1100		1700		1041	1600	1060	800	6	32.9
AS TS 1220	1200	2000			1100		1900		1041	1800	1060	900	6	36.7
AS TS 1418	1400	1800			1300		1700		1241	1600	1260	800	6	38.5
AS TS 1420	1400	2000			1300		1900		1241	1800	1260	900	6	42.9

Characteristics

■ Material	DIN EN 10327 DX51D+Z galvanized
■ Thickness	2 mm


Supply Includes

■ Mounting screws
■ Carriage slide support and fasteners

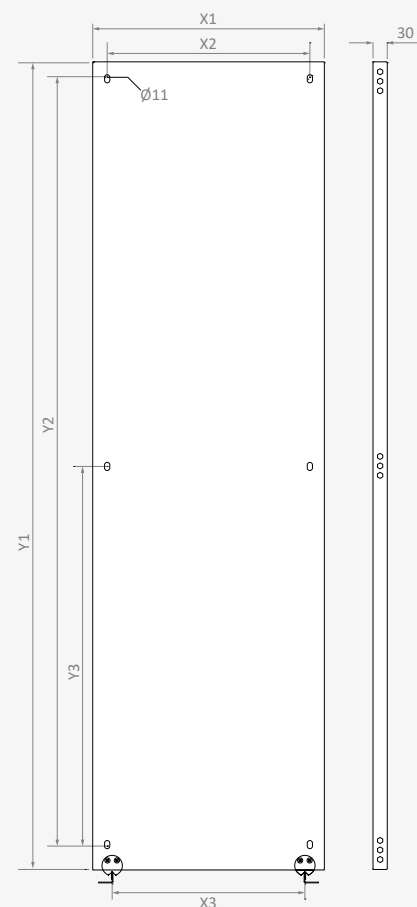

MOUNTING PLATE FIXING BRACKETS

Reference	Type	Connection	Weight	Characteristics
			kg	
MS FB 010	Front-Rear Frame Connection, Right/Left	Right/Left	0.1	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 2 mm
AS FB 012F	Front-Side Rail Connection, Right/Left	Right/Left	0.2	
AS FB 012FT-L	Front-Slide Support Connection, Left	Left	0.2	Supply Includes ■ Side rail mounting fasteners
AS FB 012FT-R	Front-Slide Support Connection, Right	Right	0.2	
AS FB 010	Side-Side Rail Connection, Right/Left	Right/Left	0.2	
AS FB 012ST-L	Side-Slide Support Connection, Left	Left	0.2	
AS FB 012ST-R	Side-Slide Support Connection, Right	Right	0.2	

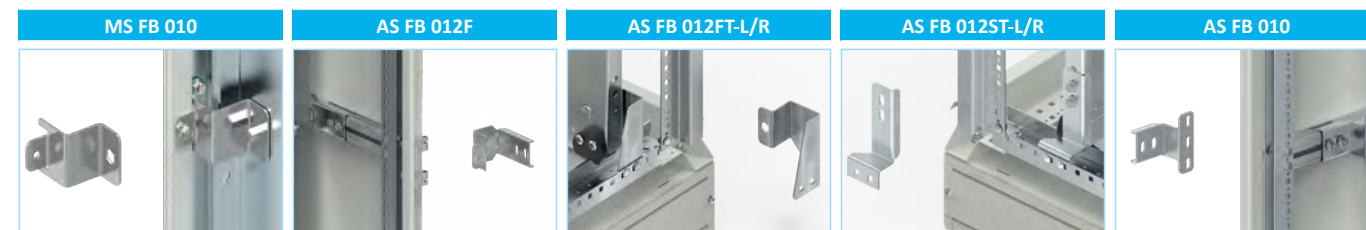

SIDE RAILS

Reference	Depth C mm	Length Z1 mm	Connection		Weight	Characteristics
			Z2 mm	Z3 mm	kg	
AS SR 040	400	224	211	192	0.2	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 1.5 mm
AS SR 050	500	324	311	292	0.3	
AS SR 060	600	424	411	392	0.4	Supply Includes ■ Mounting screws
AS SR 080	800	624	611	592	0.6	



CARRIAGE DEPTH SLIDE

Reference	Depth C mm	Length Z1 mm	Connection Z2 mm	Connection n pcs	Weight	Characteristics
					kg	
AS SRK 040	400	274	211	9	0.3	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 1.5 mm
AS SRK 050	500	374	311	14	0.5	
AS SRK 060	600	474	411	19	0.6	Supply Includes ■ Mounting screws
AS SRK 080	800	674	611	29	0.9	



EYE BOLT


Reference	Connection	Int. Diameter	Packet pcs/packet	Weight kg/packet
AS AH 020	M12	Ø 30	4	1.0
Characteristics				
■ Material	C15E Forged steel			
■ Surface Finishing	Zinc coated Cr ³ passivation			
■ Standards	DIN 580			



EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet pcs/packet	Weight kg/packet
		mm ²	mm			
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

