



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

- Sheet Steel (EN 10130 DC01)
- Frame : 1.5 mm
- Panel : 1.2 mm
- Glazed door : 1.5 mm
- Plinth : 1.5 - 2 mm
- Galvanized Steel (EN 10346 DX51D+Z)
- 19" profile : 2 mm

Surface Finishing

- RAL7035w powder coating

Others

- Multi purpose prime frame
- Glazed front door
- Lockable and removable rear panel
- Vented removable side panels
- Depth adjustable 19" upright profiles
- Brushed cable entry plate
- 2 pcs cable clamp profile
- Vented dust protection hood
- Optional filter or fan fitted or perforated cover plates
- Optional hinged rear panel
- Optional full length or partial swing frame

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Special mounting plate
- Special Racks



Supply Includes

- Front and rear frame
- Glazed door
- Lockable rear panel
- Side panels
- Plinth
- Vented dust protection hood
- Depth adjustable 19" upright profiles


Complementary Accessories

- Levelling feet
- Castor
- Top protection plate
- Top and bottom partial cover plates
- Power distribution unit
- 19" pull out perforated shelf
- Cable clamp profile
- Side rail
- Mounting plate
- Telescopic slide
- Locks
- Earthing cable
- 19" equipment shelf
- Swing frame
- Patch panel and 1U fan unit
- Cable organizer




Height units	Width	Height	Depth	Reference	Lock	Hinge	Apparent Area		Useful Area						Weight
	A	B	C						Side Panel		Lock In Doors		Top		
	U*	mm	mm		mm	pcs	pcs	↔	↕	↕	↗	↔	↕	↔	
26 U	600	1250	600	PEC 062606	1	3	410	1070	1140	368	490	1128	368	303	63
			800	PEC 062608	1	3	410	1070	1140	568	490	1128	368	503	75
			1000	PEC 062610	1	3	410	1070	1140	768	490	1128	368	703	89
32 U		1515	600	PEC 063206	1	3	410	1335	1407	368	490	1393	368	303	72
			800	PEC 063208	1	3	410	1335	1407	568	490	1393	368	503	85
			1000	PEC 063210	1	3	410	1335	1407	768	490	1393	368	703	97
39 U		1825	600	PEC 063906	1	3	410	1642	1718	368	490	1703	368	303	82
			800	PEC 063908	1	3	410	1642	1718	568	490	1703	368	503	96
			1000	PEC 063910	1	3	410	1642	1718	768	490	1703	368	703	110
43 U		2000	600	PEC 064306	1	3	410	1820	1896	368	490	1878	368	303	88
			800	PEC 064308	1	3	410	1820	1896	568	490	1878	368	503	103
			1000	PEC 064310	1	3	410	1820	1896	768	490	1878	368	703	117
47 U		2180	600	PEC 064706	1	3	410	2000	2074	368	490	2058	368	303	93
			800	PEC 064708	1	3	410	2000	2074	568	490	2058	368	503	108
			1000	PEC 064710	1	3	410	2000	2074	768	490	2058	368	703	124
26 U	800	1250	600	PEC 082606	1	3	610	1070	1140	368	690	1128	368	303	76
			800	PEC 082608	1	3	610	1070	1140	568	690	1128	368	503	89
32 U		1515	600	PEC 083206	1	3	610	1335	1407	368	690	1393	368	303	86
			800	PEC 083208	1	3	610	1335	1407	568	690	1393	368	503	99
39 U		1825	600	PEC 083906	1	3	610	1645	1718	368	690	1703	368	303	97
			800	PEC 083908	1	3	610	1645	1718	568	690	1703	368	503	112
43 U		2000	600	PEC 084306	1	3	610	1820	1896	368	690	1878	368	303	104
			800	PEC 084308	1	3	610	1820	1896	568	690	1878	368	503	119
47 U		2180	600	PEC 084706	1	3	610	2000	2074	368	690	2058	368	303	110
			800	PEC 084708	1	3	610	2000	2074	568	690	2058	368	503	125


* 1U = 44.45 mm

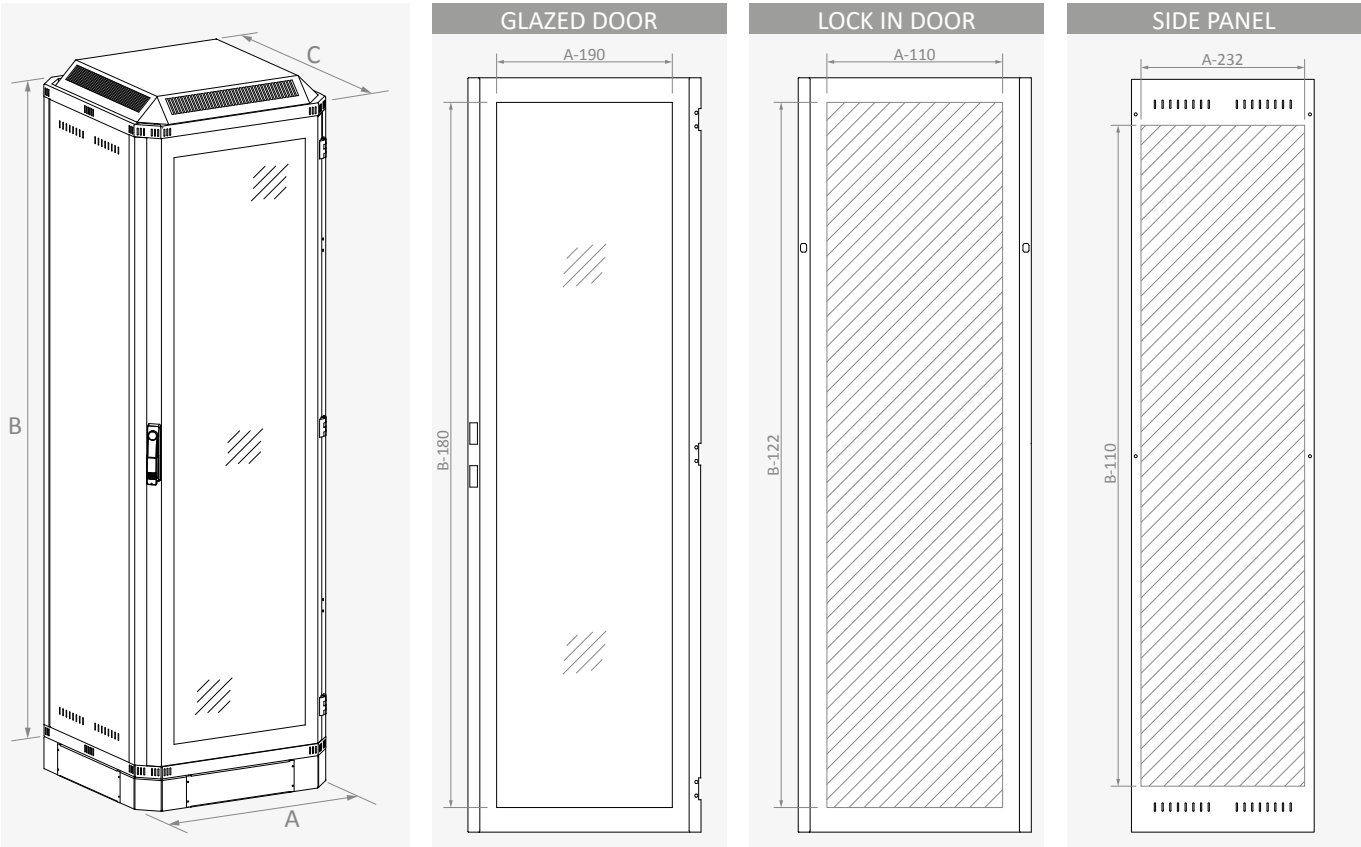


GLAZED DOOR												
Reference	Width	Height	Wide	Length	Apparent Area		Lock Type	Lock	Hinge	Weight		
	A	B			X1 mm	Y1 mm					W6 mm	H6 mm
	mm	mm										
PEC KC0626	600	1250	540	1185	410	1070	I	1	3	7.7		
PEC KC0632	600	1515	540	1450	410	1335	I	1	3	9.4		
PEC KC0639	600	1825	540	1760	410	1642	I	1	3	11.5		
PEC KC0643	600	2000	540	1935	410	1820	I	1	3	12.6		
PEC KC0647	600	2180	540	2115	410	2000	I	1	3	13.8		
PEC KC0826	800	1250	740	1185	610	1070	I	1	3	10.6		
PEC KC0832	800	1515	740	1450	610	1335	I	1	3	13		
PEC KC0839	800	1825	740	1760	610	1645	I	1	3	15.7		
PEC KC0843	800	2000	740	1935	610	1820	I	1	3	17.3		
PEC KC0847	800	2180	740	2115	610	2000	I	1	3	18.9		
Characteristics							Supply Includes					
■ Material	DIN EN 10130 DC01 CCRS / 4 mm tempered glass						■ Lock					
■ Surface Finishing	RAL7035w powder coating						■ Hinges					
■ Thickness	1.5 mm						★ I: Rod-latch					

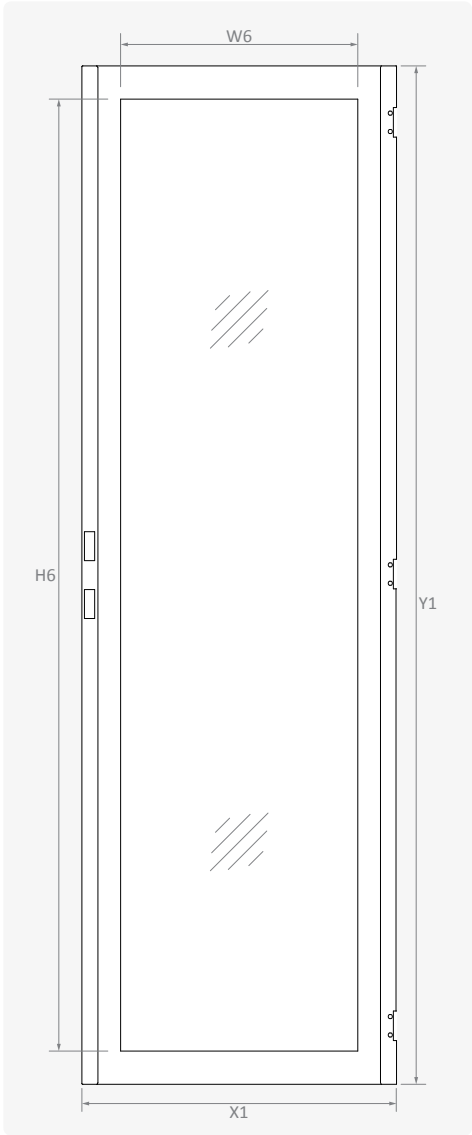


PERFORATED DOOR									
Reference	Width	Height	Wide	Length	Lock Type	Lock	Hinge	Weight	
	A	B	X1	Y1					
	mm	mm	mm	mm					
PEC KP0626	600	1250	540	1185	I	1	3	63	
PEC KP0632	600	1515	540	1450	I	1	3	72	
PEC KP0639	600	1825	540	1760	I	1	3	82	
PEC KP0643	600	2000	540	1935	I	1	3	88	
PEC KP0647	600	2180	540	2115	I	1	3	93	
PEC KP0826	800	1250	740	1185	I	1	3	76	
PEC KP0832	800	1515	740	1450	I	1	3	86	
PEC KP0839	800	1825	740	1760	I	1	3	97	
PEC KP0843	800	2000	740	1935	I	1	3	104	
PEC KP0847	800	2180	740	2115	I	1	3	110	
Characteristics					Supply Includes				
■ Material	DIN EN 10130 DC01 CCRS				■ Lock				
■ Surface Finishing	RAL7035w powder coating				■ Hinges				
■ Thickness	1.5 mm				★ I: Rod-latch				

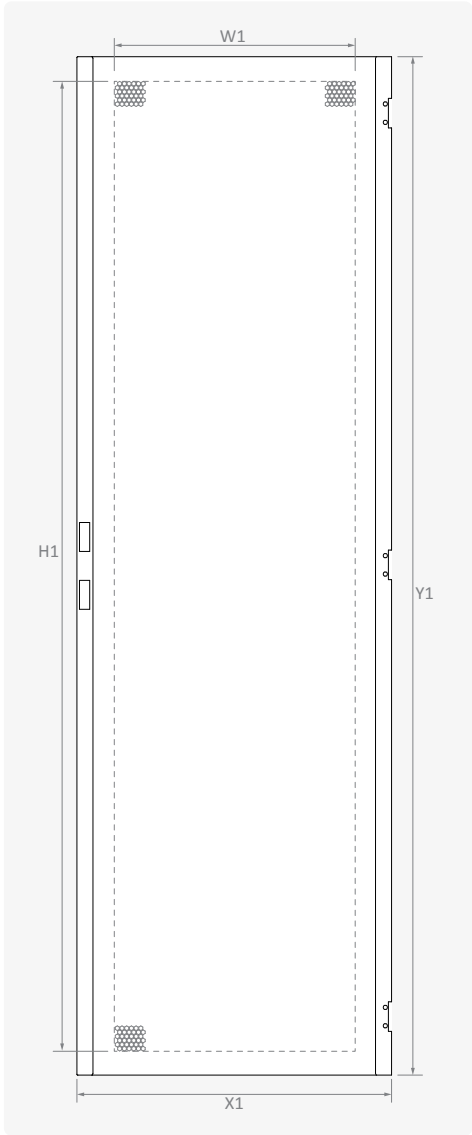

SOLID DOOR										
Reference	Width	Height	Wide	Length	Useful Area		Lock Type	Lock	Hinge	Weight
	A	B			W1 mm	H1 mm				
	mm	mm								
PEC KK0626	600	1250	540	1185	450	1125	I	1	3	7.7
PEC KK0632	600	1515	540	1450	450	1390	I	1	3	9.4
PEC KK0639	600	1825	540	1760	450	1697	I	1	3	11.5
PEC KK0643	600	2000	540	1935	450	1875	I	1	3	12.6
PEC KK0647	600	2180	540	2115	450	2055	I	1	3	13.8
PEC KK0826	800	1250	740	1185	650	1125	I	1	3	10.6
PEC KK0832	800	1515	740	1450	650	1390	I	1	3	13
PEC KK0839	800	1825	740	1760	650	1700	I	1	3	15.7
PEC KK0843	800	2000	740	1935	650	1875	I	1	3	17.3
PEC KK0847	800	2180	740	2115	650	2055	I	1	3	18.9
Characteristics							Supply Includes			
■ Material	DIN EN 10130 DC01 CCRS									
■ Surface Finishing	RAL7035w powder coating									
■ Thickness	1.5 mm									
							■ Lock			
							■ Hinges			
							★ I: Rod-latch			

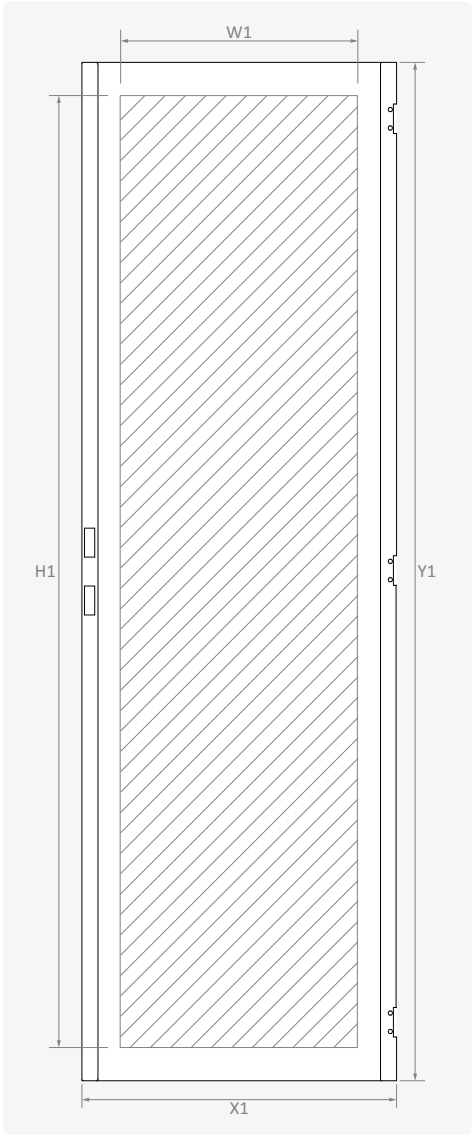


LOCK IN DOOR									
Reference	Width	Height	Wide	Length	Useful Area		Lock Type	Lock	Weight
	A	B			W1 mm	H1 mm			
	mm	mm	X1 mm	Y1 mm			*	pcs	kg
PEC ST0626	600	1250	540	1185	450	1125	C	2	6.1
PEC ST0632	600	1515	540	1450	450	1390	C	2	7.5
PEC ST0639	600	1825	540	1760	450	1697	C	2	9.1
PEC ST0643	600	2000	540	1935	450	1875	C	2	10
PEC ST0647	600	2180	540	2115	450	2055	C	2	10.9
PEC ST0826	800	1250	740	1185	650	1125	C	2	8.4
PEC ST0832	800	1515	740	1450	650	1390	C	2	10.3
PEC ST0839	800	1825	740	1760	650	1700	C	2	12.5
PEC ST0843	800	2000	740	1935	650	1875	C	2	13.7
PEC ST0847	800	2180	740	2115	650	2055	C	2	15
Characteristics						Supply Includes			
■ Material	DIN EN 10130 DC01 CCRS					■ Lock			
■ Surface Finishing	RAL7035w powder coating					* C: Quarter Turn			
■ Thickness	1.5 mm								

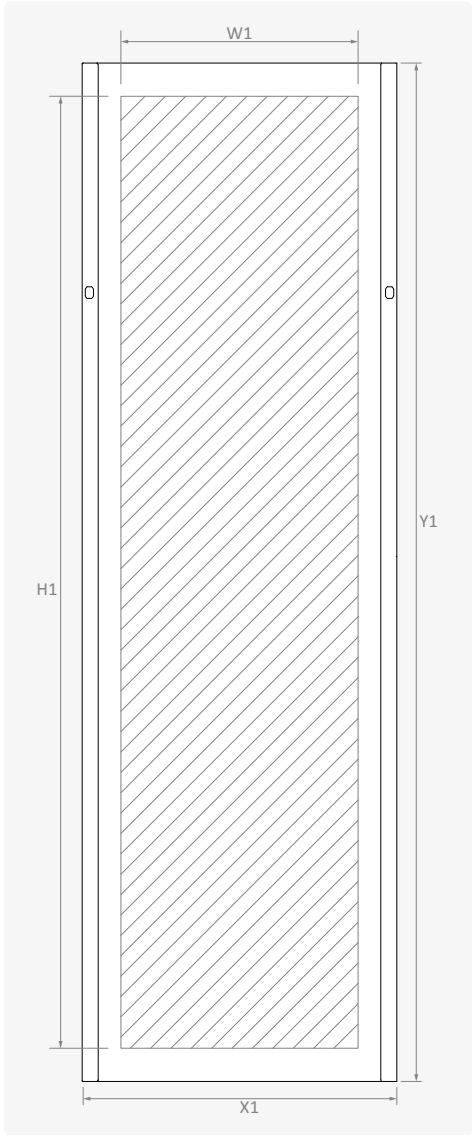

SIDE PANEL							
Reference	Height	Depth	Wide	Length	Useful Area		Weight
	B	C					
	mm	mm					
PEC YV2606	1250	600	430	1185	1025	390	4.8
PEC YV2608		800	630	1185	1025	590	7.1
PEC YV2610		1000	830	1185	1025	790	9.4
PEC YV3206	1515	600	430	1450	1290	390	5.9
PEC YV3208		800	630	1450	1290	590	8.7
PEC YV3210		1000	830	1450	1290	790	11.5
PEC YV3906	1825	600	430	1760	1600	390	7.2
PEC YV3908		800	630	1760	1600	590	10.6
PEC YV3910		1000	830	1760	1600	790	14
PEC YV4306	2000	600	430	1935	1775	390	7.9
PEC YV4308		800	630	1935	1775	590	11.7
PEC YV4310		1000	830	1935	1775	790	15.4
PEC YV4706	2180	600	430	2115	1955	390	8.7
PEC YV4708		800	630	2115	1955	590	12.7
PEC YV4710		1000	830	2115	1955	790	16.8

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Side / Top panel mounting screw set	
■ Surface Finishing	RAL7035w powder coating		
■ Thickness	1.2 mm		

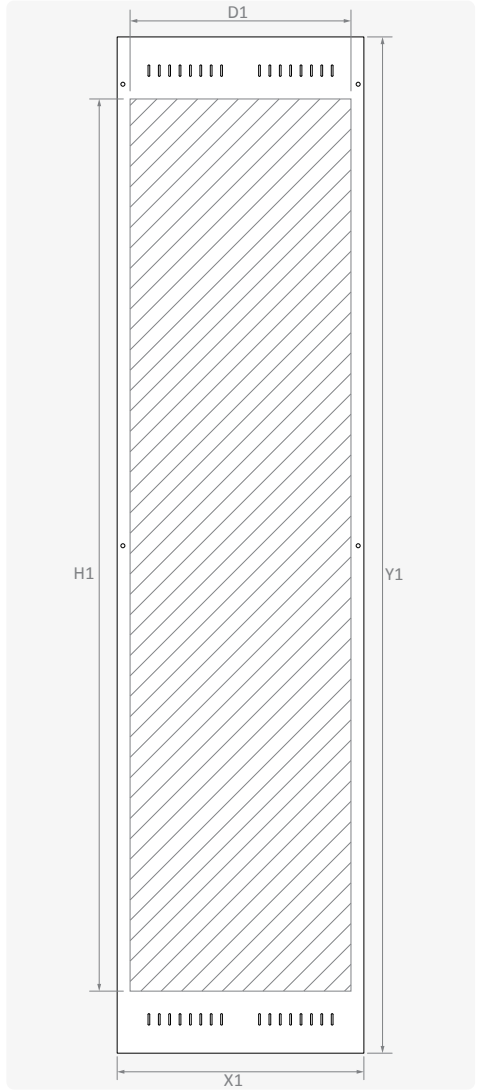

PLINTHS				
Blank Reference	Perforated Reference	Width / Depth	Corner Pieces Reference	Characteristics
		X		
		mm		
PEC BZK061	PEC BZP061	600	PEC BZC010	■ Material DIN EN 10130 DC01 CCRS
PEC BZK081	PEC BZP081	800		■ Surface Finishing RAL7035w powder coating
PEC BZK101	PEC BZP101	1000		■ Thickness 1.5 - 2 mm
				Supply Includes
				■ Castors can also be used with plinth



TOP PROTECTION PLATE		
Reference	Width	Depth
	A	C
	mm	mm
PEC US0606	600	600
PEC US0608	600	800
PEC US0610	600	1000
PEC US0806	800	600
PEC US0808	800	800
Characteristics		
■ Material	DIN EN 10130 DC01 CCRS	
■ Surface Finishing	RAL7035w powder coating	
■ Thickness	1.5 mm	




VENTED DUST PROTECTION HOOD		
Reference	Width	Depth
	A	C
	mm	mm
PEC UK0606	600	600
PEC UK0608	600	800
PEC UK0610	600	1000
PEC UK0806	800	600
PEC UK0808	800	800
Characteristics		
■ Material	DIN EN 10130 DC01 CCRS	
■ Surface Finishing	RAL7035w powder coating	
■ Thickness	1.5 mm	




SWING FRAME				
Reference	Enclosure Height *	Swing Frame Height *	Sizes	
			J	H
	U	U	mm	mm
PEC SF0623	26 U	23 U	1092	1026
PEC SF0629	32 U	29 U	1359	1293
PEC SF0636	39 U	36 U	1670	1604
PEC SF0640	43 U	40 U	1848	1782
PEC SF0644	47 U	44 U	2025	1959

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm
Supply Includes	
■ Mounting screws	
* 1U = 44.45 mm	

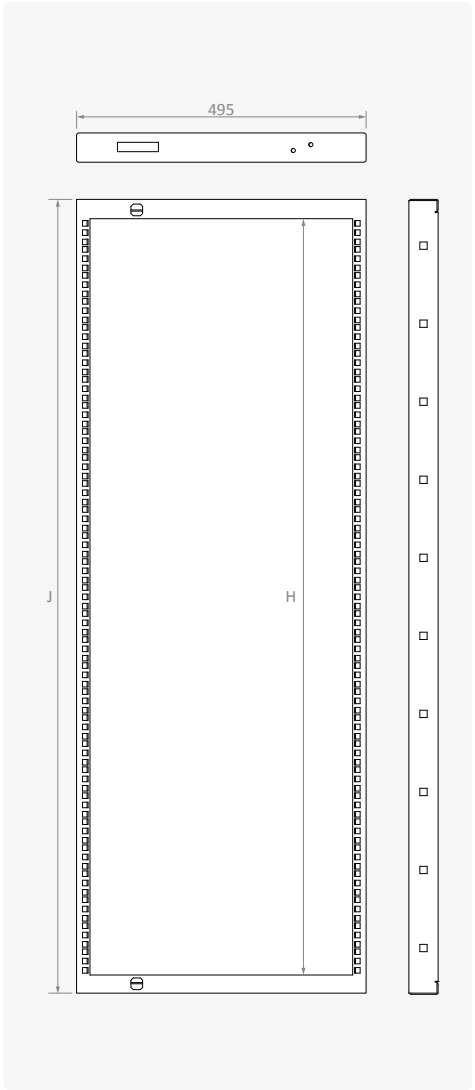


PARTIAL SWING FRAME			
Reference	Swing Frame Height *	Sizes	
		J	H
	U	mm	mm
PEC SF0606	6 U	336	270
PEC SF0609	9 U	470	404
PEC SF0612	12 U	603	537
PEC SF0615	15 U	736	670
PEC SF0618	18 U	870	804

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	RAL7035w powder coating
■ Thickness	2 mm
Supply Includes	
■ Mounting screws	
* 1U = 44.45 mm	

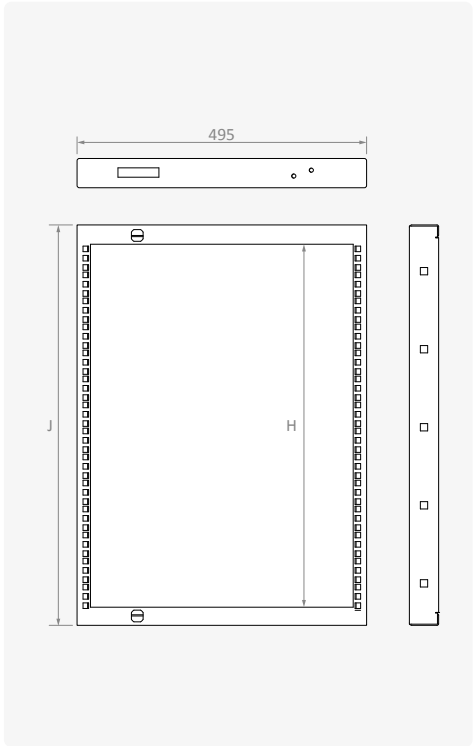

Swing Frame Position	Width	Equipment Depth
	A	M
1. POSITION	mm	mm
	600	150
2. POSITION	800	315
	600	--
	800	470


Maximum equipment installation depth on swing frame

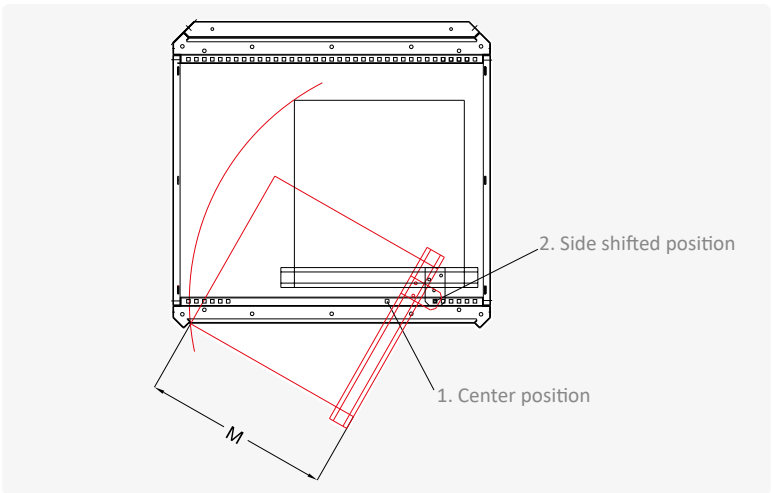

PARTIAL SWING FRAME FIXING PROFILES			
Reference	Width	Characteristics	
	A	■ Material	DIN EN 10130 DC01 CCRS
	mm	■ Surface Finishing	RAL7035w powder coating
PEC PRS060	600	■ Thickness	2 mm
PEC PRS080	800		


19" UPRIGHT PROFILES

Reference	Height Units *	Enclosure Height B	Characteristics	
		mm	Material	DIN EN 10327 DX51D+Z galvanized
			Thickness	2 mm
			* 1U = 44.45 mm	
PEC PRO2600	26 U	1250		
PEC PRO3200	32 U	1515		
PEC PRO3900	39 U	1825		
PEC PRO4300	43 U	2000		
PEC PRO4700	47 U	2180		

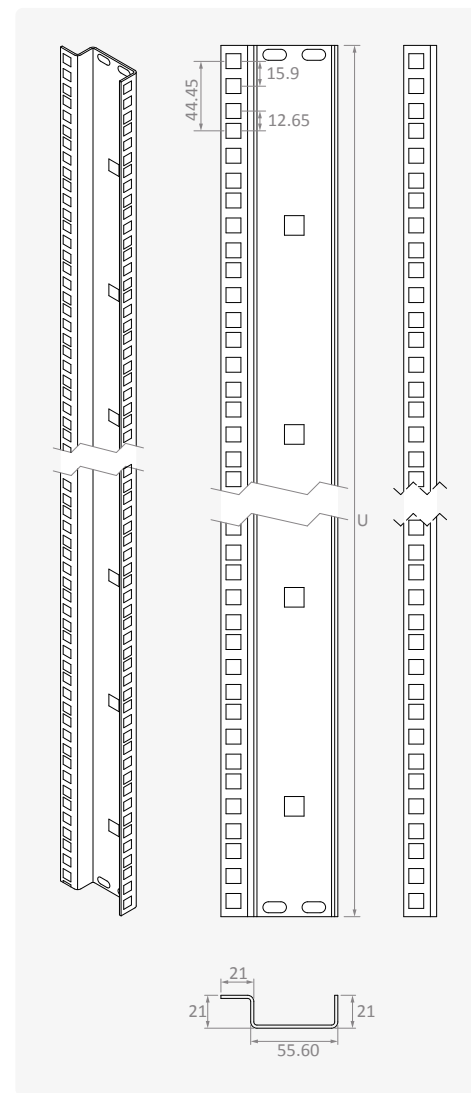

19" ADJUSTABLE PERFORATED SHELF

Reference	Depth	Characteristics	
	C	Material	DIN EN 10130 DC01 CCRS
	mm	Surface Finishing	RAL7035w powder coating
		Thickness	1.5 mm
PEC RPA0606	600	Supply Includes	
PEC RPA0608	800	Mounting fasteners	
PEC RPA0610	1000		

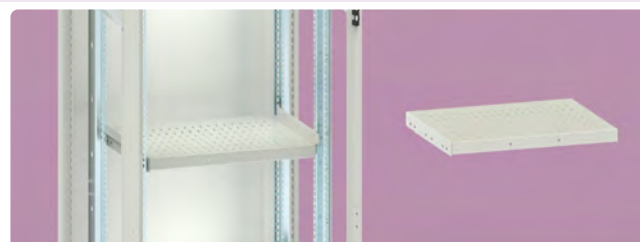

PULL OUT PERFORATED SHELVES

Reference	Depth	Characteristics	
	C	Material	DIN EN 10130 DC01 CCRS
	mm	Surface Finishing	RAL7035w powder coating
		Thickness	1.5 mm
PEC RPT0606	600	Supply Includes	
PEC RPT0608	800	Shelf	
		Pull out side rails	
		Connection profiles and mounting fasteners	




19" EQUIPMENT SHELF

Reference	Depth	Characteristics	
	C	Material	DIN EN 10327 DX51D+Z galvanized
	mm	Thickness	1.5 mm
PEC RPC0602	240	Supply Includes	
		Connection profiles and mounting fasteners	




19" PULL & DROP SHELVES

Reference	Depth	Characteristics	
	C	Material	DIN EN 10327 DX51D+Z galvanized
	mm	Thickness	2 mm
PEC RPK0606	600	Supply Includes	
PEC RPK0608	800	Connection profiles and mounting fasteners	

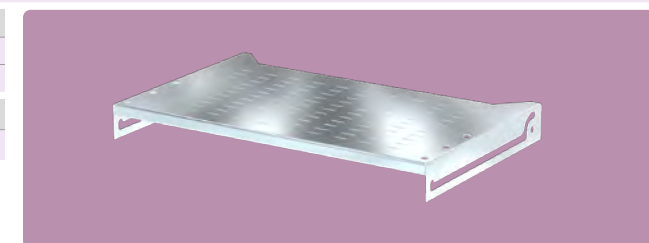

HANDLE

Reference	
HDKLP 0110	Handle

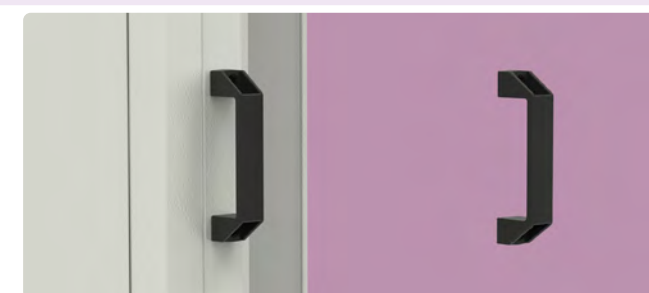


HANDLE (VARIABLE LENGTHS)

Reference	
HDKL 80500	Tube Handle (L:500mm)



PATCH PANELS


Blank Patch Panels	
Reference	Panel Height
PEC PP1000	1 U
PEC PP2000	2 U
PEC PP3000	3 U
PEC PP6000	6 U

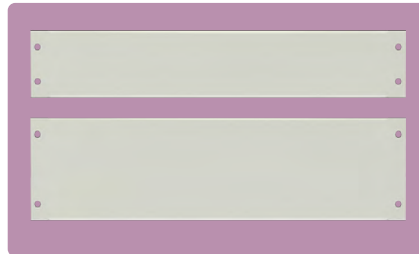

Brushed Cable Entry Panel	
Reference	Panel Height
PEC PP1001	1 U



Perforated Patch Panel	
Reference	Panel Height
PEC PP1002	1 U

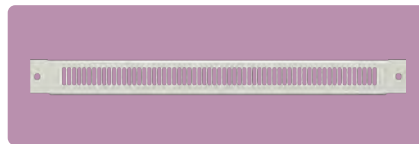

Cable Organizer Panel	
Reference	Panel Height
PEC PP1003	1 U



Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm




TOP AND BOTTOM PARTIAL COVER PLATE

Blank Cover Plate	
Reference	Plate Height
PEC PDK010	100 mm
PEC PDK020	200 mm



Cover Plate With Grilled Fan	
Reference	Plate Height
PEC PDF020F	200 mm



Perforated (vented) Cover Plate	
Reference	Plate Height
PEC PDP020	200 mm



Cover Plate With Grilled Filter	
Reference	Plate Height
PEC PHD020F	200 mm



Brushed Cable Entry Cover Plate	
Reference	Plate Height
PEC PDC010	100 mm



Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

POWER DISTRIBUTION UNITS

Reference	Width A	6 Outlets, with 16A 220V AC, without cable
PRTM191F0G6	700 mm	



LEVELLING FEET / CASTOR

Reference
HDP A00000085



Reference
HDTKS0803210



With Brake

Reference
HDTKD0803210




With Out Brake

1U FAN UNITS

Reference	Height Units *	Number of Fans
PEC FR1031	1 U	3
PEC FR1061	1 U	6


Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm
* 1U = 44.45 mm	

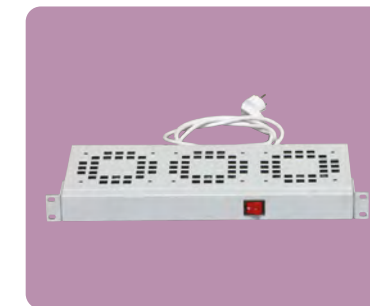

CABLE CLAMP PROFILES

Reference	Depth C mm
PEC PRD060	600
PEC PRD080	800
PEC PRD100	1000

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm
Supply Includes	
Mounting fasteners	

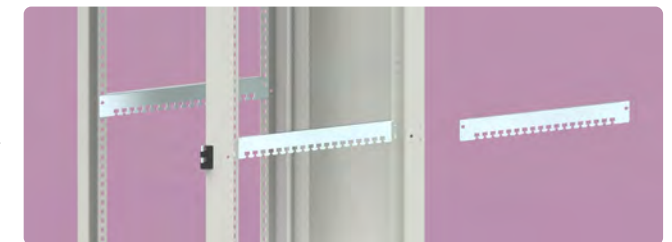

CABLE ORGANIZER

Reference
HDP A00000120


Characteristics	
Material	Plastic



SIDE RAILS



Reference	Depth C mm	Length Z1 mm	Connection		Weight kg
			Z2 mm	Z3 mm	
AS SR 040	400	224	211	192	0.2
AS SR 050	500	324	311	292	0.3
AS SR 060	600	424	411	392	0.4
AS SR 080	800	624	611	592	0.6

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm
Supply Includes	
Mounting screws	

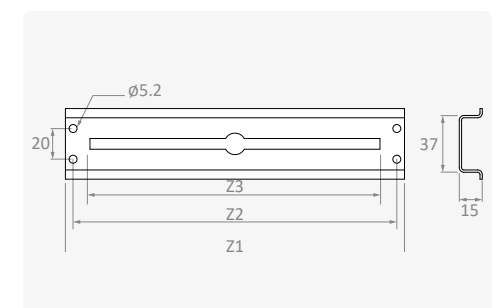

PARTIAL MOUNTING PLATE FIXING BRACKETS


Reference	Connection	Weight	Characteristics	
		kg	Material	Thickness
AS FB 021	Vertical	0.05	DIN EN 10327 DX51D+Z galvanized	2 mm
AS FB 031	Horizontal	0.05	Supply Includes ■ Side rail mounting fasteners	

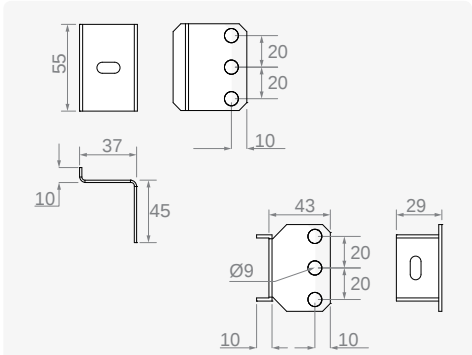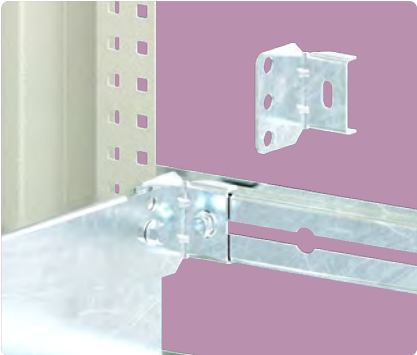

AS FB 021AS FB 031


SUPPORT PROFILES

Reference	Width	Characteristics	
	A mm	Material	Thickness
PEC TSK6060	600	DIN EN 10327 DX51D+Z galvanized	2 mm
PEC TSK8060	800		

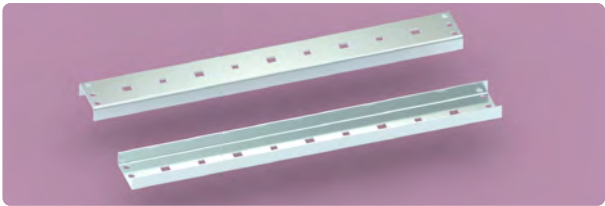



MOUNTING PROFILE INSIDE DOOR

Reference	Condition	Width	Height	Length	Weight	Characteristics
		A	B	Y1	kg	
PNASKUY00400	Horizontal	400	-	220	0.1	■ Material 20x20 square profile galvanized ■ Thickness 1.2 mm
PNASKUY00500	Horizontal	500	-	320	0.2	
PNASKUY00600	Horizontal / Vertical	600	600	420	0.3	
PNASKUY00800	Horizontal	800	-	620	0.4	
PNASKUD00900	Vertical	-	900	720	0.5	
PNASKUY001000	Horizontal	1000	-	820	0.6	
PNASKUD01200	Vertical	-	1200	1020	0.7	
PNASKUD01500	Vertical	-	1500	1320	0.9	
PNASKUD01800	Vertical	-	1800	1620	1.1	
PNASKUD02000	Vertical	-	2000	1820	1.2	

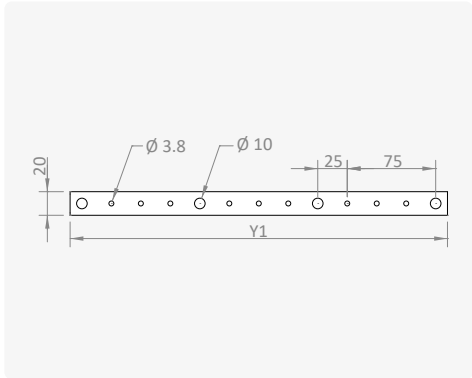


PLAN POCKETS

Reference	Width	Length			Weight	Characteristics	
	A mm	X1 mm	Y1 mm	Z1 mm		Material	Surface Finishing
AS PJ 040	All Dimensions	A4	200	30	0.4	DIN EN 10130 DC01 CCRS	RAL7035w powder coating
AS PJ 060	600/1200	A3	240	60	1.9	■ Thickness 1.5 mm	
AS PJ 080	800	A3	240	60	2.6		

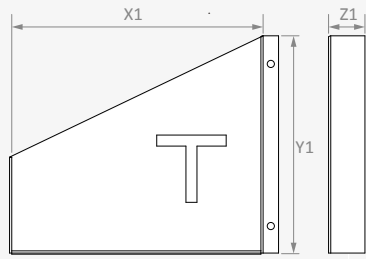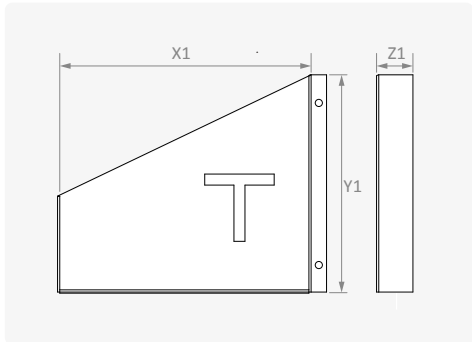


19" MOUNTING SET

Reference	Supply Includes
PNSKCM0616YS-0	■ 50 pcs. M6 cage nut 50 pcs. M6x16 YSB screw 50 pcs. M6 plastic retaining washer

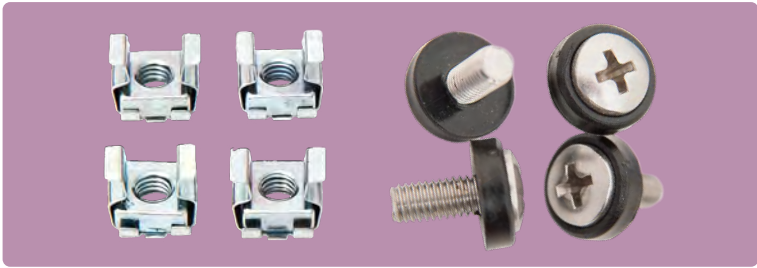


TELESCOPIC SLIDES

Reference	Depth	Supply Includes
	C mm	■ 2 pcs / set
AS TR 0110	600	
AS TR 0600	800	

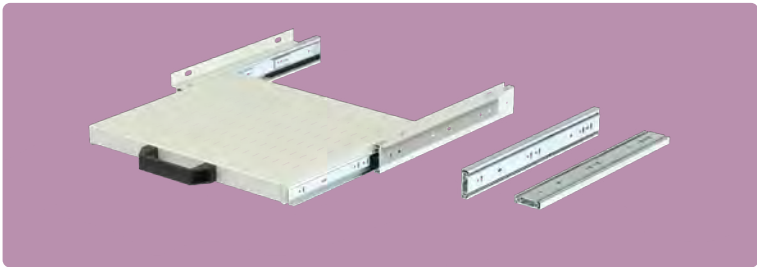

LOCKS & HINGES


Reference	Description
KITPPSKOPS2Z0	Swinghandle (escutcheon & key)
KITPP5KSOPS2Z0	Swinghandle (Double bit & key)
KIATKY2535796T1	Quarter turn (Double bit & key)
MNPR0100	Die casting, 135° opening hinge

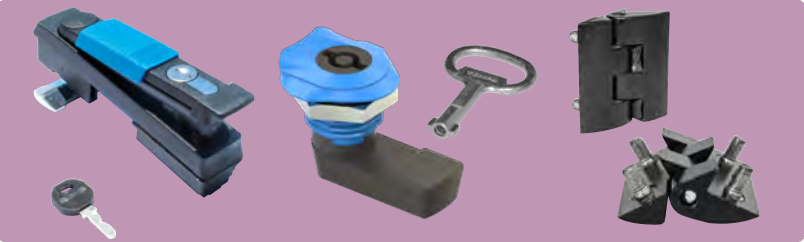

EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm²	mm		pcs/packet	kg/packet
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

