



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

- Material**
- Sheet Steel (EN 10130 DC01)
 - Body : 1.2 / 1.5 mm
 - Door : 2 mm
 - Plinth : 2 mm
 - Galvanized Steel (EN 10346 DX51D+Z)
 - Mounting plate : 2 mm
- Surface Finishing**
- RAL7035w powder coating
- IP Rating**
- IP54 (TS 3033, EN 60529) (PT)
- Others**
- Foamed-in door PU sealing gasket
 - Removable rear panel
 - Depth adjustable mounting plate
 - Top lid stopper
 - Facility for double mounting plate

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Special mounting plate



Supply Includes


- Body
- Door and lids
- Plinth
- Mounting plate
- 4 pcs side rails

Complementary Accessories


- Door inside mounting profile
- Plan pocket
- Earthing cable
- Handle




Width	Height	Depth	Reference	Lower Door	Removable Rear Panel	Useful Area						Mounting Plate		Weight
A	B	C				Top Lid		Lower Door		Rear Panel				
mm	mm	mm		pcs	pcs	↔	↕	↔	↕	↔	↕	↔	↕	
						mm	mm	mm	mm	mm	mm	mm	mm	
600	1065	400	PT 061040	1	1	495	370	420	420	500	790	500	800	49.8
		500	PT 061050	1	1	495	470	420	420	500	790	500	800	54.7
800	1065	500	PT 081050	1	1	695	470	620	420	700	790	700	800	65.0
		600	PT 081060	1	1	695	570	620	420	700	790	700	800	69.8
1000	1065	500	PT 101050	2	1	895	470	320 + 320	420	900	790	900	800	75.6
		600	PT 101060	2	1	895	570	320 + 320	420	900	790	900	800	81.2
1200	1065	600	PT 121060	2	1	1095	570	420 + 420	420	1100	790	1100	800	91.6

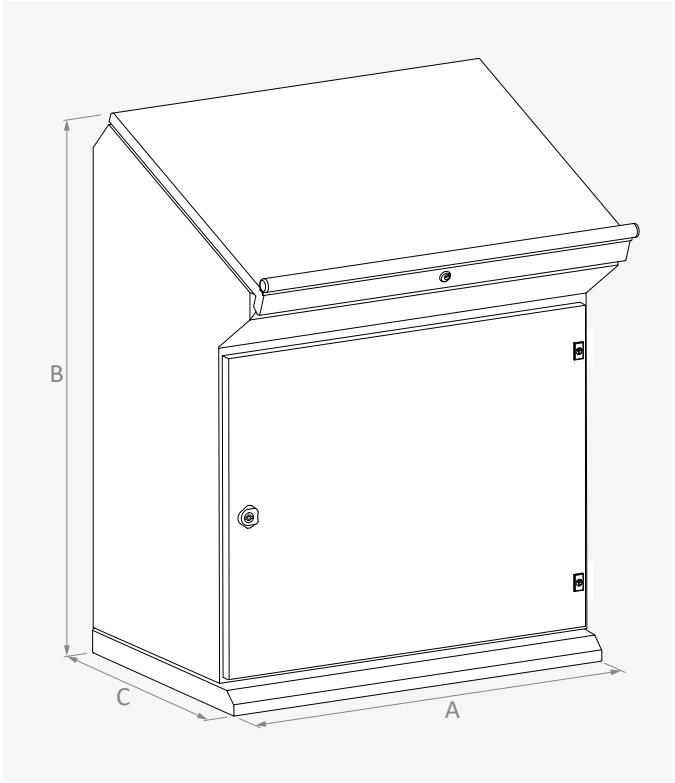


LOWER DOOR USEFUL AREA

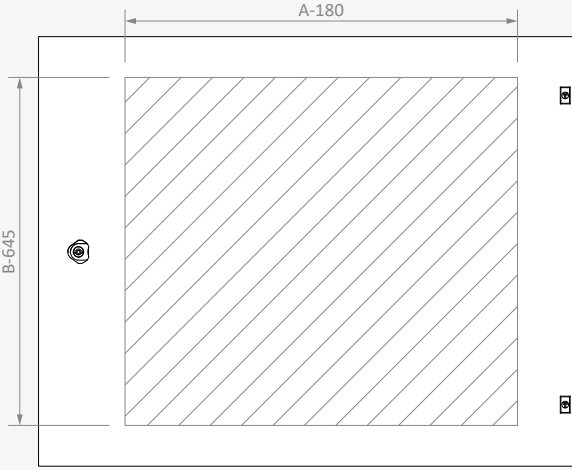


TOP LID USEFUL AREA

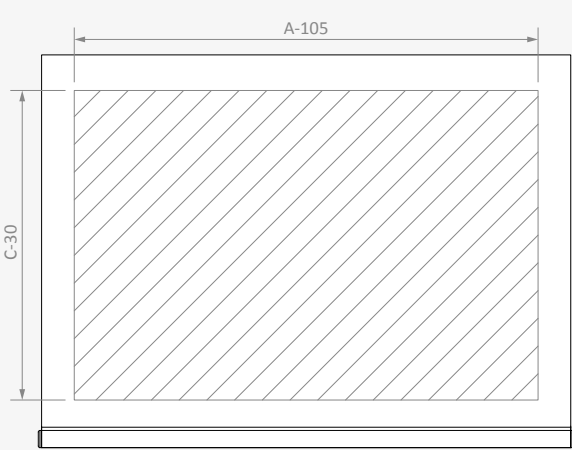

REAR PANEL USEFUL AREA

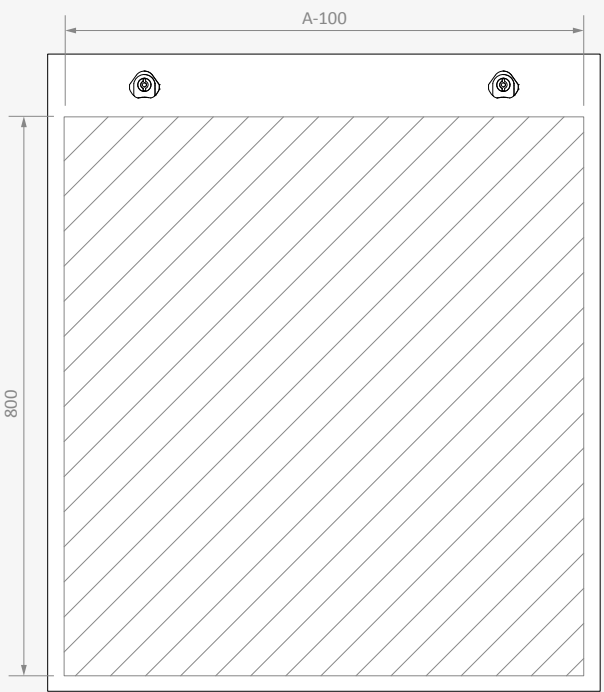


MOUNTING PLATE

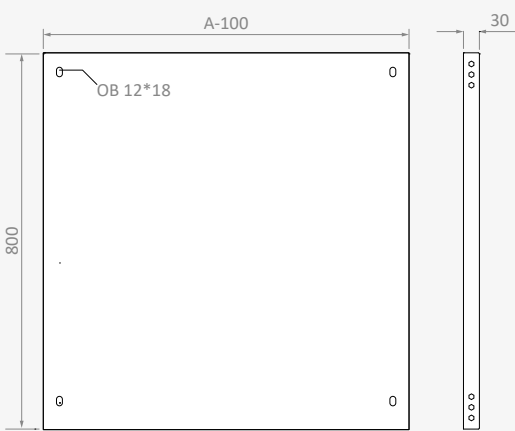

TOP LID										
Reference	Width	Depth	Wide	Length	Useful Area		Lid	Lock Type	Hinge	Weight
	A	C	X1	Y1	W1	D1				
	mm	mm	mm	mm	mm	mm				
PT TAV0640	600	400	596	511	495	370	1	C	2	3.6
PT TAV0650	600	500	596	611	495	470	1	C	2	4.3
PT TAV0850	800	500	796	611	695	470	1	C	2	5.8
PT TAV0860	800	600	796	711	695	570	1	C	2	6.7
PT TAV1050	1000	500	996	611	895	470	1	C	2	7.3
PT TAV1060	1000	600	996	711	895	570	1	C	2	8.4
PT TAV1260	1200	600	1196	711	1095	570	1	C	2	10.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm


Supply Includes	
Lock	
Hinges	
* C: Quarter Turn	

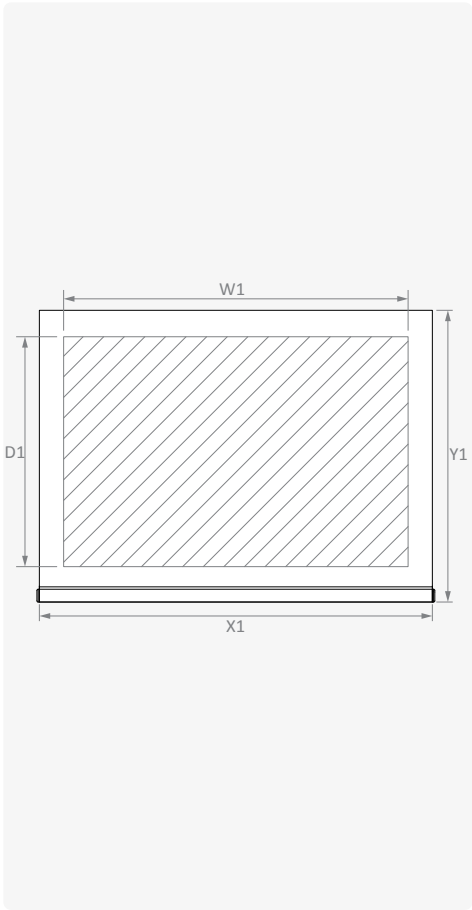


LOWER DOOR										
Reference	Width	Height	Wide	Length	Useful Area		Door	Lock Type	Hinge	Weight
	A	B	X1	Y1	W1	H1				
	mm	mm	mm	mm	mm	mm				
PT KP0610	600	1065	580	625	420	420	1	C	2	5.8
PT KP0810	800	1065	780	625	620	420	1	C	2	7.8
PT KP1010	1000	1065	490 + 490	625	320 + 320	420	2	C	4	9.8
PT KP1210	1200	1065	590 + 590	625	420 + 420	420	2	C	4	11.8

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes	
Lock	
Hinges	
* C: Quarter Turn	

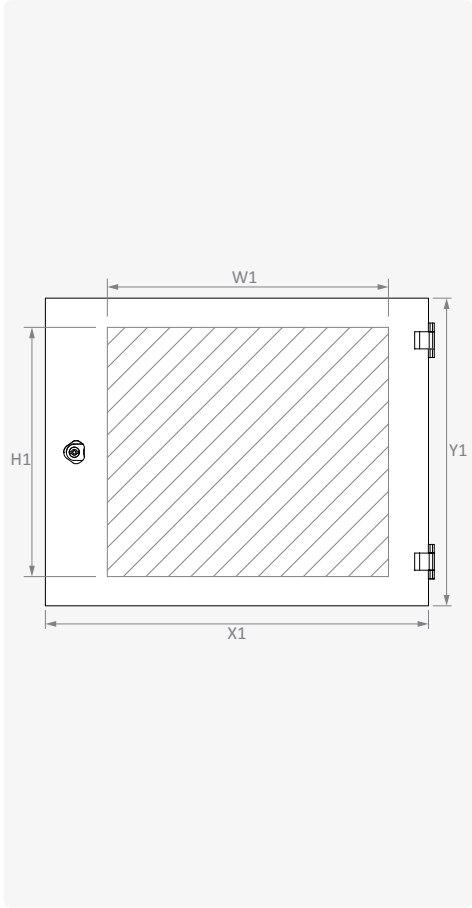


MOUNTING PLATE									
Reference	Width		Height	Wide		Length		Connection	
	A	B		X1	Y1	X2	Y2	X3	n
	mm	mm		mm	mm	mm	mm	mm	pcs
AS TS 0609	600	1065		500	800	441	680	420	4
AS TS 0809	800	1065		700	800	641	680	620	4
AS TS 1009	1000	1065		900	800	841	680	820	6
AS TS 1209	1200	1065		1100	800	1041	680	1020	6
Weight									
kg									
Characteristics									
■ Material									
DIN EN 10327 DX51D+Z galvanized									
■ Thickness									
2 mm									
Supply Includes									
■ Mounting screws									
■ Carriage slide support and fasteners									

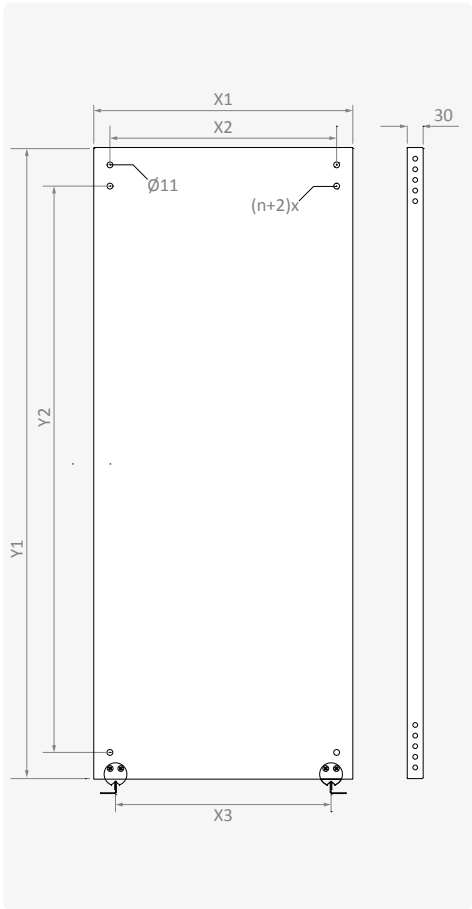


MOUNTING PLATE FIXING BRACKETS			
Reference	Type	Connection	Weight
			kg
AS FB 010	Side-Side Rail Connection, Right/Left	Right/Left	0.2
Characteristics			
■ Material			
DIN EN 10327 DX51D+Z galvanized			
■ Thickness			
2 mm			
Supply Includes			
■ Side rail mounting fasteners			



PARTIAL MOUNTING PLATE							
Reference	Width		Length		Connection		Weight
	A	X1	Y1	Y3	X2	Y2	kg
	mm	mm	mm	mm	mm	mm	
AS TSK 0616	600	512	160	130	495	140	1.7
AS TSK 0622	600	512	220	190	495	200	2.2
AS TSK 0628	600	512	280	250	495	260	2.7
AS TSK 0636	600	512	360	330	495	340	3.3
AS TSK 0816	800	712	160	130	695	140	2.4
AS TSK 0822	800	712	220	190	695	200	3.1
AS TSK 0828	800	712	280	250	695	260	3.8
AS TSK 0836	800	712	360	330	695	340	4.7
AS TSK 1016	1000	912	160	130	895	140	3.1
AS TSK 1022	1000	912	220	190	895	200	4.0
AS TSK 1028	1000	912	280	250	895	260	4.8
AS TSK 1036	1000	912	360	330	895	340	6.0
AS TSK 1216	1200	1112	160	130	1095	140	3.8
AS TSK 1222	1200	1112	220	190	1095	200	4.8
AS TSK 1228	1200	1112	280	250	1095	260	5.9
AS TSK 1236	1200	1112	360	330	1095	340	7.3
Characteristics							
■ Material							
DIN EN 10327 DX51D+Z galvanized							
■ Thickness							
2 mm							
Supply Includes							
■ Mounting screws							

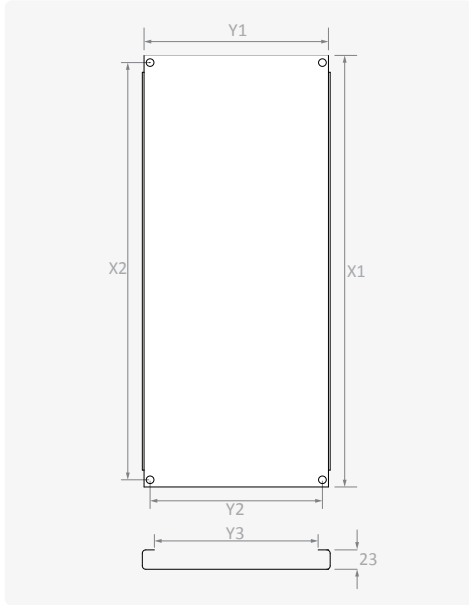


PARTIAL MOUNTING PLATE FIXING S				
Reference	Connection	Weight	Characteristics	
		kg	■ Material	DIN EN 10327 DX51D+Z galvanized
AS FB 021	Vertical	0.05	■ Thickness	2 mm
AS FB 031	Horizontal	0.05	Supply Includes	
			■ Side rail mounting fasteners	

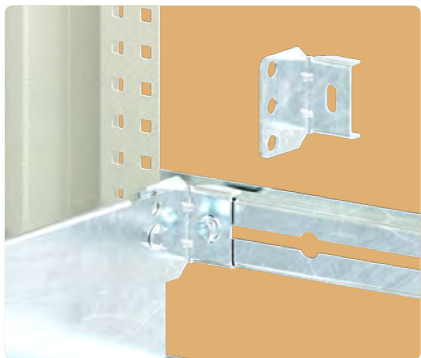

AS FB 021




AS FB 031

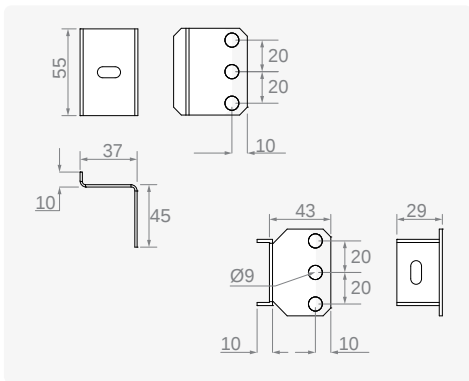


REAR PANEL										
Reference	Width		Height	Wide	Length	Useful Area		Rear Panel	Lock	Lock Type
	A	B				W1	H1			
	mm	mm				mm	mm			
PT ST0610	600	1065		560	875	500	790	1	2	C
PT ST0810	800	1065		760	875	700	790	1	2	C
PT ST1010	1000	1065		960	875	900	790	1	2	C
PT ST1210	1200	1065		1160	875	1100	790	1	2	C

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Lock	
■ Surface Finishing	RAL7035w powder coating	* C: Quarter Turn	
■ Thickness	1.5 mm		

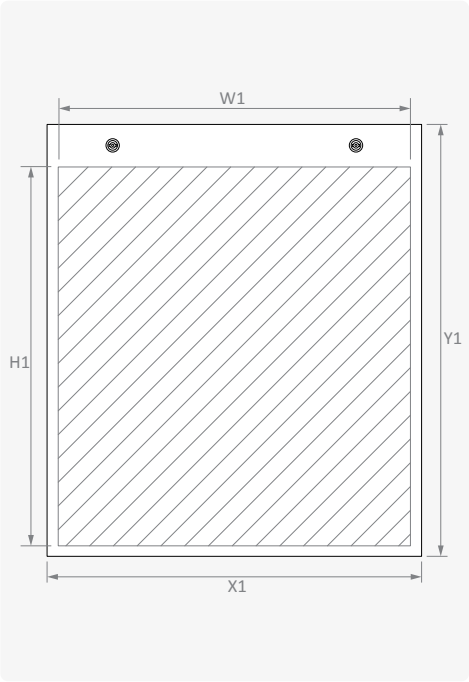

SIDE RAILS					
Reference	Depth		Length		Weight
	C	Z1	Z2	Z3	
	mm	mm	mm	mm	
AS SR 040	400	224	211	192	0.2
AS SR 050	500	324	311	292	0.3
AS SR 060	600	424	411	392	0.4

Characteristics	
■ Material	DIN EN 10327 DX51D+Z galvanized
■ Thickness	1.5 mm
Supply Includes	
■ Mounting screws	

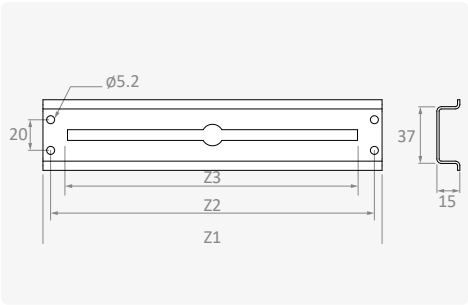

LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
		Casing	Cam	Key Type	**
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn; I: Escutcheon
** Keys should be ordered separately.




EARTHING CABLE


Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm²	mm		pcs/packet	kg/packet
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2



PLAN POCKETS

Reference	Width	Length			Weight	Characteristics	
	A	X1	Y1	Z1		■ Material	DIN EN 10130 DC01 CCRS
	mm	mm	mm	mm		■ Surface Finishing	RAL7035w powder coating
AS PJ 040	All Dimensions	A4	200	30	0.4	■ Thickness	1.5 mm
AS PJ 060	600/1200	A3	240	60	1.9	Supply Includes	
AS PJ 080	800	A3	240	60	2.6	■ Mounting fasteners to fix door reinforcement frame	

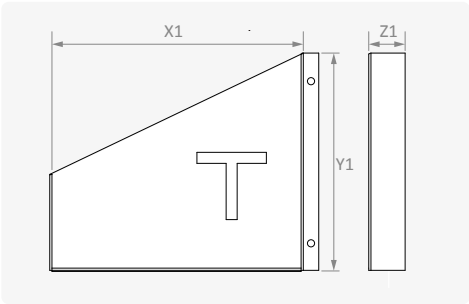



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

