



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Sheet Steel (EN 10130 DC01)
■ Body : 1.2 / 1.5 mm
■ Door : 1.5 mm
■ Plinth : 2 mm
Galvanized Steel (EN 10346 DX51D+Z)
■ Mounting plate : 2 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating

■ IP55 (TS 3033, EN 60529) (PTE)

Others

■ Foamed-in door PU sealing gasket
■ Top lid stopper

On Request

■ Custom sizes
■ Custom colour
■ Pre-punching
■ Special mounting plate







Supply Includes

■ Body
■ Door and lids
■ Mounting plate

Complementary Accessories


■ Door inside mounting profile
■ Plan pocket
■ Earthing cable
■ Handle

Width	Height	Depth	Reference	Lower Door	Useful Area				Mounting Plate		Weight
A	B	C			Top Lid		Lower Door		↔ mm	↕ mm	
mm	mm	mm		↔ mm	↕ mm	↔ mm	↕ mm				
pcs	mm	mm		mm	mm	mm	mm	kg			
500	1065	330	PTE 051033	1	420	270	320	520	400	800	29.7
600	1065	330	PTE 061033	1	520	270	420	520	500	800	24.8
700	1065	330	PTE 071033	1	620	270	520	520	600	800	39.9

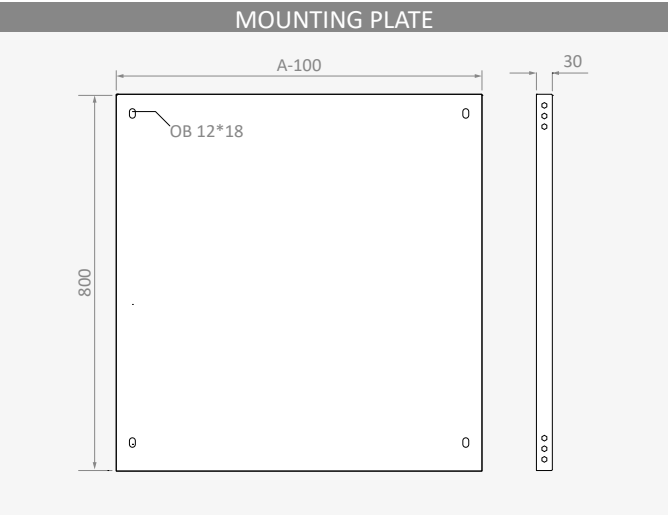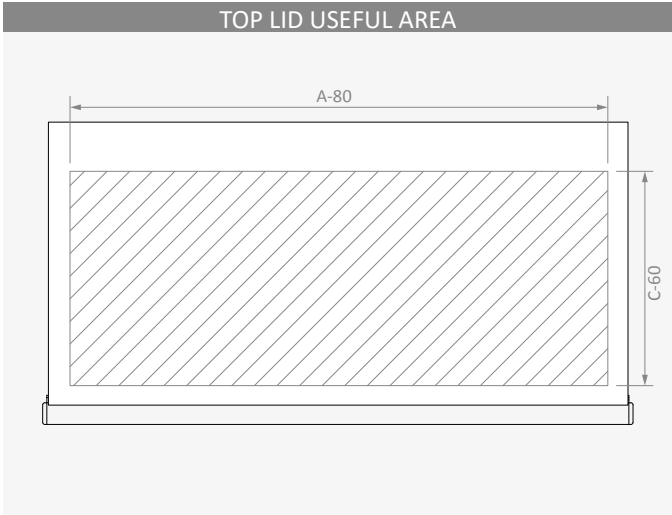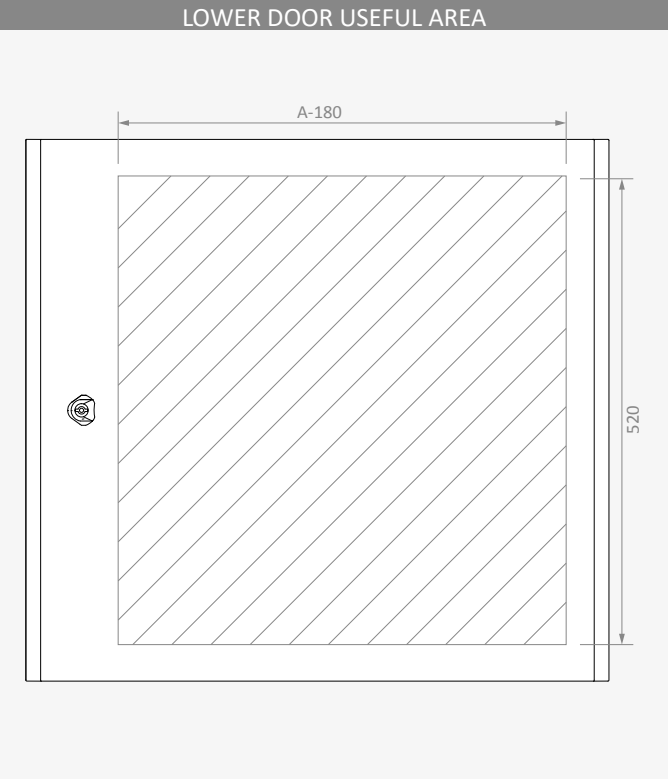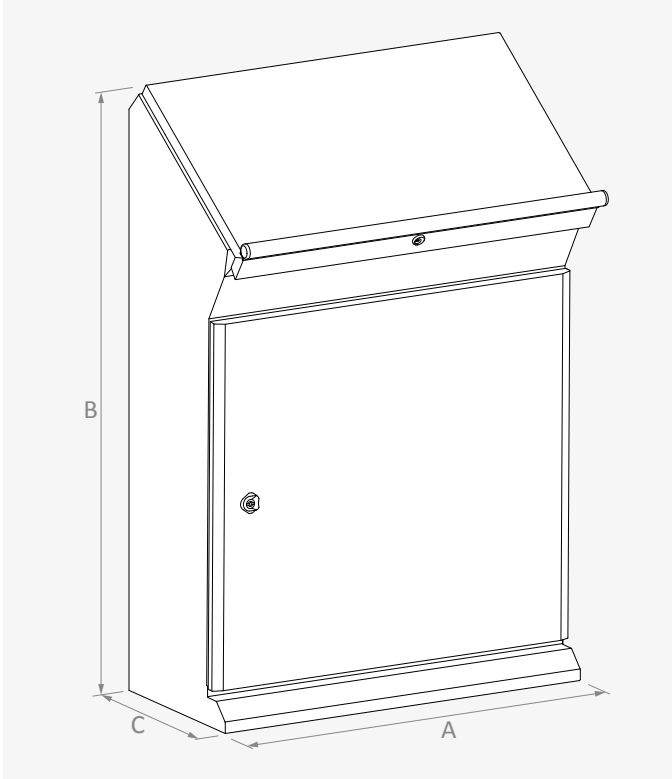


TOP LID									
Reference	Width	Depth	Wide	Length	Useful Area		Lid	Hinge	Weight
	A mm	C mm	X1 mm	Y1 mm	W1 mm	D1 mm	pcs	pcs	kg
PTE TAV0533	500	330	500	406	420	270	1	2	2.4
PTE TAV0633	600	330	600	406	520	270	1	2	2.9
PTE TAV0733	700	330	700	406	620	270	1	2	3.4

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Lock	
■ Surface Finishing	RAL7035w powder coating	■ Hinges	
■ Thickness	1.5 mm	* C: Quarter Turn	

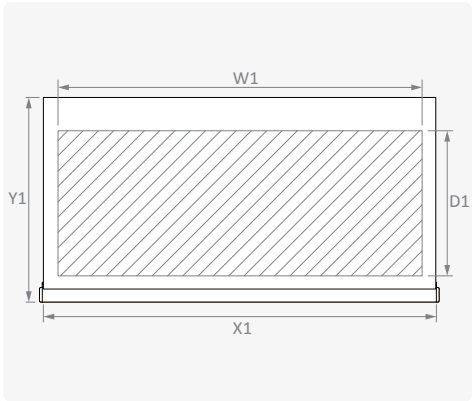


LOWER DOOR										
Reference	Width	Height	Wide	Length	Useful Area		Door	Lock Type	Hinge	Weight
	A	B	X1	Y1	W1	H1				
	mm	mm	mm	mm	mm	mm	pcs	*	pcs	kg
PTE KP0510	500	1065	495	650	320	520	1	C	2	3.8
PTE KP0610	600	1065	595	650	420	520	1	C	2	4.6
PTE KP0710	700	1065	695	650	520	520	1	C	2	5.4

Characteristics		Supply Includes	
■ Material	DIN EN 10130 DC01 CCRS	■ Lock	
■ Surface Finishing	RAL7035w powder coating	■ Hinges	
■ Thickness	1.5 mm	* C: Quarter Turn	

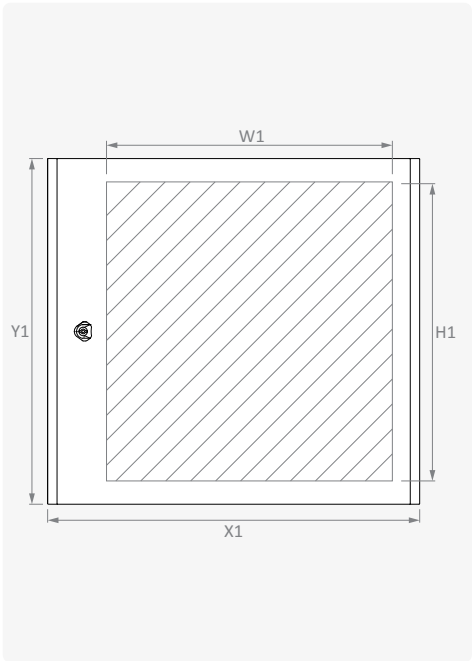

MOUNTING PLATE								
Reference	Width	Height	Wide	Length	Connection		Connection	Weight
	A mm	B mm	X1 mm	Y1 mm	X2 mm	Y2 mm	n pcs	kg
PTE TS 0510	500	1000	400	800	350	750	4	7.8
PTE TS 0610	600	1000	500	800	450	750	4	10.5
PTE TS 0710	700	1000	600	800	550	750	6	27.2

Characteristics		Supply Includes	
■ Material	DIN EN 10327 DX51D+Z galvanized	■ Mounting screws	
■ Thickness	2 mm		

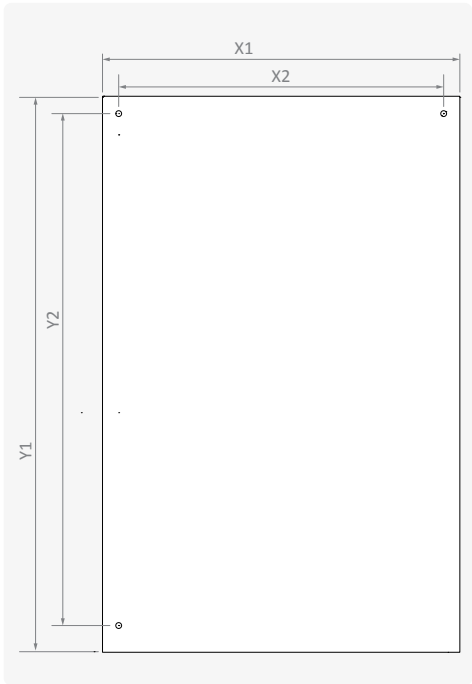


LOCK AND KEYS					
Reference	Lock Type	Material		Description	Key Code
	*	Casing	Cam	Key Type	**
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn; I: Escutcheon
** Keys should be ordered separately.



EARTHING CABLE						
Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm²	mm		pcs/packet	kg/packet
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

