



# TEMPA PANO

*Enclosures engineered...*

*"güvenilir  
çözüm ortağınız,  
"your reliable  
solution partner,"*

**HiT**  
HUMAN INTERFACE TECHNOLOGIES



[www.tempapano.com](http://www.tempapano.com)

**CATALOGUE 10**



#### HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1  
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE  
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49  
e-mail : sales@tempa.com.tr / satis@tempapano.com

#### TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF  
Tel : +44 (0) 1925 811 290  
e-mail : sales@tempapano.co.uk

#### TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE  
Tel : +33 (0) 4 74 42 53 74  
e-mail : contact@tempafrance.fr

#### R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA  
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097  
e-mail : office@rtselectro.ro

#### TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4  
Tel: +359 32 901760 Fax : +359 32 901777  
e-mail : office@tempabg.com



Characteristics

- Material**
- Sheet Steel (EN 10130 DC01 CCRS)
  - Body : 1.5 mm
  - Door : 2 mm
  - Plinth : 2 mm
  - Galvanized Steel (EN 10346 DX51D+Z)
  - Mounting plate : 2 mm
- Surface Finishing**
- RAL7035w powder coating
- IP Rating**
- IP54 (TS 3033, EN 60529)
- Others**
- Foamed-in door PU sealing gasket
  - 150° opening front door
  - Removable lower side panels
  - Depth adjustable mounting plate
  - Facility for double mounting plate

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Special mounting plate




Supply Includes

- Body
- Door and lids
- Mounting plate (Bottom)
- Plinth
- 4 pcs side rails


Complementary Accessories

- Door inside mounting profile
- Plan pocket
- Earthing cable
- Top mounting plate
- Handle


| Width | Height | Depth | Reference | Lower Door | Removable Rear Panel | Useful Area |     |            |     |            |     | Mounting Plate |     | Weight |
|-------|--------|-------|-----------|------------|----------------------|-------------|-----|------------|-----|------------|-----|----------------|-----|--------|
|       |        |       |           |            |                      | Top Lid     |     | Middle Lid |     | Lower Door |     |                |     |        |
|       |        |       |           |            |                      | ↔           | ↕   | ↔          | ↗   | ↔          | ↕   | ↔              | ↕   |        |
| A     | B      | C     |           | pcs        | pcs                  | mm          | mm  | mm         | mm  | mm         | mm  | mm             | mm  |        |
| 600   | 1320   | 400   | PY 061340 | 1          | 1                    | 500         | 265 | 495        | 360 | 420        | 420 | 500            | 800 | 68.6   |
| 800   | 1320   | 400   | PY 081340 | 1          | 1                    | 700         | 265 | 695        | 360 | 620        | 420 | 700            | 800 | 85.3   |
| 1200  | 1320   | 500   | PY 121350 | 2          | 1                    | 1100        | 265 | 1095       | 460 | 420 + 420  | 420 | 1100           | 800 | 122.2  |

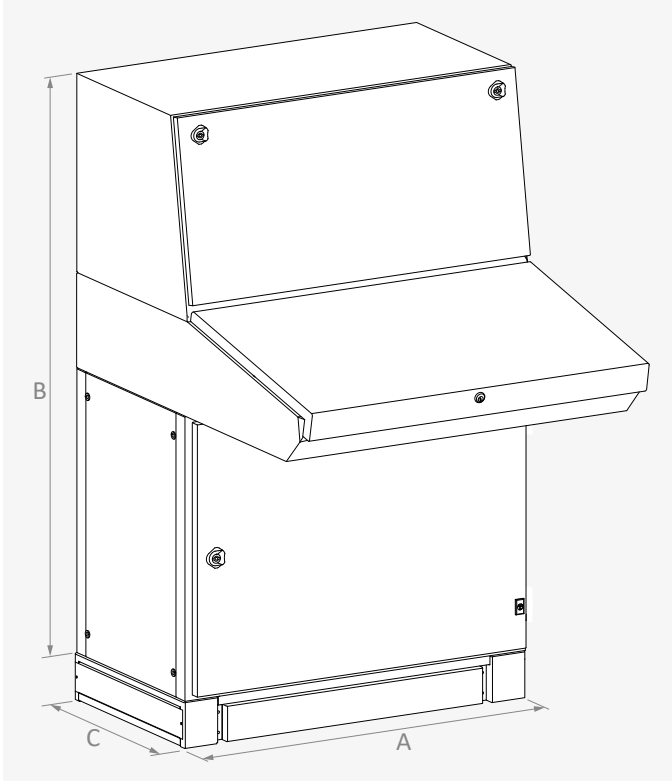


LOWER DOOR USEFUL AREA

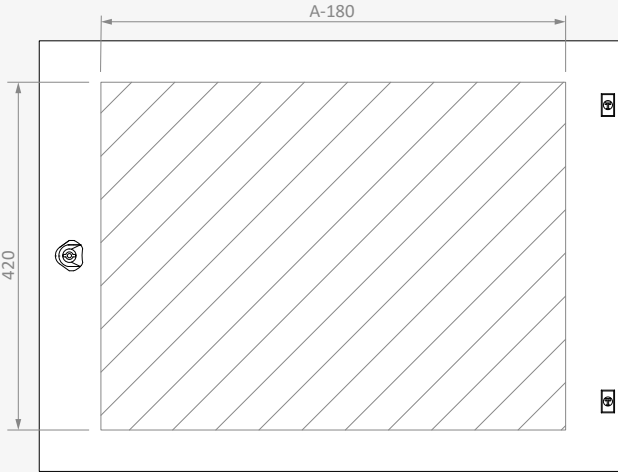


MIDDLE LID USEFUL AREA

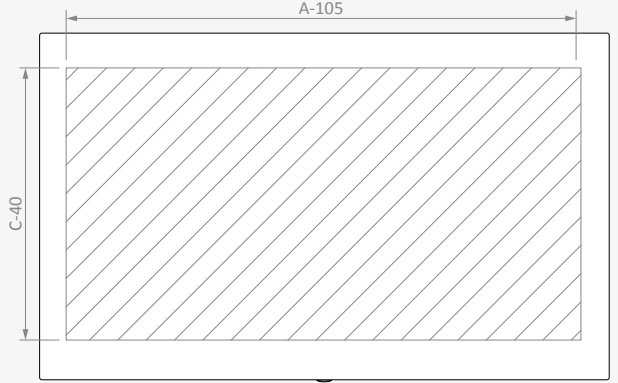


TOP LID USEFUL AREA

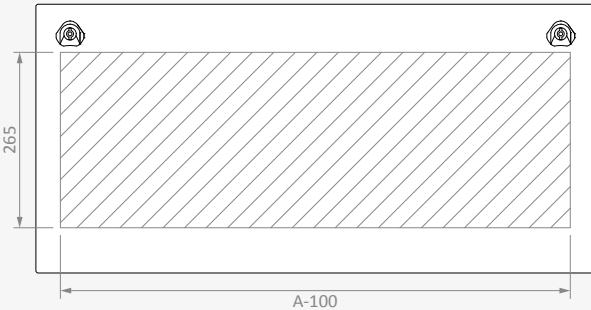

TOP REAR PANEL USEFUL AREA

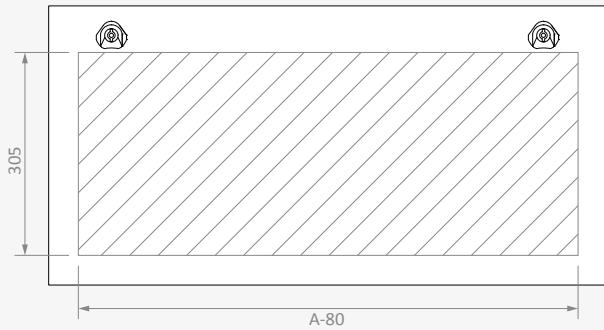


MOUNTING PLATE

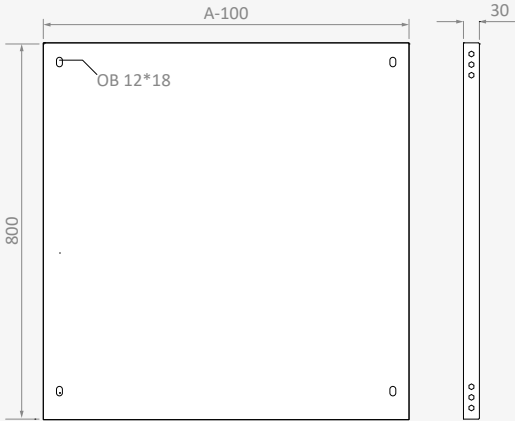


| TOP LID     |       |        |      |        |             |     |     |           |       |        |
|-------------|-------|--------|------|--------|-------------|-----|-----|-----------|-------|--------|
| Reference   | Width | Height | Wide | Length | Useful Area |     | Lid | Lock Type | Hinge | Weight |
|             | A     | B      | X1   | Y1     | W1          | H1  |     |           |       |        |
|             | mm    | mm     | mm   | mm     | mm          | mm  | pcs | *         | pcs   | kg     |
| PY UKKP0642 | 600   | 1320   | 595  | 387    | 500         | 265 | 1   | C         | 2     | 3.8    |
| PY UKKP0842 | 800   | 1320   | 795  | 387    | 700         | 265 | 1   | C         | 2     | 4.9    |
| PY UKKP1242 | 1200  | 1320   | 1195 | 387    | 1100        | 265 | 1   | C         | 2     | 7.3    |

| Characteristics   |  |                         |  |  |  | Supply Includes   |  |  |  |  |
|-------------------|--|-------------------------|--|--|--|-------------------|--|--|--|--|
| Material          |  | DIN EN 10130 DC01 CCRS  |  |  |  | Lock              |  |  |  |  |
| Surface Finishing |  | RAL7035w powder coating |  |  |  | Hinges            |  |  |  |  |
| Thickness         |  | 2 mm                    |  |  |  | * C: Quarter Turn |  |  |  |  |

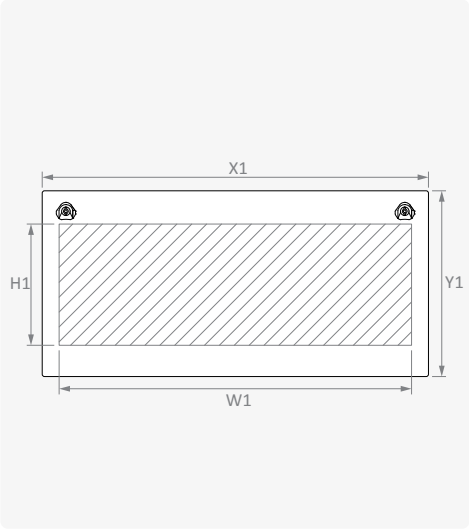

| LOWER DOOR  |       |        |           |        |             |     |      |           |       |        |
|-------------|-------|--------|-----------|--------|-------------|-----|------|-----------|-------|--------|
| Reference   | Width | Height | Wide      | Length | Useful Area |     | Door | Lock Type | Hinge | Weight |
|             | A     | B      | X1        | Y1     | W1          | H1  |      |           |       |        |
|             | mm    | mm     | mm        | mm     | mm          | mm  | pcs  | *         | pcs   | kg     |
| AS KP0606   | 600   | 1320   | 575       | 575    | 420         | 420 | 1    | C         | 2     | 5.2    |
| AS KP0806   | 800   | 1320   | 775       | 575    | 620         | 420 | 1    | C         | 2     | 7.1    |
| PY AKKP1260 | 1200  | 1320   | 587 + 587 | 575    | 420 + 420   | 420 | 2    | C         | 4     | 10.8   |


| Characteristics   |  |                         |  |  |  | Supply Includes   |  |  |  |  |
|-------------------|--|-------------------------|--|--|--|-------------------|--|--|--|--|
| Material          |  | DIN EN 10130 DC01 CCRS  |  |  |  | Lock              |  |  |  |  |
| Surface Finishing |  | RAL7035w powder coating |  |  |  | Hinges            |  |  |  |  |
| Thickness         |  | 2 mm                    |  |  |  | * C: Quarter Turn |  |  |  |  |

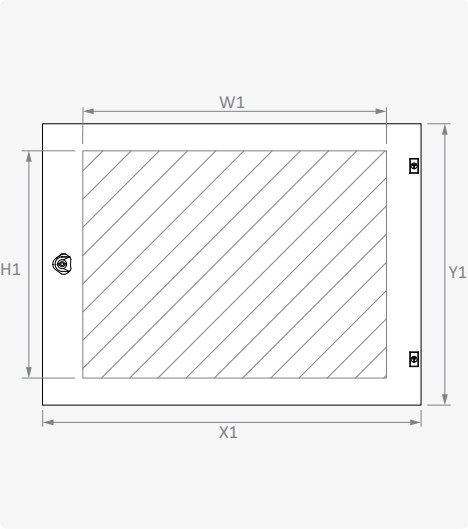

MIDDLE LID

| Reference   | Width |     | Depth | Wide | Length | Useful Area |     | Hinge | Lock Type | Weight |
|-------------|-------|-----|-------|------|--------|-------------|-----|-------|-----------|--------|
|             | A     | C   |       |      |        | W1          | H1  |       |           |        |
|             | mm    | mm  |       |      |        | mm          | mm  |       |           |        |
| PY OKKP0620 | 600   | 400 |       | 595  | 500    | 495         | 360 | 2     | C         | 4.7    |
| PY OKKP0820 | 800   | 400 |       | 795  | 500    | 695         | 360 | 2     | C         | 6.3    |
| PY OKKP1220 | 1200  | 500 |       | 1195 | 500    | 1095        | 460 | 2     | C         | 9.5    |


| Characteristics   |  |                         |  |  |  | Supply Includes   |  |  |  |  |
|-------------------|--|-------------------------|--|--|--|-------------------|--|--|--|--|
| Material          |  | DIN EN 10130 DC01 CCRS  |  |  |  | Lock              |  |  |  |  |
| Surface Finishing |  | RAL7035w powder coating |  |  |  | Hinges            |  |  |  |  |
| Thickness         |  | 2 mm                    |  |  |  | * C: Quarter Turn |  |  |  |  |

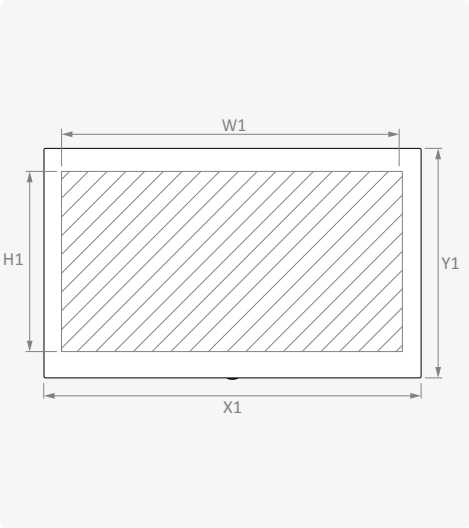

TOP REAR PANEL

| Reference   | Width |      | Height | Wide | Length | Useful Area |     | Lock | Lock Type | Weight |
|-------------|-------|------|--------|------|--------|-------------|-----|------|-----------|--------|
|             | A     | B    |        |      |        | W1          | H1  |      |           |        |
|             | mm    | mm   |        |      |        | mm          | mm  |      |           |        |
| PY UKST0642 | 600   | 1320 |        | 556  | 375    | 520         | 305 | 2    | C         | 3.3    |
| PY UKST0842 | 800   | 1320 |        | 756  | 375    | 720         | 305 | 2    | C         | 4.5    |
| PY UKST1242 | 1200  | 1320 |        | 1156 | 375    | 1120        | 305 | 2    | C         | 6.9    |

| Characteristics   |  |                         |  |  |  | Supply Includes   |  |  |  |  |
|-------------------|--|-------------------------|--|--|--|-------------------|--|--|--|--|
| Material          |  | DIN EN 10130 DC01 CCRS  |  |  |  | Lock              |  |  |  |  |
| Surface Finishing |  | RAL7035w powder coating |  |  |  | * C: Quarter Turn |  |  |  |  |
| Thickness         |  | 2 mm                    |  |  |  |                   |  |  |  |  |

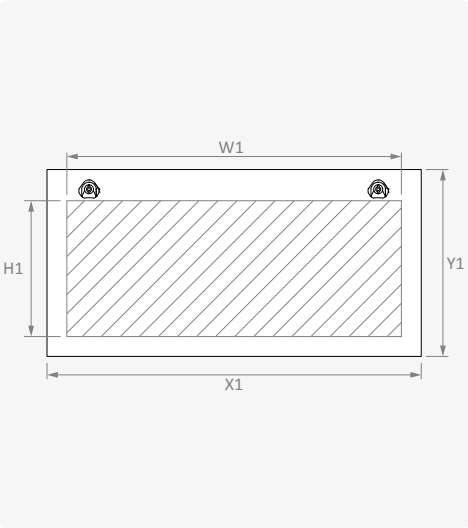

## MOUNTING PLATE

| Reference  | Width      | Height | Wide | Length | Connection |     |      |     | Connection | Weight |
|------------|------------|--------|------|--------|------------|-----|------|-----|------------|--------|
|            | A          | B      | X1   | Y1     | X2         | Y2  | X3   | Y3  | n          |        |
|            | mm         | mm     | mm   | mm     | mm         | mm  | mm   | mm  | pcs        | kg     |
|            | AS TS 0606 | 600    | 600  | 500    | 500        | 441 | 380  | 420 | -          | 4      |
| AS TS 0806 | 800        | 600    | 700  | 500    | 641        | 380 | 620  | -   | 4          | 6.8    |
| AS TS 1206 | 1200       | 600    | 1100 | 500    | 1041       | 380 | 1020 | 800 | 4          | 16.4   |

## Characteristics

|           |                                 |
|-----------|---------------------------------|
| Material  | DIN EN 10327 DX51D+Z galvanized |
| Thickness | 2 mm                            |

## Supply Includes

|                                      |
|--------------------------------------|
| Mounting screws                      |
| Carriage slide support and fasteners |



## PARTIAL MOUNTING PLATE


| Reference<br>* | Width | Length |     |     | Connection |     | Weight |
|----------------|-------|--------|-----|-----|------------|-----|--------|
|                | A     | X1     | Y1  | Y3  | X2         | Y2  |        |
|                | mm    | mm     | mm  | mm  | mm         | mm  | kg     |
| AS TSK 0636    | 600   | 512    | 360 | 330 | 495        | 340 | 3,3    |
| AS TSK 0836    | 800   | 712    | 360 | 330 | 695        | 340 | 4,7    |
| AS TSK 1236    | 1200  | 1112   | 360 | 330 | 1095       | 340 | 7,3    |

## Characteristics

|           |                                 |
|-----------|---------------------------------|
| Material  | DIN EN 10327 DX51D+Z galvanized |
| Thickness | 2 mm                            |


## Supply Includes

|                 |
|-----------------|
| Mounting screws |
|-----------------|

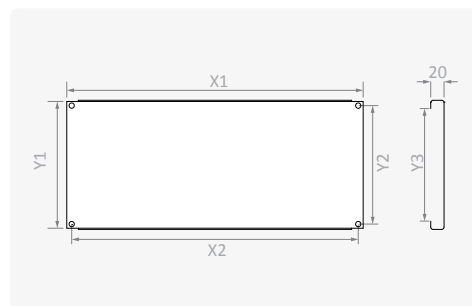


## SIDE RAILS

| Reference | Depth |     | Length |     | Connection |    | Weight | Characteristics |                                 |
|-----------|-------|-----|--------|-----|------------|----|--------|-----------------|---------------------------------|
|           | C     | Z1  | Z2     | Z3  | Z2         | Z3 |        | Material        | DIN EN 10327 DX51D+Z galvanized |
|           | mm    | mm  | mm     | mm  | mm         | mm |        | Thickness       | 1.5 mm                          |
| AS SR 040 | 400   | 224 | 211    | 192 |            |    | 0.2    | Supply Includes |                                 |
| AS SR 050 | 500   | 324 | 311    | 292 |            |    | 0.3    |                 |                                 |
| AS SR 060 | 600   | 424 | 411    | 392 |            |    | 0.4    |                 |                                 |

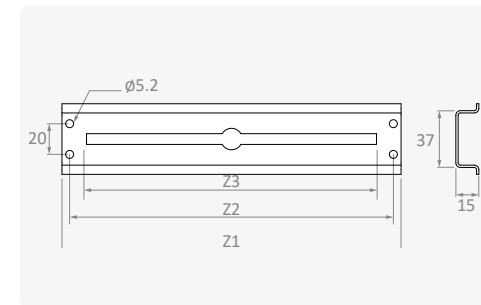

## PLAN POCKETS


| Reference | Width          |    | Length |    |    | Weight | Characteristics   |                         |
|-----------|----------------|----|--------|----|----|--------|-------------------|-------------------------|
|           | A              | X1 | Y1     | Z1 | Z1 |        | Material          | DIN EN 10130 DC01 CCRS  |
|           | mm             | mm | mm     | mm | mm |        | Surface Finishing | RAL7035w powder coating |
| AS PJ 040 | All Dimensions | A4 | 200    | 30 |    | 0.4    | Thickness         | 1.5 mm                  |
| AS PJ 060 | 600/1200       | A3 | 240    | 60 |    | 1.9    | Supply Includes   |                         |
| AS PJ 080 | 800            | A3 | 240    | 60 |    | 2.6    |                   |                         |

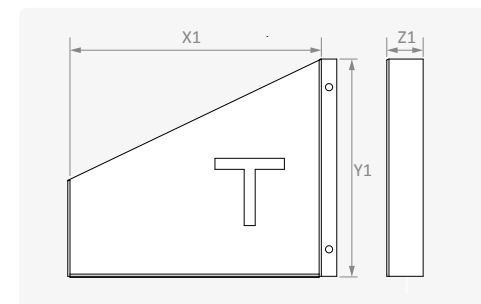

## LOCK AND KEYS


| Reference       | Lock Type | Material  |           | Description     | Key Code  |
|-----------------|-----------|-----------|-----------|-----------------|-----------|
|                 |           | Casing    | Cam       | Key Type        |           |
| KIATKY2535796T1 | C         | Polyamide | Polyamide | 5 mm Double-bit | KIAN 0100 |


\* C: Quarter Turn; I: Escutcheon  
 \*\* Keys should be ordered separately.

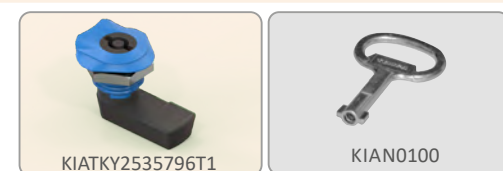

## EARTHING CABLE

| Reference      | Material                                | Cross Section | Length | Connection | Packet     | Weight |
|----------------|-----------------------------------------|---------------|--------|------------|------------|--------|
|                |                                         | mm²           | mm     |            | pcs/packet |        |
| KB TP 16092750 | Nickel plated, braided copper conductor | 16            | 275    | M8-M8      | 50         | 0.2    |
| KB TP 16093500 |                                         | 16            | 320    | M8-M8      | 50         | 0.2    |

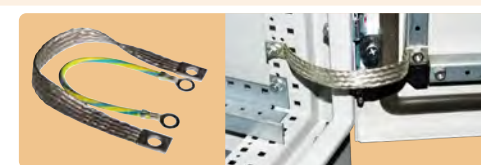



# TEMPA PANO

*Enclosures engineered...*



*“your reliable  
solution partner,”*

