



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Stainless Steel 304L (EN 10088 1.4307)

- Frame : 1.5 mm
- Panel : 1.2 mm
- Door : 1.5 mm
- Plinth : 1.5 mm

Galvanized Steel (EN 10346 DX51D+Z)

- Mounting plate : 2 mm

Surface Finishing

- Scotch-brite brushed

IP Rating

- IP55 (TS 3033, EN 60529)

Others

- Welded frame construction
- Foamed-in door/rear panel PU sealing gasket
- Swing-handle polyamide lock (3 points locking, 333 key)
- Door and panel options for rear side
- Multiple mounting plate possibility
- The modular construction can be join
- Removable side panels
- Plinth and cover options

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Flat pack options
- 316L Grade SS



Supply Includes


- Front and rear frame
- Door (Select ≈ **K**)
- Rear panel (Select ≈ **K**)
- Mounting plate (Option ≈ **M**)
- Plinth (Option ≈ **P**)
- Top cover
- 4/6 pcs side rails







Complementary Accessories

- Side panels
- Eye bolt
- Rain canopy
- Door inside mounting profile
- Short mounting plate
- Partial mounting plate
- Infill mounting plate
- Carriage depth slide and support
- Partition profile
- L, U and Z profiles
- L and Z brackets
- Busbar & depth profile
- Ladder busbar profile
- Joining set
- Adjustable / pull out perforated shelf
- Plan pocket
- Plastic cover plate
- Earthing cable
- Bottom cover plate

Width	Height	Depth	Reference	Door	Hinge	Glazed Door
A	B	C		pcs	pcs	Y / N
mm	mm	mm				
400	600	400	SSAS xxx 040640	1	2	✓
		500	SSAS xxx 040650	1	2	✓
		600	SSAS xxx 040660	1	2	✓
	800	400	SSAS xxx 040840	1	2	✓
		500	SSAS xxx 040850	1	2	✓
		600	SSAS xxx 040860	1	2	✓
	1000	400	SSAS xxx 041040	1	2	✓
		500	SSAS xxx 041050	1	2	✓
		600	SSAS xxx 041060	1	2	✓
	1200	400	SSAS xxx 041240	1	2	✓
		500	SSAS xxx 041250	1	2	✓
		600	SSAS xxx 041260	1	2	✓
	1400	400	SSAS xxx 041440	1	3	✓
		500	SSAS xxx 041450	1	3	✓
		600	SSAS xxx 041460	1	3	✓
	1600	400	SSAS xxx 041640	1	3	✓
		500	SSAS xxx 041650	1	3	✓
		600	SSAS xxx 041660	1	3	✓
	1800	400	SSAS xxx 041840	1	3	✓
		500	SSAS xxx 041850	1	3	✓
		600	SSAS xxx 041860	1	3	✓
	2000	800	SSAS xxx 041880	1	3	✓
		400	SSAS xxx 042040	1	3	✓
		500	SSAS xxx 042050	1	3	✓
		600	SSAS xxx 042060	1	3	✓
		800	SSAS xxx 042080	1	3	✓
600	600	400	SSAS xxx 060640	1	2	✓
		500	SSAS xxx 060650	1	2	✓
		600	SSAS xxx 060660	1	2	✓
	800	400	SSAS xxx 060840	1	2	✓
		500	SSAS xxx 060850	1	2	✓
		600	SSAS xxx 060860	1	2	✓
	1000	400	SSAS xxx 061040	1	2	✓
		500	SSAS xxx 061050	1	2	✓
		600	SSAS xxx 061060	1	2	✓
	1200	400	SSAS xxx 061240	1	2	✓
		500	SSAS xxx 061250	1	2	✓
		600	SSAS xxx 061260	1	2	✓
	1400	400	SSAS xxx 061440	1	3	✓
		500	SSAS xxx 061450	1	3	✓
		600	SSAS xxx 061460	1	3	✓
	1600	400	SSAS xxx 061640	1	3	✓
		500	SSAS xxx 061650	1	3	✓
		600	SSAS xxx 061660	1	3	✓
	1800	400	SSAS xxx 061840	1	3	✓
		500	SSAS xxx 061850	1	3	✓
		600	SSAS xxx 061860	1	3	✓
	2000	800	SSAS xxx 061880	1	3	✓
		400	SSAS xxx 062040	1	3	✓
		500	SSAS xxx 062050	1	3	✓
		600	SSAS xxx 062060	1	3	✓
		800	SSAS xxx 062080	1	3	✓
800	600	400	SSAS xxx 040640	1	2	✓
		500	SSAS xxx 040650	1	2	✓
		600	SSAS xxx 040660	1	2	✓
	800	400	SSAS xxx 040840	1	2	✓
		500	SSAS xxx 040850	1	2	✓
		600	SSAS xxx 040860	1	2	✓
	1000	400	SSAS xxx 041040	1	2	✓
		500	SSAS xxx 041050	1	2	✓
		600	SSAS xxx 041060	1	2	✓

Width	Height	Depth	Reference	Door	Hinge	Glazed Door
A	B	C		pcs	pcs	Y / N
mm	mm	mm				
800	1200	400	SSAS xxx 081240	1	2	✓
		500	SSAS xxx 081250	1	2	✓
		600	SSAS xxx 081260	1	2	✓
	1400	400	SSAS xxx 081440	1	3	✓
		500	SSAS xxx 081450	1	3	✓
		600	SSAS xxx 081460	1	3	✓
	1600	400	SSAS xxx 081640	1	3	✓
		500	SSAS xxx 081650	1	3	✓
		600	SSAS xxx 081660	1	3	✓
	1800	400	SSAS xxx 081840	1	3	✓
		500	SSAS xxx 081850	1	3	✓
		600	SSAS xxx 081860	1	3	✓
	2000	800	SSAS xxx 081880	1	3	✓
		400	SSAS xxx 082040	1	3	✓
		500	SSAS xxx 082050	1	3	✓
		600	SSAS xxx 082060	1	3	✓
		800	SSAS xxx 082080	1	3	✓
1000	1800	400	SSAS xxx 101840	2	3+3	-
		500	SSAS xxx 101850	2	3+3	-
		600	SSAS xxx 101860	2	3+3	-
		800	SSAS xxx 101880	2	3+3	-
	2000	400	SSAS xxx 102040	2	3+3	-
		500	SSAS xxx 102050	2	3+3	-
		600	SSAS xxx 102060	2	3+3	-
	1200	800	SSAS xxx 102080	2	3+3	-
		400	SSAS xxx 121840	2	3+3	-
		500	SSAS xxx 121850	2	3+3	-
		600	SSAS xxx 121860	2	3+3	-
	1800	800	SSAS xxx 121880	2	3+3	-
		400	SSAS xxx 122040	2	3+3	-
		500	SSAS xxx 122050	2	3+3	-
		600	SSAS xxx 122060	2	3+3	-
	1400	800	SSAS xxx 122080	2	3+3	-
		400	SSAS xxx 141840	2	3+3	-
		500	SSAS xxx 141850	2	3+3	-
		600	SSAS xxx 141860	2	3+3	-
	2000	800	SSAS xxx 141880	2	3+3	-
		400	SSAS xxx 142040	2	3+3	-
		500	SSAS xxx 142050	2	3+3	-
		600	SSAS xxx 142060	2	3+3	-
		800	SSAS xxx 142080	2	3+3	-

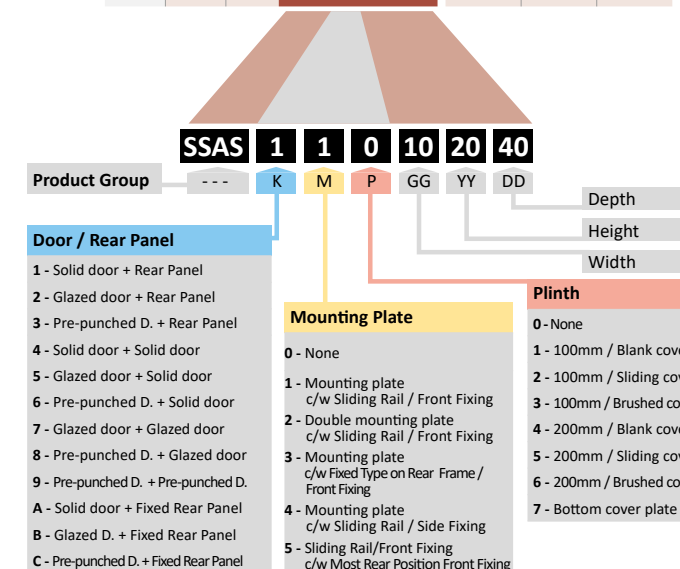

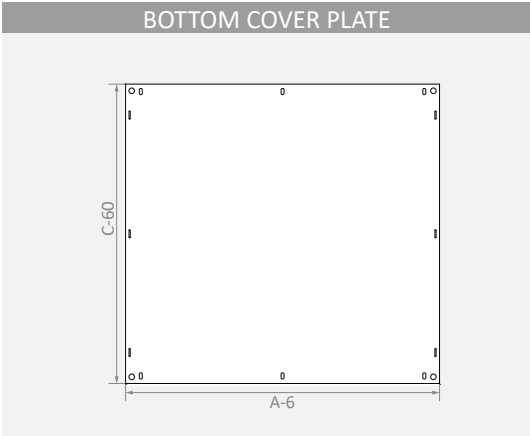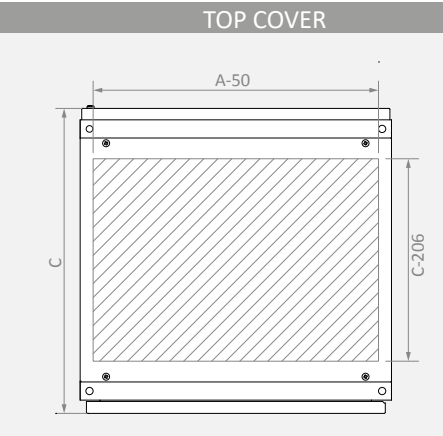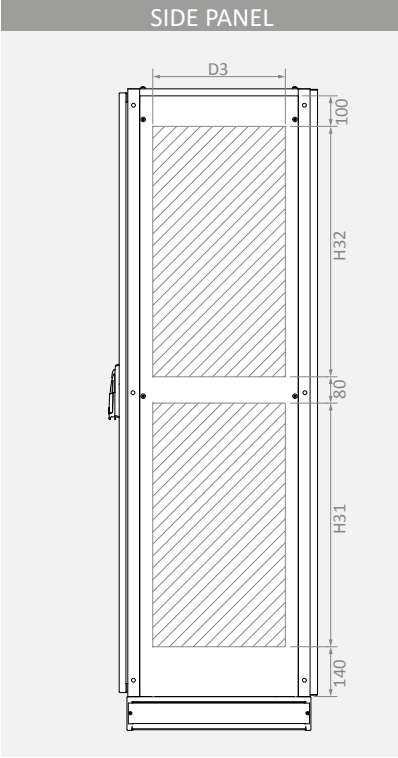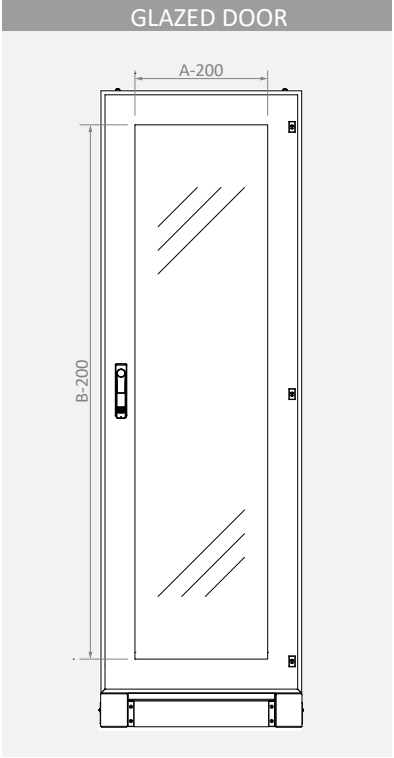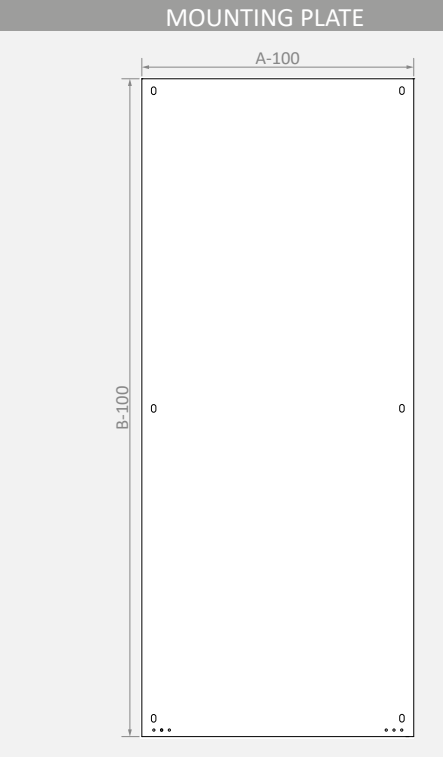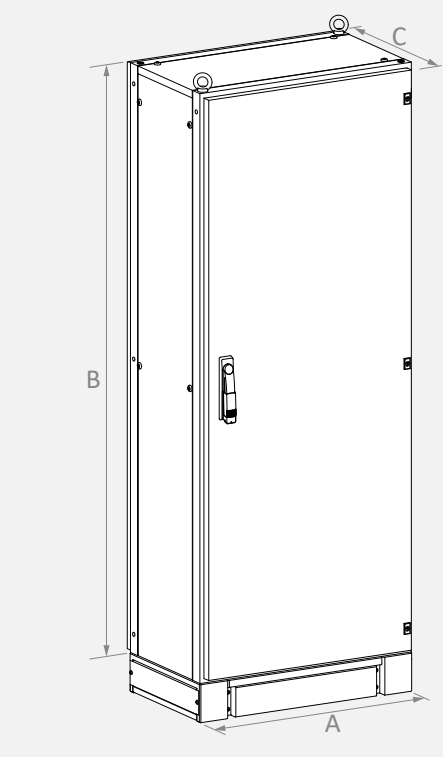

Width A mm	Height B mm	Reference	Solid Door	Useful Area		Glazed Door	Apparent Area		Mounting Plate	Dimensions	
				↔ mm	↕ mm		↔ mm	↕ mm		↔ mm	↕ mm
400	600	SSAS xxx 0406**	SSAS KP 0406	220	420	SSAS KPX 0406	200	400	AS TS 0406	300	500
	800	SSAS xxx 0408**	SSAS KP 0408	220	620	SSAS KPX 0408	200	600	AS TS 0408	300	700
	1000	SSAS xxx 0410**	SSAS KP 0410	220	820	SSAS KPX 0410	200	800	AS TS 0410	300	900
	1200	SSAS xxx 0412**	SSAS KP 0412	220	1020	SSAS KPX 0412	200	1000	AS TS 0412	300	1100
	1400	SSAS xxx 0414**	SSAS KP 0414	220	1220	SSAS KPX 0414	200	1200	AS TS 0414	300	1300
	1600	SSAS xxx 0416**	SSAS KP 0416	220	1420	SSAS KPX 0416	200	1400	AS TS 0416	300	1500
	1800	SSAS xxx 0418**	SSAS KP 0418	220	1620	SSAS KPX 0418	200	1600	AS TS 0418	300	1700
600	2000	SSAS xxx 0420**	SSAS KP 0420	220	1820	SSAS KPX 0420	200	1800	AS TS 0420	300	1900
	600	SSAS xxx 0606**	SSAS KP 0606	420	420	SSAS KPX 0606	400	400	AS TS 0606	500	500
	800	SSAS xxx 0608**	SSAS KP 0608	420	620	SSAS KPX 0608	400	600	AS TS 0608	500	700
	1000	SSAS xxx 0610**	SSAS KP 0610	420	820	SSAS KPX 0610	400	800	AS TS 0610	500	900
	1200	SSAS xxx 0612**	SSAS KP 0612	420	1020	SSAS KPX 0612	400	1000	AS TS 0612	500	1100
	1400	SSAS xxx 0614**	SSAS KP 0614	420	1220	SSAS KPX 0614	400	1200	AS TS 0614	500	1300
	1600	SSAS xxx 0616**	SSAS KP 0616	420	1420	SSAS KPX 0616	400	1400	AS TS 0616	500	1500
800	1800	SSAS xxx 0618**	SSAS KP 0618	420	1620	SSAS KPX 0618	400	1600	AS TS 0618	500	1700
	2000	SSAS xxx 0620**	SSAS KP 0620	420	1820	SSAS KPX 0620	400	1800	AS TS 0620	500	1900
	600	SSAS xxx 0806**	SSAS KP 0806	620	420	SSAS KPX 0806	600	400	AS TS 0806	700	500
	800	SSAS xxx 0808**	SSAS KP 0808	620	620	SSAS KPX 0808	600	600	AS TS 0808	700	700
	1000	SSAS xxx 0810**	SSAS KP 0810	620	820	SSAS KPX 0810	600	800	AS TS 0810	700	900
	1200	SSAS xxx 0812**	SSAS KP 0812	620	1020	SSAS KPX 0812	600	1000	AS TS 0812	700	1100
	1400	SSAS xxx 0814**	SSAS KP 0814	620	1220	SSAS KPX 0814	600	1200	AS TS 0814	700	1300
1000	1600	SSAS xxx 0816**	SSAS KP 0816	620	1420	SSAS KPX 0816	600	1400	AS TS 0816	700	1500
	1800	SSAS xxx 0818**	SSAS KP 0818	620	1620	SSAS KPX 0818	600	1600	AS TS 0818	700	1700
	2000	SSAS xxx 0820**	SSAS KP 0820	620	1820	SSAS KPX 0820	600	1800	AS TS 0820	700	1900
	1800	SSAS xxx 1018**	SSAS KP 1018	320 + 320	1620	-- --	-- --	-- --	AS TS 1018	900	1700
	2000	SSAS xxx 1020**	SSAS KP 1020	320 + 320	1820	-- --	-- --	-- --	AS TS 1020	900	1900
	1800	SSAS xxx 1218**	SSAS KP 1218	420 + 420	1620	-- --	-- --	-- --	AS TS 1218	1100	1700
	2000	SSAS xxx 1220**	SSAS KP 1220	420 + 420	1820	-- --	-- --	-- --	AS TS 1220	1100	1900
1400	1800	SSAS xxx 1418**	SSAS KP 1418	520 + 520	1620	-- --	-- --	-- --	AS TS 1418	1300	1700
	2000	SSAS xxx 1420**	SSAS KP 1420	520 + 520	1820	-- --	-- --	-- --	AS TS 1420	1300	1900


Height B mm	Depth C mm	Reference	Side Panel	Useful Area			Width A mm	Depth C mm	Reference	Top Cover	Useful Area		Bottom Cover Plate	Dimensions	
				D3 mm	H31 mm	H32 mm					↔ mm	↕ mm		↔ mm	↕ mm
600	400	SSAS xxx **0640	SSAS YS 0640	194	340	-	400	400	SSAS xxx 04**40	SSAS TAV 04040	350	194	SSAS BS 04040	394	340
	500	SSAS xxx **0650	SSAS YS 0650	294	340	-		500	SSAS xxx 04**50	SSAS TAV 04050	350	294	SSAS BS 04050	394	440
	600	SSAS xxx **0660	SSAS YS 0660	394	340	-		600	SSAS xxx 04**60	SSAS TAV 04060	350	394	SSAS BS 04060	394	540
800	400	SSAS xxx **0840	SSAS YS 0840	194	540	-	600	800	SSAS xxx 04**80	SSAS TAV 04080	350	594	SSAS BS 04080	394	740
	500	SSAS xxx **0850	SSAS YS 0850	294	540	-		400	SSAS xxx 06**40	SSAS TAV 06040	550	194	SSAS BS 06040	594	340
	600	SSAS xxx **0860	SSAS YS 0860	394	540	-		500	SSAS xxx 06**50	SSAS TAV 06050	550	294	SSAS BS 06050	594	440
1000	400	SSAS xxx **1040	SSAS YS 1040	194	740	-	800	600	SSAS xxx 06**60	SSAS TAV 06060	550	394	SSAS BS 06060	594	540
	500	SSAS xxx **1050	SSAS YS 1050	294	740	-		800	SSAS xxx 06**80	SSAS TAV 06080	550	594	SSAS BS 06080	594	740
	600	SSAS xxx **1060	SSAS YS 1060	394	740	-		400	SSAS xxx 08**40	SSAS TAV 08040	750	194	SSAS BS 08040	794	340
1200	400	SSAS xxx **1240	SSAS YS 1240	194	940	-	1000	500	SSAS xxx 08**50	SSAS TAV 08050	750	294	SSAS BS 08050	794	440
	500	SSAS xxx **1250	SSAS YS 1250	294	940	-		600	SSAS xxx 08**60	SSAS TAV 08060	750	394	SSAS BS 08060	794	540
	600	SSAS xxx **1260	SSAS YS 1260	394	940	-		800	SSAS xxx 08**80	SSAS TAV 08080	750	594	SSAS BS 08080	794	740
1400	400	SSAS xxx **1440	SSAS YS 1440	194	520	540	1200	400	SSAS xxx 10**40	SSAS TAV 10040	950	194	SSAS BS 10040	994	340
	500	SSAS xxx **1450	SSAS YS 1450	294	520	540		500	SSAS xxx 10**50	SSAS TAV 10050	950	294	SSAS BS 10050	994	440
	600	SSAS xxx **1460	SSAS YS 1460	394	520	540		600	SSAS xxx 10**60	SSAS TAV 10060	950	394	SSAS BS 10060	994	540
1600	400	SSAS xxx **1640	SSAS YS 1640	194	640	620	1400	800	SSAS xxx 10**80	SSAS TAV 10080	950	594	SSAS BS 10080	994	740
	500	SSAS xxx **1650	SSAS YS 1650	294	640	620		400	SSAS xxx 12**40	SSAS TAV 12040	1150	194	SSAS BS 12040	1194	340
	600	SSAS xxx **1660	SSAS YS 1660	394	640	620		500	SSAS xxx 12**50	SSAS TAV 12050	1150	294	SSAS BS 12050	1194	440
1800	400	SSAS xxx **1840	SSAS YS 1840	194	720	740	1600	600	SSAS xxx 12**60	SSAS TAV 12060	1150	394	SSAS BS 12060	1194	540
	500	SSAS xxx **1850	SSAS YS 1850	294	720	740		800	SSAS xxx 12**80	SSAS TAV 12080	1150	594	SSAS BS 12080	1194	740
	600	SSAS xxx **1860	SSAS YS 1860	394	720	740		400	SSAS xxx 14**40	SSAS TAV 14040	1350	194	SSAS BS 14040	1394	340
2000	800	SSAS xxx **1880	SSAS YS 1880	594	720	740	1800	500	SSAS xxx 14**50	SSAS TAV 14050	1350	294	SSAS BS 14050	1394	440
	400	SSAS xxx **2040	SSAS YS 2040	194	840	820		600	SSAS xxx 14**60	SSAS TAV 14060	1350	394	SSAS BS 14060	1394	540
	500	SSAS xxx **2050	SSAS YS 2050	294	840	820		800	SSAS xxx 14**80	SSAS TAV 14080	1350	594	SSAS BS 14080	1394	740
2000	600	SSAS xxx **2060	SSAS YS 2060	394	840	820	2000	400	SSAS xxx 14**80	SSAS TAV 14080	1350	594	SSAS BS 14080	1394	740
	800	SSAS xxx **2080	SSAS YS 2080	594	840	820		600	SSAS xxx 14**80	SSAS TAV 14080	1350	594	SSAS BS 14080	1394	740

SOLID DOOR

Reference	Width		Height		Wide		Length		Useful Area				Door	Lock Type	Hinge	Weight
	A	B			X1		Y1		W1	W11*	W12*	H1				
	mm	mm			mm		mm		mm	mm	mm	mm				
SSAS KP 0406	400	600			391		588		220	-	-	420	1	I	2	3.2
SSAS KP 0408	400	800			391		788		220	-	-	620	1	I	2	4.2
SSAS KP 0410	400	1000			391		988		220	-	-	820	1	I	2	5.2
SSAS KP 0412	400	1200			391		1188		220	-	-	1020	1	I	2	6.3
SSAS KP 0414	400	1400			391		1388		220	-	-	1220	1	I	3	7.3
SSAS KP 0416	400	1600			391		1588		220	-	-	1420	1	I	3	8.3
SSAS KP 0418	400	1800			391		1788		220	-	-	1620	1	I	3	9.3
SSAS KP 0420	400	2000			391		1988		220	-	-	1820	1	I	3	10.4
SSAS KP 0606	600	600			591		588		420	-	-	420	1	I	2	4.7
SSAS KP 0608	600	800			591		788		420	-	-	620	1	I	2	6.2
SSAS KP 0610	600	1000			591		988		420	-	-	820	1	I	2	7.7
SSAS KP 0612	600	1200			591		1188		420	-	-	1020	1	I	2	9.2
SSAS KP 0614	600	1400			591		1388		420	-	-	1220	1	I	3	10.7
SSAS KP 0616	600	1600			591		1588		420	-	-	1420	1	I	3	12.2
SSAS KP 0618	600	1800			591		1788		420	-	-	1620	1	I	3	13.7
SSAS KP 0620	600	2000			591		1988		420	-	-	1820	1	I	3	15.2
SSAS KP 0806	800	600			791		588		620	-	-	420	1	I	2	6.2
SSAS KP 0808	800	800			791		788		620	-	-	620	1	I	2	8.2
SSAS KP 0810	800	1000			791		988		620	-	-	820	1	I	2	10.2
SSAS KP 0812	800	1200			791		1188		620	-	-	1020	1	I	2	12.2
SSAS KP 0814	800	1400			791		1388		620	-	-	1220	1	I	3	14.1
SSAS KP 0816	800	1600			791		1588		620	-	-	1420	1	I	3	16.1
SSAS KP 0818	800	1800			791		1788		620	-	-	1620	1	I	3	18.1
SSAS KP 0820	800	2000			791		1988		620	-	-	1820	1	I	3	20.1
SSAS KP 1018	1000	1800			991		1788		-	320	320	1620	2	I	3+3	23.8
SSAS KP 1020	1000	2000			991		1988		-	320	320	1820	2	I	3+3	26.4
SSAS KP 1218	1200	1800			1191		1788		-	420	420	1620	2	I	3+3	28.1
SSAS KP 1220	1200	2000			1191		1988		-	420	420	1820	2	I	3+3	31.2
SSAS KP 1418	1400	1800			1391		1788		-	520	520	1620	2	I	3+3	32.5
SSAS KP 1420	1400	2000			1391		1988		-	520	520	1820	2	I	3+3	36.2

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.5 mm

Supply Includes	
■ Lock	
■ Hinges	
★ I: Rod-latch	

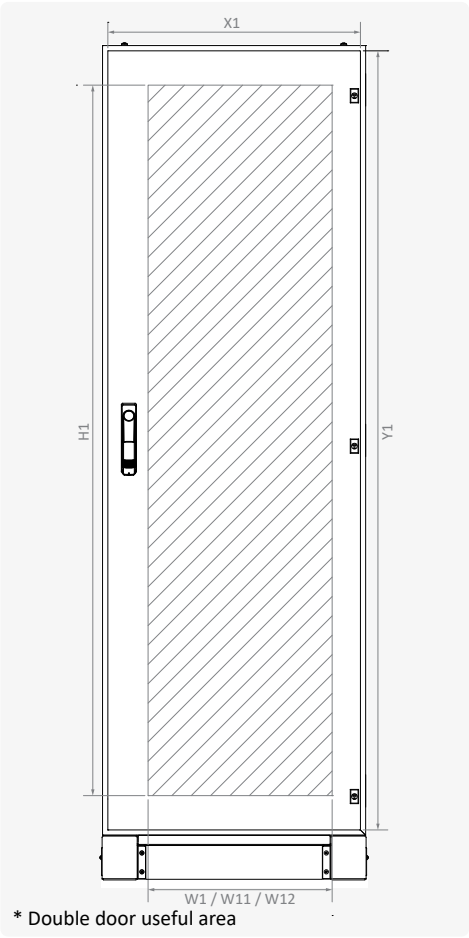


GLAZED DOOR

Reference	Width		Height		Wide		Length		Apparent Area		Door	Lock Type	Hinge	Weight
	A	B			X1		Y1		W1	H1				
	mm	mm			mm		mm		mm	mm				
SSAS KPX 0406	400	600			391		588		200	400	1	I	2	2.2
SSAS KPX 0408	400	800			391		788		200	600	1	I	2	2.8
SSAS KPX 0410	400	1000			391		988		200	800	1	I	2	3.4
SSAS KPX 0412	400	1200			391		1188		200	1000	1	I	2	4.0
SSAS KPX 0414	400	1400			391		1388		200	1200	1	I	3	4.7
SSAS KPX 0416	400	1600			391		1588		200	1400	1	I	3	5.3
SSAS KPX 0418	400	1800			391		1788		200	1600	1	I	3	5.9
SSAS KPX 0420	400	2000			391		1988		200	1800	1	I	3	6.5
SSAS KPX 0606	600	600			591		588		400	400	1	I	2	3.0
SSAS KPX 0608	600	800			591		788		400	600	1	I	2	3.8
SSAS KPX 0610	600	1000			591		988		400	800	1	I	2	4.6
SSAS KPX 0612	600	1200			591		1188		400	1000	1	I	2	5.4
SSAS KPX 0614	600	1400			591		1388		400	1200	1	I	3	6.2
SSAS KPX 0616	600	1600			591		1588		400	1400	1	I	3	7.0
SSAS KPX 0618	600	1800			591		1788		400	1600	1	I	3	7.8
SSAS KPX 0620	600	2000			591		1988		400	1800	1	I	3	8.6
SSAS KPX 0806	800	600			791		588		600	400	1	I	2	3.8
SSAS KPX 0808	800	800			791		788		600	600	1	I	2	4.8
SSAS KPX 0810	800	1000			791		988		600	800	1	I	2	5.7
SSAS KPX 0812	800	1200			791		1188		600	1000	1	I	2	6.7
SSAS KPX 0814	800	1400			791		1388		600	1200	1	I	3	7.7
SSAS KPX 0816	800	1600			791		1588		600	1400	1	I	3	8.7
SSAS KPX 0818	800	1800			791		1788		600	1600	1	I	3	9.7
SSAS KPX 0820	800	2000			791		1988		600	1800	1	I	3	10.7

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307) / 4 mm tempered glass
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.5 mm


Supply Includes	
■ Lock	
■ Hinges	
★ I: Rod-latch	

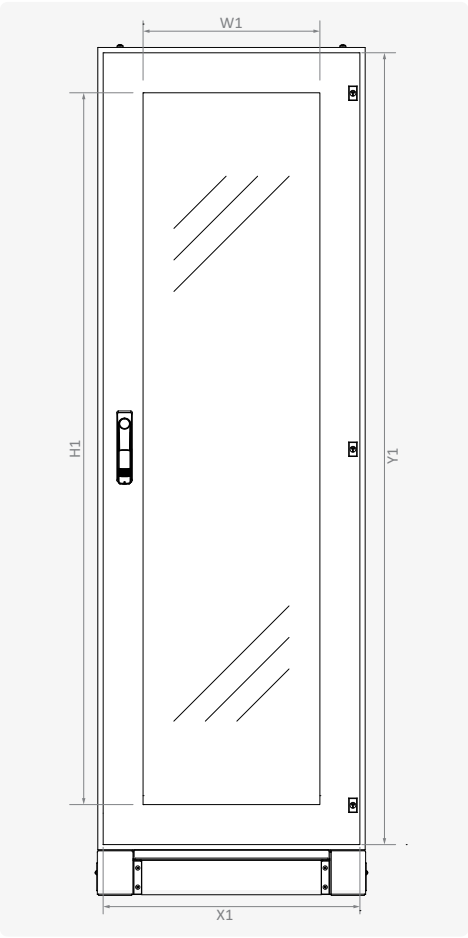

REAR PANEL							
Reference	Width	Height	Wide	Length	Useful Area		Weight
	A	B	X1	Y1	W1	H1	
	mm	mm	mm	mm	mm	mm	
SSAS ST 0406	400	600	394	594	300	500	2.6
SSAS ST 0408	400	800	394	794	300	700	3.4
SSAS ST 0410	400	1000	394	994	300	900	4.2
SSAS ST 0412	400	1200	394	1194	300	1100	5.0
SSAS ST 0414	400	1400	394	1394	300	1300	5.8
SSAS ST 0416	400	1600	394	1594	300	1500	6.6
SSAS ST 0418	400	1800	394	1794	300	1700	7.5
SSAS ST 0420	400	2000	394	1994	300	1900	8.3
SSAS ST 0606	600	600	594	594	500	500	3.8
SSAS ST 0608	600	800	594	794	500	700	5.0
SSAS ST 0610	600	1000	594	994	500	900	6.1
SSAS ST 0612	600	1200	594	1194	500	1100	7.3
SSAS ST 0614	600	1400	594	1394	500	1300	8.5
SSAS ST 0616	600	1600	594	1594	500	1500	9.7
SSAS ST 0618	600	1800	594	1794	500	1700	10.9
SSAS ST 0620	600	2000	594	1994	500	1900	12.1
SSAS ST 0806	800	600	794	594	700	500	5.0
SSAS ST 0808	800	800	794	794	700	700	6.5
SSAS ST 0810	800	1000	794	994	700	900	8.1
SSAS ST 0812	800	1200	794	1194	700	1100	9.7
SSAS ST 0814	800	1400	794	1394	700	1300	11.2
SSAS ST 0816	800	1600	794	1594	700	1500	12.8
SSAS ST 0818	800	1800	794	1794	700	1700	14.4
SSAS ST 0820	800	2000	794	1994	700	1900	15.9
SSAS ST 1018	1000	1800	994	1794	900	1700	17.8
SSAS ST 1020	1000	2000	994	1994	900	1900	19.8
SSAS ST 1218	1200	1800	1194	1794	1100	1700	21.3
SSAS ST 1220	1200	2000	1194	1994	1100	1900	23.6
SSAS ST 1418	1400	1800	1394	1794	500+700	1700	25.7
SSAS ST 1420	1400	2000	1394	1994	500+700	1900	28.5

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm


Supply Includes
■ Rear panel fasteners

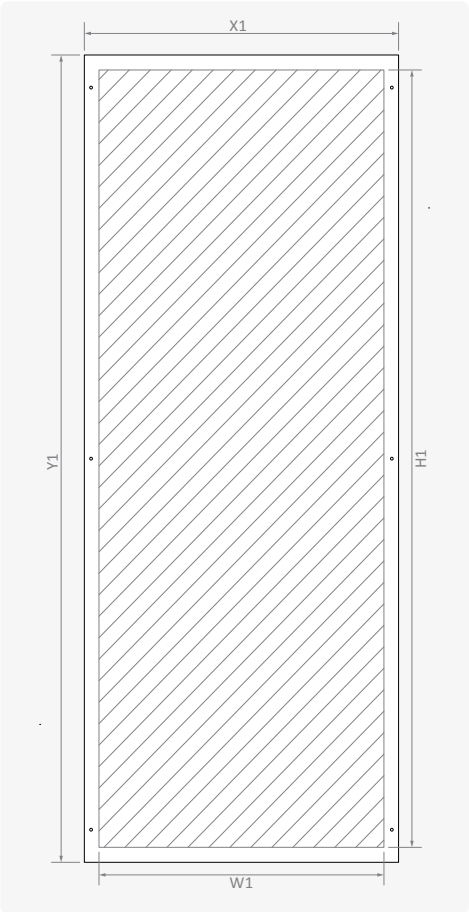

SIDE PANEL								
Reference	Height	Depth	Wide	Length	Useful Area			Weight
	B	C	X1	Y1	D3	H31	H32	
	mm	mm	mm	mm	mm	mm	mm	
SSAS YS 0640	600	400	270	580	194	340	-	1.8
SSAS YS 0650	600	500	370	580	294	340	-	2.4
SSAS YS 0660	600	600	470	580	394	340	-	2.9
SSAS YS 0840	800	400	270	780	194	540	-	2.4
SSAS YS 0850	800	500	370	780	294	540	-	3.1
SSAS YS 0860	800	600	470	780	394	540	-	3.9
SSAS YS 1040	1000	400	270	980	194	740	-	2.9
SSAS YS 1050	1000	500	370	980	294	740	-	3.9
SSAS YS 1060	1000	600	470	980	394	740	-	4.8
SSAS YS 1240	1200	400	270	1180	194	940	-	3.5
SSAS YS 1250	1200	500	370	1180	294	940	-	4.7
SSAS YS 1260	1200	600	470	1180	394	940	-	5.8
SSAS YS 1440	1400	400	270	1380	194	520	540	4.1
SSAS YS 1450	1400	500	370	1380	294	520	540	5.4
SSAS YS 1460	1400	600	470	1380	394	520	540	6.7
SSAS YS 1640	1600	400	270	1580	194	620	640	4.7
SSAS YS 1650	1600	500	370	1580	294	620	640	6.2
SSAS YS 1660	1600	600	470	1580	394	620	640	7.7
SSAS YS 1840	1800	400	270	1780	194	720	740	5.2
SSAS YS 1850	1800	500	370	1780	294	720	740	6.9
SSAS YS 1860	1800	600	470	1780	394	720	740	8.7
SSAS YS 1880	1800	800	670	1780	594	720	740	12.1
SSAS YS 2040	2000	400	270	1980	194	840	820	5.8
SSAS YS 2050	2000	500	370	1980	294	840	820	7.7
SSAS YS 2060	2000	600	470	1980	394	840	820	9.6
SSAS YS 2080	2000	800	670	1980	594	840	820	13.4

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm

Supply Includes
■ Side / Top panel mounting screw set

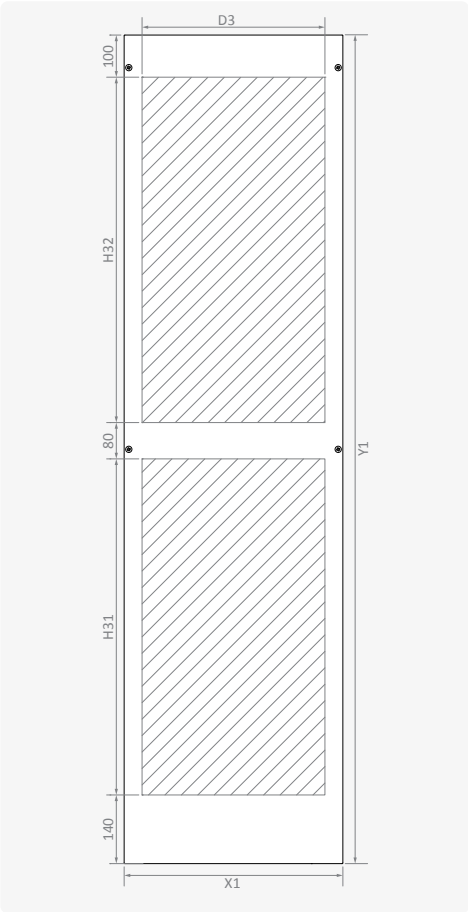


TOP COVER

Reference	Width	Depth	Wide	Length	Useful Area		Weight
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
SSAS TAV 040 40	400	400	400	270	350	194	1.4
SSAS TAV 040 50	400	500	400	370	350	294	1.8
SSAS TAV 040 60	400	600	400	470	350	394	2.3
SSAS TAV 040 80	400	800	400	670	350	594	3.2
SSAS TAV 060 40	600	400	600	270	550	194	1.9
SSAS TAV 060 50	600	500	600	370	550	294	2.6
SSAS TAV 060 60	600	600	600	470	550	394	3.2
SSAS TAV 060 80	600	800	600	670	550	594	4.5
SSAS TAV 080 40	800	400	800	270	750	194	2.5
SSAS TAV 080 50	800	500	800	370	750	294	3.3
SSAS TAV 080 60	800	600	800	470	750	394	4.2
SSAS TAV 080 80	800	800	800	670	750	594	5.8
SSAS TAV 100 40	1000	400	1000	270	950	194	3.1
SSAS TAV 100 50	1000	500	1000	370	950	294	4.1
SSAS TAV 100 60	1000	600	1000	470	950	394	5.1
SSAS TAV 100 80	1000	800	1000	670	950	594	7.2
SSAS TAV 120 40	1200	400	1200	270	1150	194	3.6
SSAS TAV 120 50	1200	500	1200	370	1150	294	4.8
SSAS TAV 120 60	1200	600	1200	470	1150	394	6.1
SSAS TAV 120 80	1200	800	1200	670	1150	594	8.5
SSAS TAV 140 40	1400	400	1400	270	1350	194	4.2
SSAS TAV 140 50	1400	500	1400	370	1350	294	5.6
SSAS TAV 140 60	1400	600	1400	470	1350	394	7.0
SSAS TAV 140 80	1400	800	1400	670	1350	594	9.8

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm

Supply Includes	
■ Side / Top panel mounting screw set	




RAIN CANOPY

Reference	Width	Depth	Wide	Length	Connection		Weight
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
SSAS SP 04 40	400	400	450	440	366	307	3.8
SSAS SP 04 50	400	500	450	540	366	407	4.6
SSAS SP 04 60	400	600	450	640	366	507	5.3
SSAS SP 04 80	400	800	450	840	366	707	6.7
SSAS SP 06 40	600	400	650	440	566	307	4.8
SSAS SP 06 50	600	500	650	540	566	407	5.8
SSAS SP 06 60	600	600	650	640	566	507	6.7
SSAS SP 06 80	600	800	650	840	566	707	8.5
SSAS SP 08 40	800	400	850	440	766	307	5.9
SSAS SP 08 50	800	500	850	540	766	407	6.9
SSAS SP 08 60	800	600	850	640	766	507	8.0
SSAS SP 08 80	800	800	850	840	766	707	10.2
SSAS SP 10 40	1000	400	1050	440	966	307	6.9
SSAS SP 10 50	1000	500	1050	540	966	407	8.1
SSAS SP 10 60	1000	600	1050	640	966	507	9.4
SSAS SP 10 80	1000	800	1050	840	966	707	12.0
SSAS SP 12 40	1200	400	1250	440	1166	307	7.9
SSAS SP 12 50	1200	500	1250	540	1166	407	9.3
SSAS SP 12 60	1200	600	1250	640	1166	507	10.8
SSAS SP 12 80	1200	800	1250	840	1166	707	13.8
SSAS SP 14 40	1400	400	1450	440	1366	307	8.9
SSAS SP 14 50	1400	500	1450	540	1366	407	10.5
SSAS SP 14 60	1400	600	1450	640	1366	507	12.2
SSAS SP 14 80	1400	800	1450	840	1366	707	15.5

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm

Supply Includes	
■ Mounting screws	

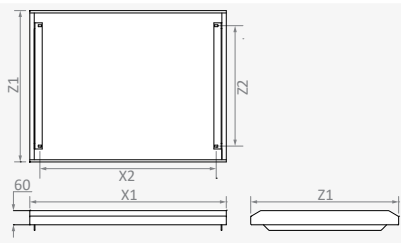


MOUNTING PLATE

Reference	Width	Height	Wide	Length	Connection				Connection	Weight
	A mm	B mm	X1 mm	Y1 mm	X2 mm	Y2 mm	X3 mm	Y3 mm	n pcs	
AS TS 0406	400	600	302	502	241	400	260	-	4	3.3
AS TS 0408	400	800	302	702	241	600	260	-	4	4.5
AS TS 0410	400	1000	302	902	241	800	260	-	4	5.7
AS TS 0412	400	1200	302	1102	241	1000	260	-	4	6.9
AS TS 0414	400	1400	302	1302	241	1200	260	600	6	8.1
AS TS 0416	400	1600*	302	1502	241	1400	260	700	6	9.3
AS TS 0418	400	1800	302	1702	241	1600	260	800	6	10.5
AS TS 0420	400	2000	302	1902	241	1800	260	900	6	11.6
AS TS 0606	600	600	502	502	441	400	460	-	4	5.1
AS TS 0608	600	800	502	708	441	600	460	-	4	7.0
AS TS 0610	600	1000	502	902	441	800	460	-	4	8.7
AS TS 0612	600	1200	502	1102	441	1000	460	-	4	10.6
AS TS 0614	600	1400	502	1302	441	1200	460	600	6	12.4
AS TS 0616	600	1600*	502	1502	441	1400	460	700	6	14.2
AS TS 0618	600	1800	502	1702	441	1600	460	800	6	16.1
AS TS 0620	600	2000	502	1902	441	1800	460	900	6	17.9
AS TS 0806	800	600	702	502	641	400	660	-	4	6.9
AS TS 0808	800	800	702	702	641	600	660	-	4	9.3
AS TS 0810	800	1000	702	902	641	800	660	-	4	11.8
AS TS 0812	800	1200	702	1102	641	1000	660	-	4	14.3
AS TS 0814	800	1400	702	1302	641	1200	660	600	6	16.7
AS TS 0816	800	1600*	702	1402	641	1400	660	700	6	18.0
AS TS 0818	800	1800	702	1702	641	1600	660	800	6	21.7
AS TS 0820	800	2000	702	1902	641	1800	660	900	6	24.2
AS TS 1018	1000	1800	902	1702	841	1600	860	800	6	27.3
AS TS 1020	1000	2000	902	1902	841	1800	860	900	6	30.4
AS TS 1218	1200	1800	1102	1702	1041	1600	1060	800	6	32.9
AS TS 1220	1200	2000	1102	1902	1041	1800	1060	900	6	36.7
AS TS 1418	1400	1800	1302	1702	1241	1600	1260	800	6	38.5
AS TS 1420	1400	2000	1302	1902	1241	1800	1260	900	6	42.9

Characteristics	
■ Material	DIN EN 10327 DX51D+Z galvanized
■ Thickness	2 mm

Supply Includes	
■ Mounting screws	
■ Carriage slide support and fasteners	

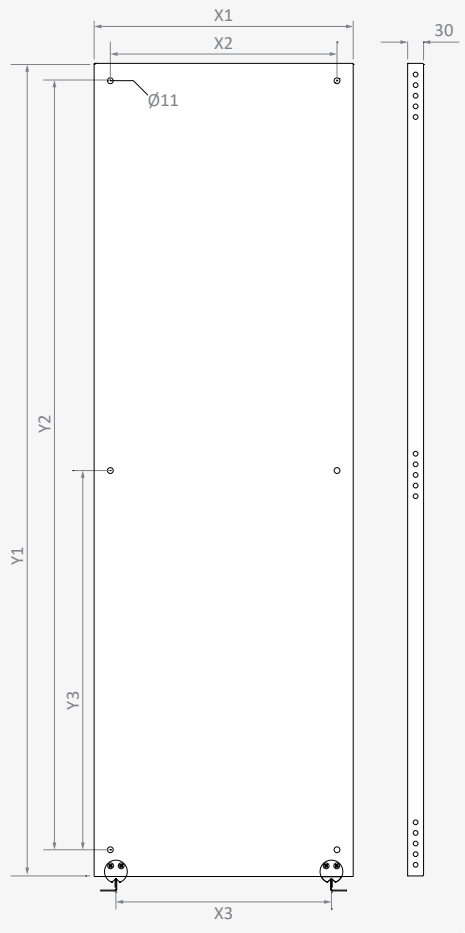


PLINTH									
Reference	Width	Depth	Wide	Length	Height	Connection			Weight
	A	C	X1	Z1	Y1	X2	Z2	Z21	
	mm	mm	mm	mm	mm	mm	mm	mm	
SSAS Bx000404 1	400	400	400	345	100	320	240	-	5.3
SSAS Bx000405 1	400	500	400	445	100	320	340	-	6.4
SSAS Bx000406 1	400	600	400	545	100	320	440	220	7.4
SSAS Bx000408 1	400	800	400	745	100	320	640	320	9.5
SSAS Bx000604 1	600	400	600	345	100	520	240	-	6.8
SSAS Bx000605 1	600	500	600	445	100	520	340	-	8.2
SSAS Bx000606 1	600	600	600	545	100	520	440	220	9.3
SSAS Bx000608 1	600	800	600	745	100	520	640	320	11.8
SSAS Bx000804 1	800	400	800	345	100	720	240	-	8.0
SSAS Bx000805 1	800	500	800	445	100	720	340	-	9.5
SSAS Bx000806 1	800	600	800	545	100	720	440	220	10.9
SSAS Bx000808 1	800	800	800	745	100	720	640	320	13.8
SSAS Bx001004 1	1000	400	1000	345	100	920	240	-	9.4
SSAS Bx001005 1	1000	500	1000	445	100	920	340	-	11.2
SSAS Bx001006 1	1000	600	1000	545	100	920	440	220	12.6
SSAS Bx001008 1	1000	800	1000	745	100	920	640	320	15.9
SSAS Bx001204 1	1200	400	1200	345	100	1120	240	-	10.8
SSAS Bx001205 1	1200	500	1200	445	100	1120	340	-	12.9
SSAS Bx001206 1	1200	600	1200	545	100	1120	440	220	14.5
SSAS Bx001208 1	1200	800	1200	745	100	1120	640	320	18.2
SSAS Bx001404 1	1400	400	600+800	345	100	520+720	240	-	14.8
SSAS Bx001405 1	1400	500	600+800	445	100	520+720	340	-	17.7
SSAS Bx001406 1	1400	600	600+800	545	100	520+720	440	220	20.2
SSAS Bx001408 1	1400	800	600+800	745	100	520+720	640	320	25.6
SSAS Bx000404 2	400	400	400	345	200	320	240	-	6.9
SSAS Bx000405 2	400	500	400	445	200	320	340	-	8.2
SSAS Bx000406 2	400	600	400	545	200	320	440	220	9.3
SSAS Bx000408 2	400	800	400	745	200	320	640	320	11.7
SSAS Bx000604 2	600	400	600	345	200	520	240	-	8.8
SSAS Bx000605 2	600	500	600	445	200	520	340	-	10.3
SSAS Bx000606 2	600	600	600	545	200	520	440	220	11.6
SSAS Bx000608 2	600	800	600	745	200	520	640	320	14.4
SSAS Bx000804 2	800	400	800	345	200	720	240	-	10.4
SSAS Bx000805 2	800	500	800	445	200	720	340	-	12.1
SSAS Bx000806 2	800	600	800	545	200	720	440	220	13.5
SSAS Bx000808 2	800	800	800	745	200	720	640	320	16.7
SSAS Bx001004 2	1000	400	1000	345	200	920	240	-	12.2
SSAS Bx001005 2	1000	500	1000	445	200	920	340	-	14.2
SSAS Bx001006 2	1000	600	1000	545	200	920	440	220	15.8
SSAS Bx001008 2	1000	800	1000	745	200	920	640	320	19.3
SSAS Bx001204 2	1200	400	1200	345	200	1120	240	-	14.0
SSAS Bx001205 2	1200	500	1200	445	200	1120	340	-	16.2
SSAS Bx001206 2	1200	600	1200	545	200	1120	440	220	17.9
SSAS Bx001208 2	1200	800	1200	745	200	1120	640	320	21.8
SSAS Bx001404 2	1400	400	600+800	345	200	520+720	240	-	14.8
SSAS Bx001405 2	1400	500	600+800	445	200	520+720	340	-	17.7
SSAS Bx001406 2	1400	600	600+800	545	200	520+720	440	220	20.2
SSAS Bx001408 2	1400	800	600+800	745	200	520+720	640	320	25.6

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.5 mm





Supply Includes	
■ Cover plates and mounting screws	
■ Plinth mounting fasteners	

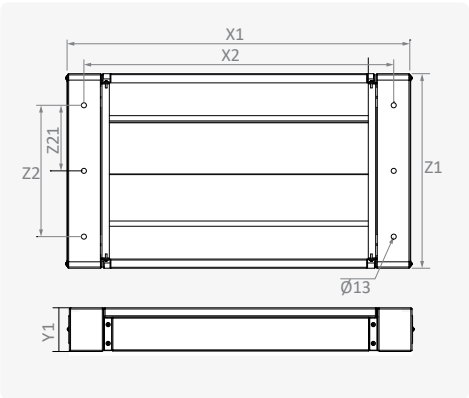

BOTTOM COVER PLATE					
Reference	Width	Depth	Wide	Length	Weight
	A	C	X	Y	
	mm	mm	mm	mm	
SSAS BS 0440	400	400	394	340	2.1
SSAS BS 0450	400	500	394	440	2.7
SSAS BS 0460	400	600	394	540	3.3
SSAS BS 0480	400	800	394	740	4.6
SSAS BS 0640	600	400	594	340	3.2
SSAS BS 0650	600	500	594	440	4.1
SSAS BS 0660	600	600	594	540	5.0
SSAS BS 0680	600	800	594	740	6.9
SSAS BS 0840	800	400	794	340	4.2
SSAS BS 0850	800	500	794	440	5.5
SSAS BS 0860	800	600	794	540	6.7
SSAS BS 0880	800	800	794	740	9.2
SSAS BS 1040	1000	400	994	340	5.3
SSAS BS 1050	1000	500	994	440	6.9
SSAS BS 1060	1000	600	994	540	8.4
SSAS BS 1080	1000	800	994	740	11.6
SSAS BS 1240	1200	400	1194	340	6.4
SSAS BS 1250	1200	500	1194	440	8.3
SSAS BS 1260	1200	600	1194	540	10.1
SSAS BS 1280	1200	800	1194	740	13.9
SSAS BS 1440	1400	400	1394	340	7.4
SSAS BS 1450	1400	500	1394	440	9.6
SSAS BS 1460	1400	600	1394	540	11.8
SSAS BS 1480	1400	800	1394	740	16.2

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	2 mm


Supply Includes	
■ Bottom cover plate fasteners	

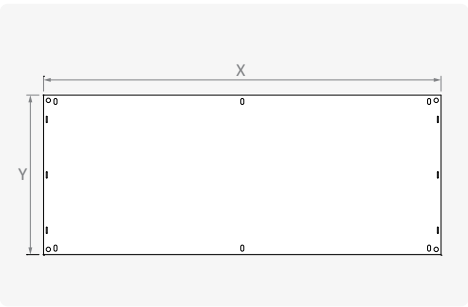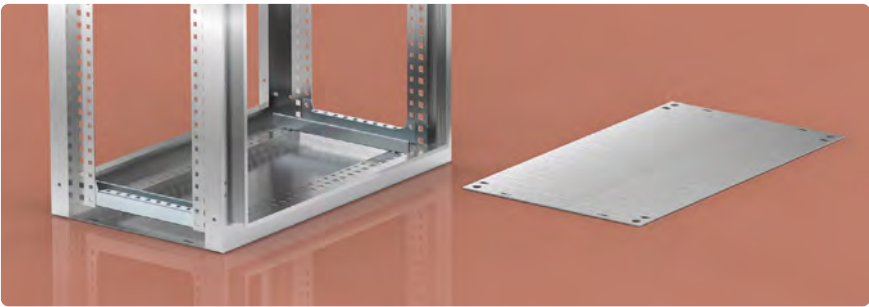

PLAN POCKETS					
Reference	Width	Length			Weight
	A	X1	Y1	Z2	
	mm	mm	mm	mm	
SSAS PJ 040	All Dimensions	230	200	30	0.4
SSAS PJ 060	600/1200	420	240	60	1.9
SSAS PJ 080	800	620	240	60	2.6



Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm

Supply Includes	
■ Mounting fasteners to fix door reinforcement frame	

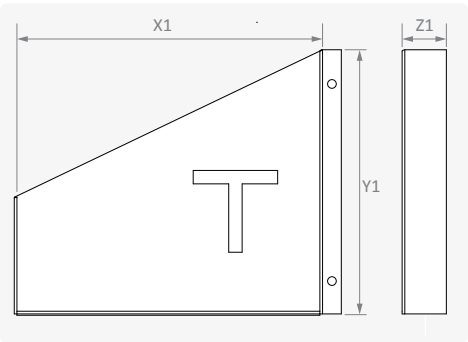


JOINING & LIFTING SET

Reference	Depth	Length	Connection		Weight	Characteristics
	C mm	Z1 mm	Z2 mm	Z3 mm		
SSAS TP 040	400	340	287	307	1.4	■ Material Stainless Steel 304L (EN 10088 1.4307) ■ Surface Finishing Scotch-brite brushed ■ Thickness 3 mm
SSAS TP 050	500	440	387	407	1.7	
SSAS TP 060	600	540	487	507	2.1	
SSAS TP 080	800	740	687	707	2.7	Supply Includes ■ 2 pcs lifting and joining profiles and fasteners ■ 10 m 10x3 mm EPDM Conta ■ Frame fasteners

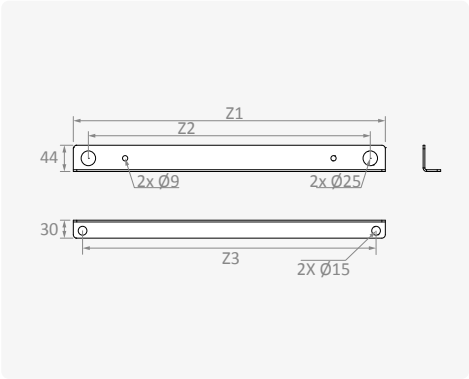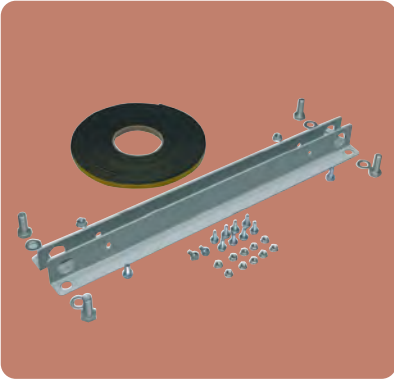

JOINING SET

Reference	Connection	Diameter	Weight
AS AH 020	M12	Ø 25	kg/set 1.0
Characteristics		Supply Includes	
■ Material	C15E Forged steel	■ 2 pcs lifting and joining profiles and fasteners	
■ Surface Finishing	Zinc coated Cr ⁺³ passivation	■ 10 m 10x3 mm EPDM Conta	
■ Thickness	5 mm	■ Frame fasteners	




EYE BOLT

Reference	Connection	Int. Diameter	Packet	Weight
			pcs/packet	kg/packet
AS AH 020	M12	Ø 30	4	1.0
Characteristics				
■ Material	C15E Forged steel			
■ Surface Finishing	Zinc coated Cr+3 passivation			
■ Standards	DIN 580			



LOCKS & HINGES


Reference	Description
KIEMANKQPS2M0	1 AS Lock
MNAS000011	2 AS Hinge



EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm ²	mm			
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

