



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Stainless Steel 304L (EN 10088 1.4307)

■ Body : 1.2 mm

■ Door : 1.2 mm

Galvanized Steel (EN 10346 DX51D+Z)

■ Mounting plate : 1.5 - 2 mm

Surface Finishing

■ Scotch-brite brushed

IP Rating

■ IP66 (TS 3033, EN 60529)

Others

■ All welded construction

■ Solid / glazed door

■ Foamed-in door PU sealing gasket

■ 135° concealed hinges

■ 5mm Double-bit insert chrome coated zamak lock

■ Bottom gland plate

■ One piece PE gasket for gland plate

On Request

■ Custom sizes

■ Pre-punching

■ 316L Grade SS

■ Special mounting plate



Supply Includes

■ Body

■ Door (Select ≈ K)

■ Mounting plate (Option ≈ M)

■ Gland plate with gasket

■ 4/6 pcs wall brackets

Complementary Accessories

■ Rain canopy

■ Support base

■ DIN rail

■ Door inside mounting profile

■ Pole fitting set


■ Plastic cover plate

■ Special locks and keys

■ Earthing cable









Width	Height	Depth	Reference	Door	Lock Type	Lock	Hinge	Wall Bracket	Weight	Application Options		
A	B	C							**	Glazed Door	Rain Canopy	Support Base
mm	mm	mm		pcs	*	pcs	pcs	pcs	kg	Y / N	Y / N	Y / N
300	300	150	SSETS xxx 030315	1	C	1	2	4	6.5	✓	✓	✓
	400	150	SSETS xxx 030415	1	C	1	2	4	8.2	✓	✓	✓
		200	SSETS xxx 030420	1	C	1	2	4	9.0	✓	✓	✓
	500	200	SSETS xxx 030520	1	C	1	2	4	10.9	✓	✓	✓
400	400	200	SSETS xxx 040420	1	C	1	2	4	11.2	✓	✓	✓
	500	200	SSETS xxx 040520	1	C	1	2	4	13.4	✓	✓	✓
	600	200	SSETS xxx 040620	1	C	2	2	4	14.8	✓	✓	✓
		300	SSETS xxx 040630	1	C	2	2	4	16.7	✓	✓	✓
500	500	200	SSETS xxx 050520	1	C	1	2	4	16.0	✓	✓	✓
	700	200	SSETS xxx 050720	1	C	2	3	4	21.2	✓	✓	✓
		300	SSETS xxx 050730	1	C	2	3	4	22.9	✓	✓	✓
600	600	200	SSETS xxx 060620	1	C	2	2	4	22.1	✓	✓	✓
	800	200	SSETS xxx 060820	1	C	2	3	4	28.0	✓	✓	✓
		300	SSETS xxx 060830	1	C	2	3	4	29.5	✓	✓	✓
	1000	300	SSETS xxx 061030	1	C	2	3	4	38.5	✓	✓	✓
800	800	300	SSETS xxx 080830	1	C	2	3	4	39	✓	✓	✓
	1000	300	SSETS xxx 081030	1	C	2	4	4	49.5	✓	✓	✓
	1200	300	SSETS xxx 081230	1	C	2	4	4	63	✓	✓	✓
1000	1000	300	SSETS xxx 101030	2	C	2	4+4	6	64	✓	✓	✓
										* C: Quarter Turn I: Rod-latch		
										** For SSETS 110 GG YY DD		

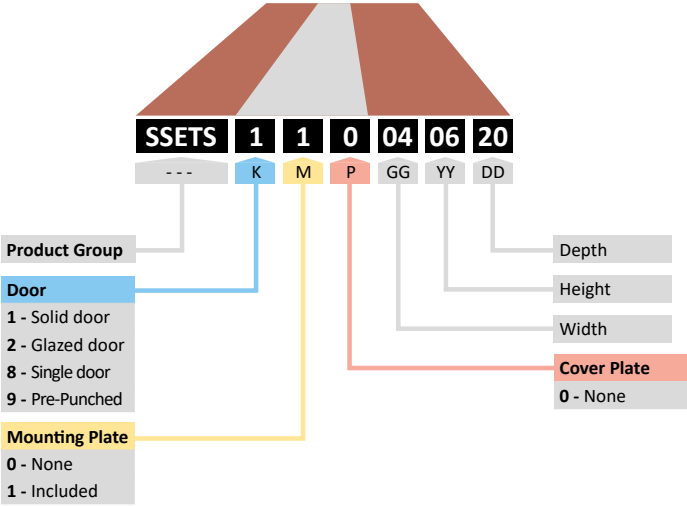

			K →	Solid Door	Glazed Door
			M →	Mounting Plate	Mounting Plate
			P →	-- --	-- --
Width	Height	Depth	Door	Reference	Reference
A	B	C	pcs		
mm	mm	mm			
300	300	150	1	SSETS 110 030315	SSETS 210 030315
	400	150	1	SSETS 110 030415	SSETS 210 030415
		200	1	SSETS 110 030420	SSETS 210 030420
	500	200	1	SSETS 110 030520	SSETS 210 030520
400	400	200	1	SSETS 110 040420	SSETS 210 040420
	500	200	1	SSETS 110 040520	SSETS 210 040520
	600	200	1	SSETS 110 040620	SSETS 210 040620
		300	1	SSETS 110 040630	SSETS 210 040630
500	500	200	1	SSETS 110 050520	SSETS 210 050520
	700	200	1	SSETS 110 050720	SSETS 210 050720
		300	1	SSETS 110 050730	SSETS 210 050730
600	600	200	1	SSETS 110 060620	SSETS 210 060620
	800	200	1	SSETS 110 060820	SSETS 210 060820
		300	1	SSETS 110 060830	SSETS 210 060830
	1000	300	1	SSETS 110 061030	SSETS 210 061030
800	800	300	1	SSETS 110 080830	SSETS 210 080830
	1000	300	1	SSETS 110 081030	SSETS 210 081030
	1200	300	1	SSETS 110 081230	SSETS 210 081230
1000	1000	300	2	SSETS 110 101030	-- --

			K →	Pre-Punched Door	Solid Door
			M →	Mounting Plate	-- --
			P →	-- --	-- --
Width	Height	Depth	Door	Reference	Reference
A	B	C	pcs		
mm	mm	mm			
300	300	150	1	SSETS 910 030315	SSETS 100 030315
	400	150	1	SSETS 910 030415	SSETS 100 030415
		200	1	SSETS 910 030420	SSETS 100 030420
	500	200	1	SSETS 910 030520	SSETS 100 030520
400	400	200	1	SSETS 910 040420	SSETS 100 040420
	500	200	1	SSETS 910 040520	SSETS 100 040520
	600	200	1	SSETS 910 040620	SSETS 100 040620
		300	1	SSETS 910 040630	SSETS 100 040630
500	500	200	1	SSETS 910 050520	SSETS 100 050520
	700	200	1	SSETS 910 050720	SSETS 100 050720
		300	1	SSETS 910 050730	SSETS 100 050730
600	600	200	1	SSETS 910 060620	SSETS 100 060620
	800	200	1	SSETS 910 060820	SSETS 100 060820
		300	1	SSETS 910 060830	SSETS 100 060830
	1000	300	1	SSETS 910 061030	SSETS 100 061030
800	800	300	1	SSETS 910 080830	SSETS 100 080830
	1000	300	1	SSETS 910 081030	SSETS 100 081030
	1200	300	1	SSETS 910 081230	SSETS 100 081230
1000	1000	300	2	SSETS 910 101030	SSETS 100 101030

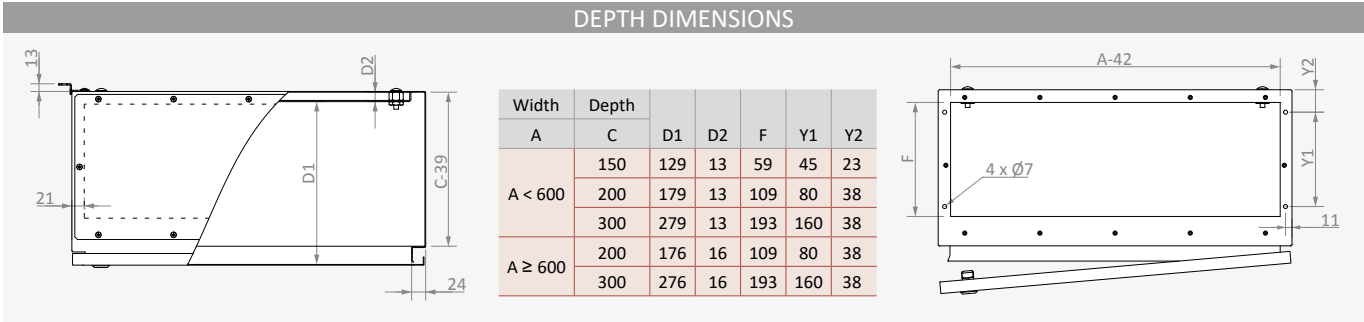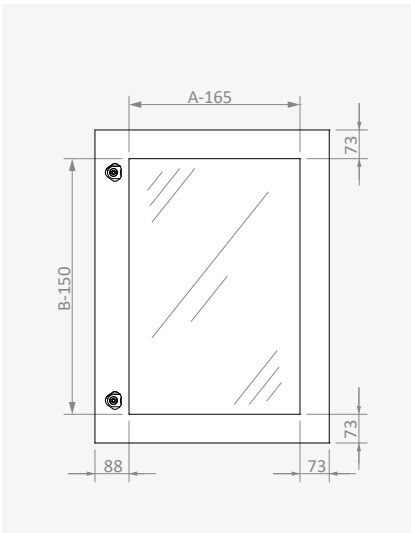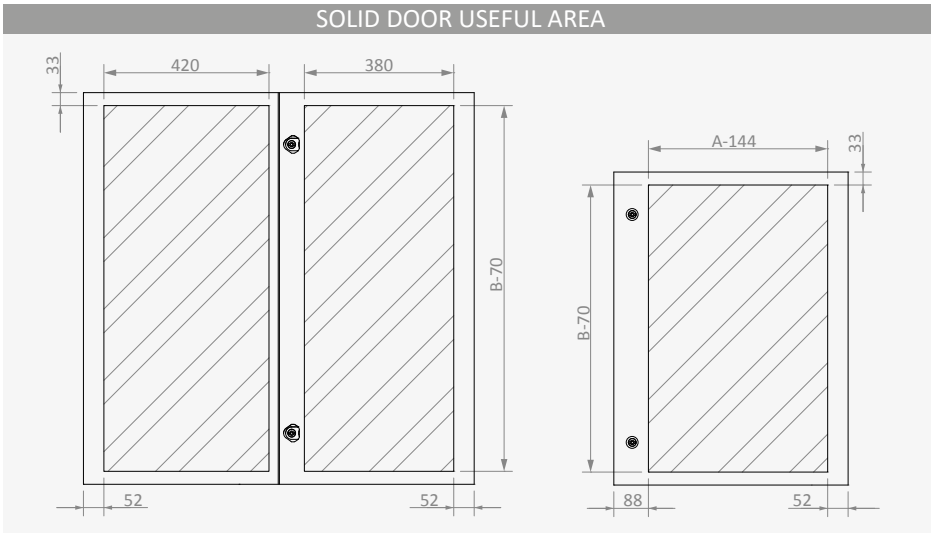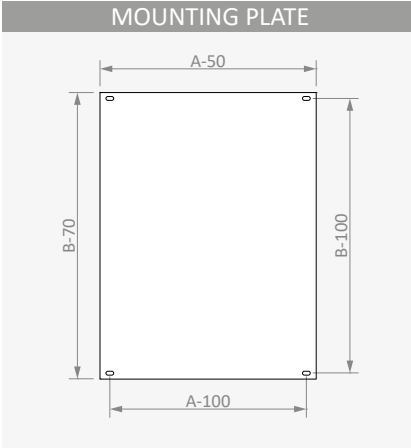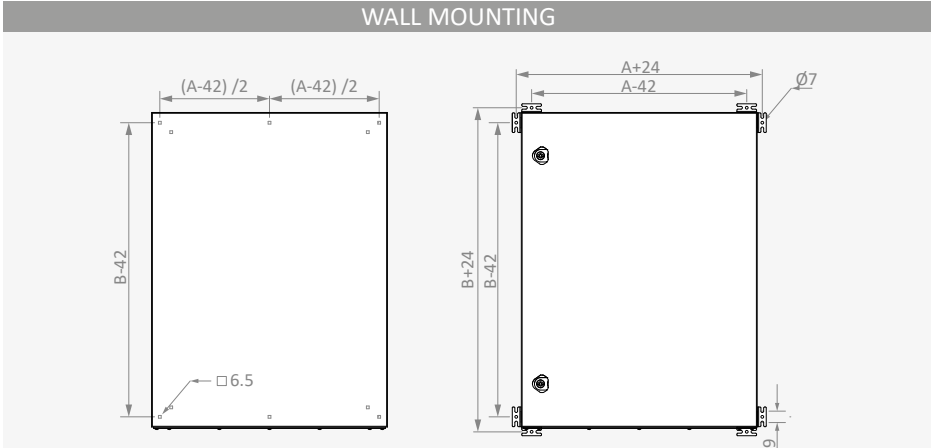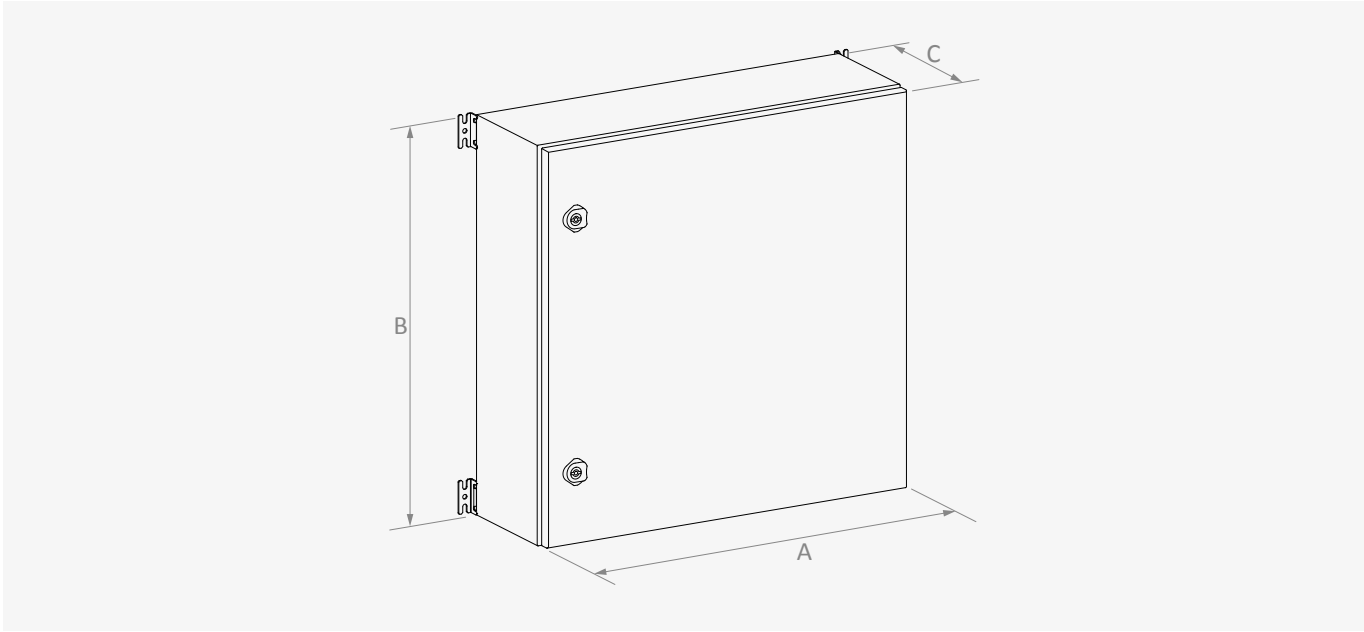


Width	Height	Depth	Reference	Useful Area			Glazed Door Apparent Area		Gland Plate			Wall Mounting						Mounting Plate	
				Door		Side	↔		↕		#	↔		↕		↕		↔	
				↔	↕	↗	↔	↕	↔	↕	pcs	↔	↕	↔	↕	↔	↕	↔	↕
mm	mm	mm		mm	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm
300	300	150	SSETS xxx 030315	156	230	127	135	150	1	260	60	324	258	258	324	258	258	250	230
	400	150	SSETS xxx 030415	156	330	127	135	250	1	260	60	324	358	258	424	258	358	250	330
	200		SSETS xxx 030420	156	330	177	135	250	1	260	110	324	358	258	424	258	358	250	330
	500	200	SSETS xxx 030520	156	430	177	135	350	1	260	110	324	458	258	524	258	458	250	430
400	400	200	SSETS xxx 040420	256	330	177	235	250	1	360	110	424	358	358	424	358	358	350	330
	500	200	SSETS xxx 040520	256	430	177	235	350	1	360	110	424	458	358	524	358	458	350	430
	200		SSETS xxx 040620	256	530	177	235	450	1	360	110	424	558	358	624	358	558	350	530
	600	300	SSETS xxx 040630	256	530	277	235	450	1	360	210	424	558	358	624	358	558	350	530
500	500	200	SSETS xxx 050520	356	430	177	335	350	1	460	110	524	458	458	524	458	458	450	430
	700	200	SSETS xxx 050720	356	630	177	335	550	1	460	110	524	658	458	724	458	658	450	630
	300		SSETS xxx 050730	356	630	277	335	550	1	460	210	524	658	458	724	458	658	450	630
600	600	200	SSETS xxx 060620	456	530	177	435	450	1	560	110	624	558	558	624	558	558	550	530
	800	200	SSETS xxx 060820	456	730	177	435	650	1	560	110	624	758	558	824	558	758	550	730
	300		SSETS xxx 06 0830	456	730	277	435	650	1	560	210	624	758	558	824	558	758	550	730
	1000	300	SSETS xxx 061030	456	950	277	435	850	1	560	210	624	958	558	1024	558	958	550	930
800	800	300	SSETS xxx 080830	656	730	277	635	650	1	760	210	824	758	758	824	758	758	750	730
	1000	300	SSETS xxx 081030	656	930	277	635	850	1	760	210	824	958	758	1024	758	958	750	930
	1200	300	SSETS xxx 081230	656	1130	277	635	1150	1	760	210	824	1158	758	1224	758	1158	750	1130
1000	1000	300	SSETS xxx 101030	420+380	930	277	--	--	1	960	210	1024	958	958	1024	958	958	950	930

SOLID DOOR

Reference	Width		Height		Useful Area		Door	Lock Type	Lock	Hinge	Thickness	Weight
	A	B			W1	H1						
	mm	mm			mm	mm						
SSETS KP 0303	300	300			156	230	1	C	1	2	1.2	1.1
SSETS KP 0304	300	400			156	330	1	C	1	2	1.2	1.5
SSETS KP 0305	300	500			156	430	1	C	1	2	1.2	1.8
SSETS KP 0404	400	400			256	330	1	C	1	2	1.2	1.9
SSETS KP 0405	400	500			256	430	1	C	1	2	1.2	2.4
SSETS KP 0406	400	600			256	530	1	C	2	2	1.2	2.8
SSETS KP 0505	500	500			356	430	1	C	1	2	1.2	2.9
SSETS KP 0507	500	700			356	630	1	C	1	3	1.2	4.0
SSETS KP 0606	600	600			456	530	1	C	2	2	1.2	4.1
SSETS KP 0608	600	800			456	730	1	C	2	3	1.2	5.4
SSETS KP 0610	600	1000			456	930	1	C	2	3	1.2	6.7
SSETS KP 0808	800	800			656	730	1	C	2	3	1.2	7.1
SSETS KP 0810	800	1000			656	930	1	C	2	4	1.5	11.1
SSETS KP 0812	800	1200			656	1130	1	C	2	4	1.5	12.5
SSETS KP 1010	1000	1000			420 + 380	930	2	C	2	4+4	1.5	13.9


Characteristics		Supply Includes	
Material	Stainless Steel 304L (EN 10088 1.4307)	Lock	Double door gutter Conta
Surface Finishing	Scotch-brite brushed	* C: Quarter Turn	

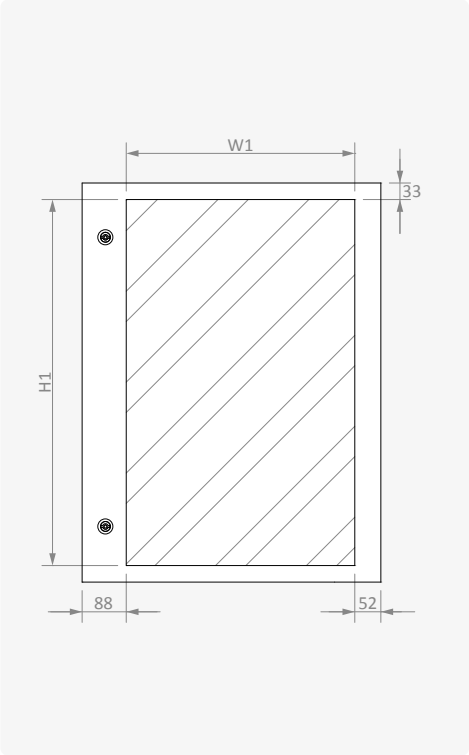

GLAZED DOOR


Reference	Width		Height		Apparent Area		Door	Lock Type	Lock	Hinge	Thickness	Weight
	A	B			W6	H6						
	mm	mm			mm	mm						
SSETS KPX 0303	300	300			135	150	1	C	1	2	1.2	1.1
SSETS KPX 0304	300	400			135	250	1	C	1	2	1.2	1.5
SSETS KPX 0305	300	500			135	350	1	C	1	2	1.2	1.8
SSETS KPX 0404	400	400			235	250	1	C	1	2	1.2	1.9
SSETS KPX 0405	400	500			235	350	1	C	1	2	1.2	2.4
SSETS KPX 0406	400	600			235	450	1	C	2	2	1.2	2.8
SSETS KPX 0505	500	500			335	350	1	C	1	2	1.2	2.9
SSETS KPX 0507	500	700			335	550	1	C	1	3	1.2	4.0
SSETS KPX 0606	600	600			435	450	1	C	2	2	1.2	4.1
SSETS KPX 0608	600	800			435	650	1	C	2	3	1.2	5.4
SSETS KPX 0610	600	1000			435	850	1	C	2	3	1.2	6.7
SSETS KPX 0808	800	800			635	650	1	C	2	3	1.2	7.1
SSETS KPX 0810	800	1000			635	850	1	C	2	4	1.5	11.1
SSETS KPX 0812	800	1200			635	1150	1	C	2	4	1.5	11.9

Characteristics		Supply Includes	
Material	Stainless Steel 304L (EN 10088 1.4307) / 4mm tempered glass	Lock	
Surface Finishing	Scotch-brite brushed	* C: Quarter Turn	

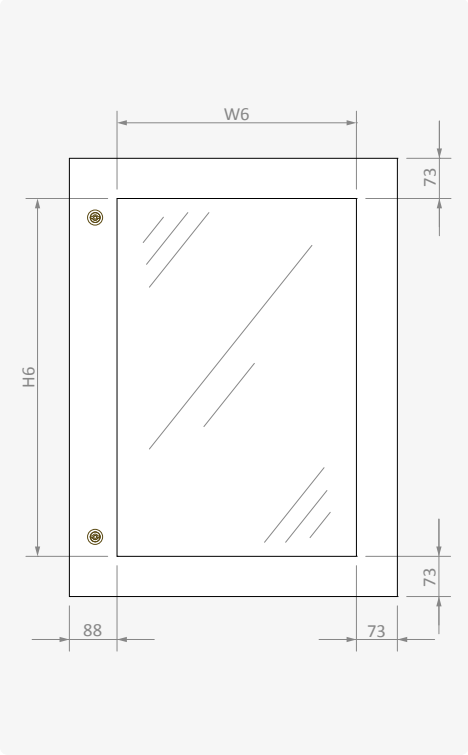

MOUNTING PLATE								
Reference	Width		External Dimensions			Mounting Dimensions		
	A	B	X1	Y1	Z	X2	Y2	D
	mm	mm	mm	mm	mm	mm	mm	mm
ETS TS 0303	300	300	250	230	12	200	200	M6
ETS TS 0304	300	400	250	330	12	200	300	M6
ETS TS 0305	300	500	250	430	12	200	400	M6
ETS TS 0404	400	400	350	330	12	300	300	M6
ETS TS 0405	400	500	350	430	12	300	400	M6
ETS TS 0406	400	600	350	530	12	300	500	M6
ETS TS 0505	500	500	450	430	12	400	400	M6
ETS TS 0507	500	700	450	630	12	400	600	M6
ETS TS 0606	600	600	550	530	15	500	500	M8
ETS TS 0608	600	800	550	730	15	500	700	M8
ETS TS 0610	600	1000	550	930	15	500	900	M8
ETS TS 0808	800	800	750	730	15	700	700	M8
ETS TS 0810	800	1000	750	930	15	700	900	M8
ETS TS 0812	800	1200	750	1130	15	700	1100	M8
ETS TS 1010	1000	1000	950	930	15	900	900	M8


Characteristics	
Material	DIN EN 10346 DX51D+Z galvanized
Thickness	1.5 - 2 mm

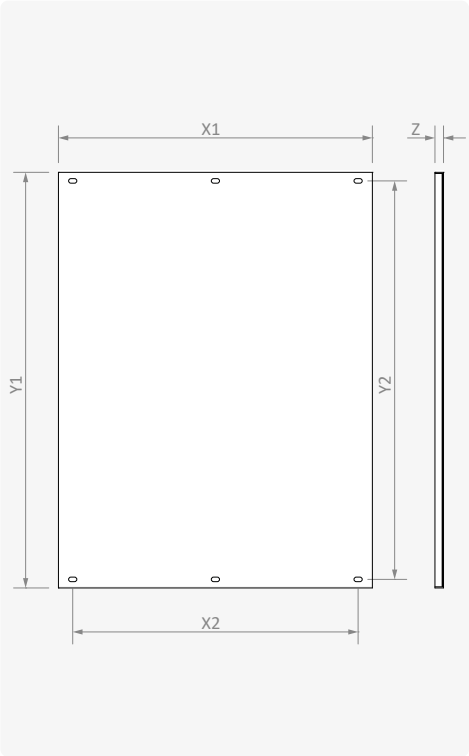

RAIN CANOPY							
Reference	Width		Depth		External Dimensions		Weight
	A		C		X1	Z1	
	mm		mm		mm	mm	
SSETS HS 0315	300		150		325	175	1.1
SSETS HS 0320	300		200		325	225	1.6
SSETS HS 0420	400		200		425	225	2.0
SSETS HS 0430	400		300		425	325	2.4
SSETS HS 0520	500		200		525	225	2.4
SSETS HS 0530	500		300		575	325	3.0
SSETS HS 0620	600		200		625	225	2.7
SSETS HS 0630	600		300		625	325	3.4
SSETS HS 0820	800		200		825	225	3.6
SSETS HS 0830	800		300		825	325	4.7
SSETS HS 1030	1000		300		1025	325	5.6

Characteristics	
Material	Stainless Steel 304L (EN 10088 1.4307)
Surface Finishing	Scotch-brite brushed
Thickness	1.2 - 1.5 mm


Supply Includes
Mounting fasteners

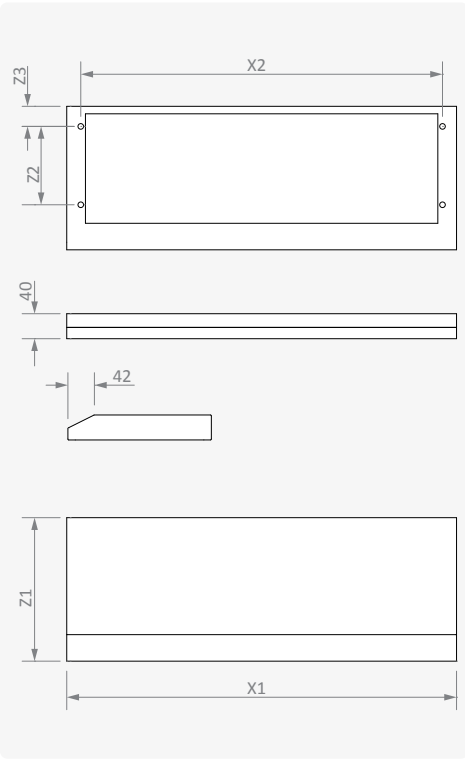



SUPPORT BASE										
Width	Depth	Reference	Reference	External Dimensions		Mounting Dimensions				Weight
A	C			X1	Z1	X2	Z2	X3	Z3	
mm	mm					mm	mm	mm	mm	mm
300	150	PNETSATG03	PNETSATD15	478	270	448	218	278	45	3,2
300	200	PNETSATG03	PNETSATD20	478	320	448	268	278	80	3.4
400	200	PNETSATG04	PNETSATD20	578	320	548	268	378	80	3.5
400	300	PNETSATG04	PNETSATD30	578	420	400	268	378	160	3.5
500	200	PNETSATG05	PNETSATD20	678	320	648	268	478	80	3.8
500	300	PNETSATG05	PNETSATD30	678	420	500	268	478	160	3.8
600	200	PNETSATG06	PNETSATD20	778	320	748	268	578	80	4.0
600	300	PNETSATG06	PNETSATD30	778	420	600	268	578	160	4.0
800	300	PNETSATG08	PNETSATD30	978	420	800	268	778	160	4.3
1000	300	PNETSATG10	PNETSATD30	1178	420	1000	268	978	160	4.6

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	2 mm

Supply Includes
■ Mounting fasteners

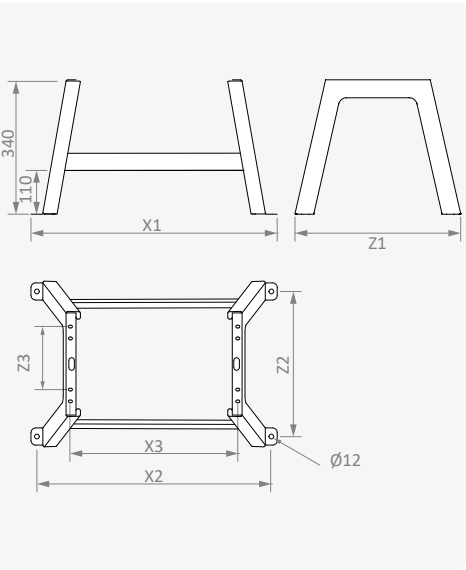


WALL BRACKETS				
Reference	Packet	Weight	Characteristics	
	pcs/packet	kg/packet	■ Material	Stainless Steel 304L (EN 10088 1.4307)
SSAK KL 010	4	0.16	■ Surface Finishing	Scotch-brite brushed
SSAK KL 011	6	0.25	■ Thickness	2 mm

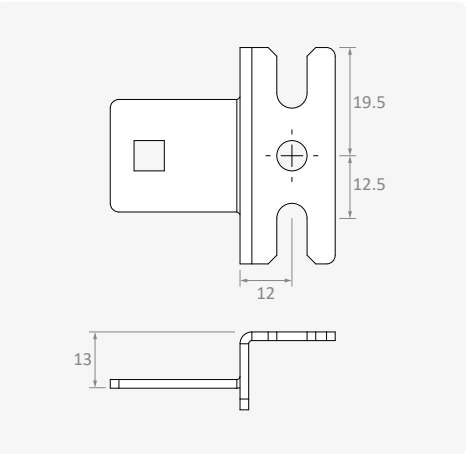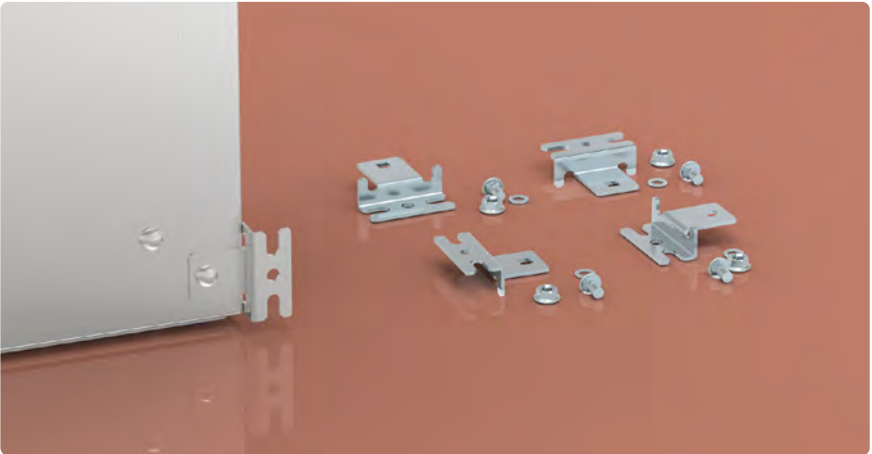

CABLE GLAND PLATE							
Reference	Width	Depth	External Dimensions		Useful Area		Weight
	A	C	X1	Z1	X2	Z2	
	mm	mm	mm	mm	mm	mm	kg
SSETS GP 3015	300	150	290	96	260	60	0.4
SSETS GP 3020	300	200	290	146	260	110	0.6
SSETS GP 4020	400	200	390	146	360	110	0.7
SSETS GP 4030	400	300	390	246	360	210	0.9
SSETS GP 5020	500	200	490	146	460	110	0.9
SSETS GP 5030	500	300	490	246	460	210	1.1
SSETS GP 6020	600	200	590	146	560	110	1.1
SSETS GP 6030	600	300	590	246	560	210	1.3
SSETS GP 8020	800	200	790	146	760	110	1.5
SSETS GP 8030	800	300	790	246	760	210	2.4

Characteristics	
■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.5 mm


Supply Includes
■ One piece PE Conta
■ Mounting fasteners

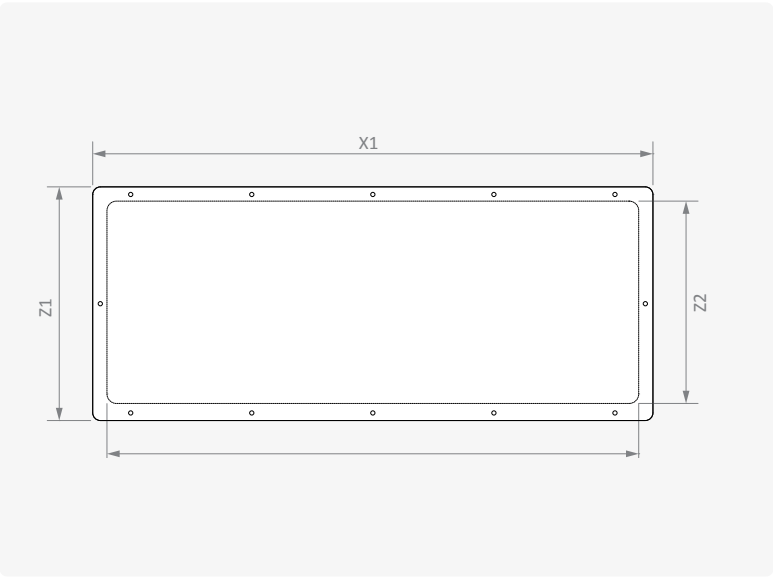

MOUNTING PROFILE INSIDE DOOR				
Reference	Height B	Length Y1	Weight	
AS KU Y00400	300	220	1.1	
AS KU Y00500	400	320	1.2	
AS KU Y00600	500	420	0.3	
AS KU DRM100	600	520	0.4	

Reference	Height B	Length Y1	Weight	
AS KU Y00800	700	620	0.4	
AS KU D00900	800	720	0.5	
AS KU DRM120	1000	920	0.6	
AS KU DRM150	1200	1120	0.8	



Characteristics	
■ Material	20x20 square profile galvanized
■ Thickness	1.2 mm

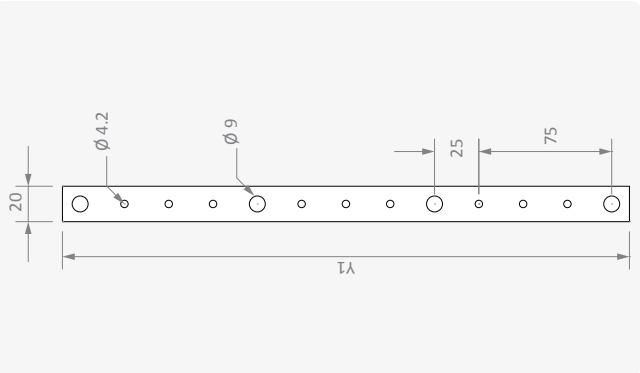

STANDOFF


Reference	External Dimensions	Width Across Flats	Mounting Dimensions	Packet	Weight
	H	L	male / female	pcs/packet	kg/packet
	mm	mm			
HD BM 00000196	25	13	M6 / M6	20	0.5
HD BM 00000200	50				1.1
HD BM 00000240	75				1.6
HD BM 00000210	125				2.3
HD BM 00000220	50	17	M8 / M8	20	1.8
HD BM 00000230	125				4.7

Characteristics	
Material	Hexagonal free-cutting steel
Surface Finishing	Zinc coated; Cr ⁺³ passivation
Connection	male/female

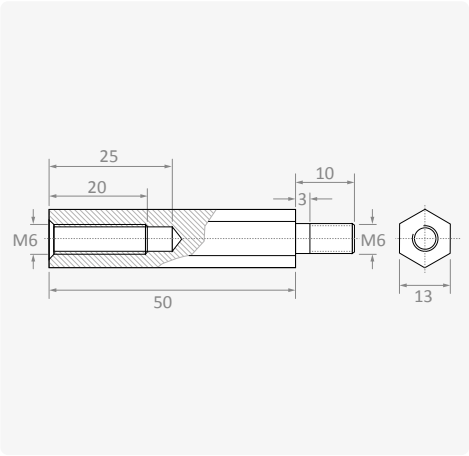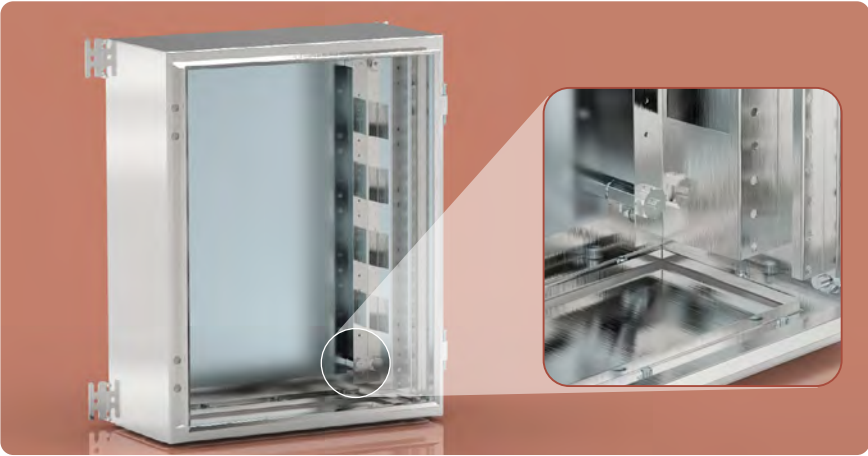

EARTHING CABLE


Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm		pcs/packet	kg/packet
KBOZ 06 01908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.2
KB TP 16092200	Nickel Plated, Braided Copper Conductor	16	200	M8-M8	10	0.3

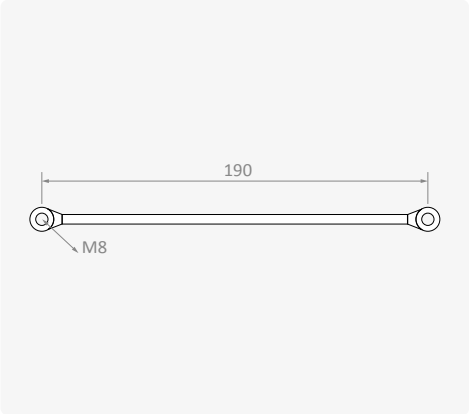

DIN RAILS

Reference	Width	Height	Hole	Length	Weight
	mm	mm	Yes/No	m	kg/pcs
M RTP350752000	35	7.5	Yes	2	0.7
M RTP351502000	35	15	Yes	2	1.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	Zinc coated Cr ⁺³ passivation
Standards	DIN EN 60715

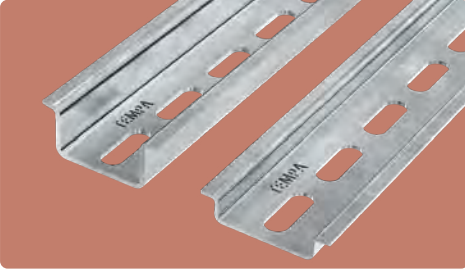

LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
	*	Casing	Cam	Key Type	**
KIMS0601115211	C	Chrome Coated Zamak	Zinc coated steel	5 mm Double-bit	KIAN 0100

* C: Quarter Turn;
** Keys should be ordered separately.




SPECIAL LOCKS AND KEYS

Reference	Lock Type	Material		Description		Image #	Key Code
	*	Casing	Cam	Key Type	Casing Type		**
KIMS 0601115211	C	Chrome Coated Zamak	Zinc coated steel	5mm Double-bit		1	KIAN 0100
KIEM D5KQ0ZS2M1	C	Black Powder Coated Zamak	Zinc coated steel	5mm Double-bit	Padlockable	2	KIAN 0100
KIMS 0601137211	C	Chrome Coated Zamak	Zinc coated steel	6.5mm Triangular		3	KIMSN 06737
KIMS 0601127211	C	Chrome Coated Zamak	Zinc coated steel	8mm Triangular		4	KIMSN 06738
KIMS 0601138211	C	Chrome Coated Zamak	Zinc coated steel	7mm Square		5	KIMSN 06727
KIMS 063110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key		6	KIM 55333
KIMS 065110522	C	Chrome Coated Zamak	Zinc coated steel	Euro Key	Wing Knob	7	KIM 55333
KIMS 0622021	C	Polyamide	Zinc coated steel	-	Wing Knob	8	-
KIMS 0621122	C	Chrome Coated Zamak	Zinc coated steel	-	Wing Knob	9	-
KIEM KEZQ0ZS2M0	C	Chrome Coated Zamak	Zinc coated steel	-	Padlockable	10	-

* C: Quarter Turn; You can see lock quantities of single door and double door enclosures on table at "Overview Page".
*** Keys should be ordered separately.





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

