



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

- Material**
Stainless Steel 304L (EN 10088 1.4307)
■ Body : 1.2 mm
■ Lid : 1.2 mm
- Surface Finishing**
■ Scotch-brite brushed
- IP Rating**
■ IP55 (TS 3033, EN 60529)
- Others**
■ All welded construction
■ Screwed plain lid
■ One piece EPDM lid gasket
■ Ready for DIN rail fixing

On Request

- Custom sizes
■ Pre-punching
■ 316L Grade SS




Supply Includes






- Body
■ Lid
■ Lid gasket
■ Lid screws

Complementary Accessories



- DIN rail
■ Wall bracket 2/4
■ Earthing cable

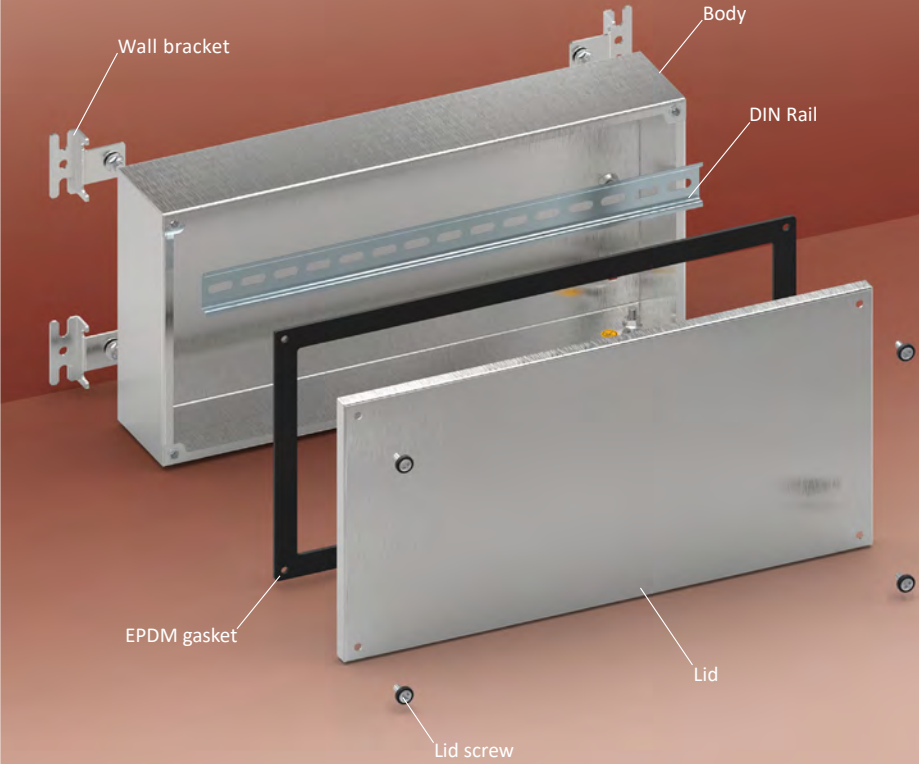



Width	Height	Depth	Reference	Useful Area			Wall Mounting						DIN Rail Fixing	Weight
A	B	C		Lid		Side	With Bracket				Internal			
				↔	↕	↗	Side		Up/Down					
mm	mm	mm		mm	mm	mm	↔	↕	↔	↕	↔	↕	↔	
80	160	60	SSJB 081606	45	125	44	---	118	---	184	---	118	30	0.6
100	100	60	SSJB 101006	65	65	44	---	58	---	124	---	58	50	0.6
120	120	60	SSJB 121206	85	85	44	---	78	---	144	---	78	70	0.7
160	160	80	SSJB 161608	125	125	64	---	118	---	184	---	118	110	1.4
200	200	80	SSJB 202008	165	165	64	---	158	---	224	---	158	150	1.9
300	200	100	SSJB 302010	265	165	84	324	158	258	224	258	158	250	2.4
	300	100	SSJB 303010	265	265	84	324	258	258	324	258	258	2 x 250	3.2
400	200	100	SSJB 402010	365	165	84	424	158	358	224	358	158	350	2.8

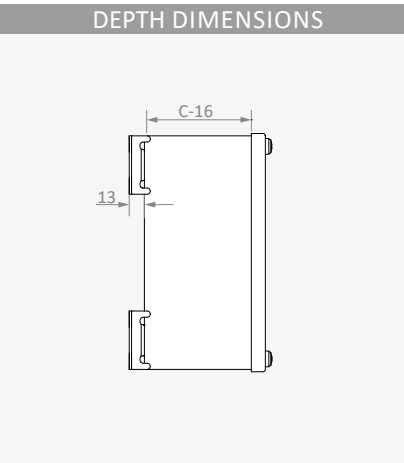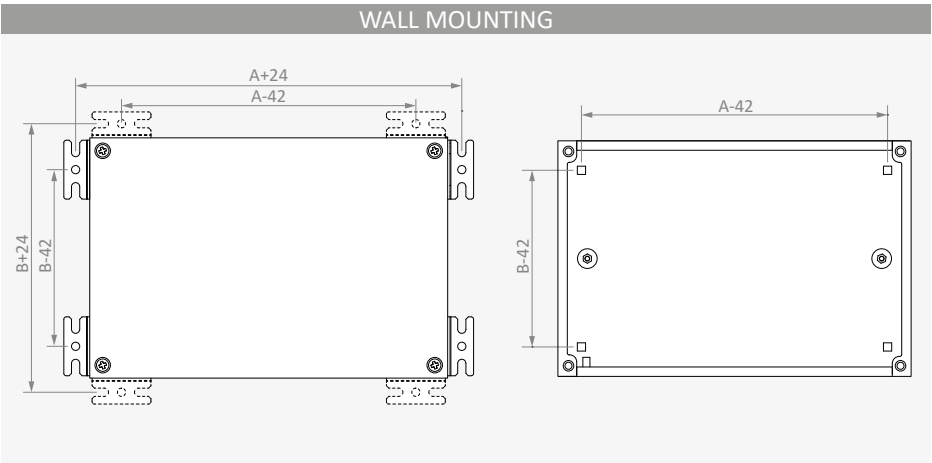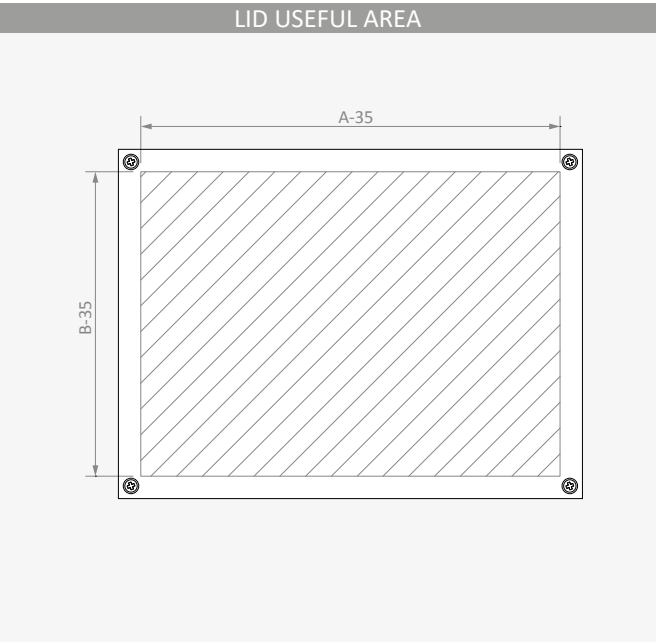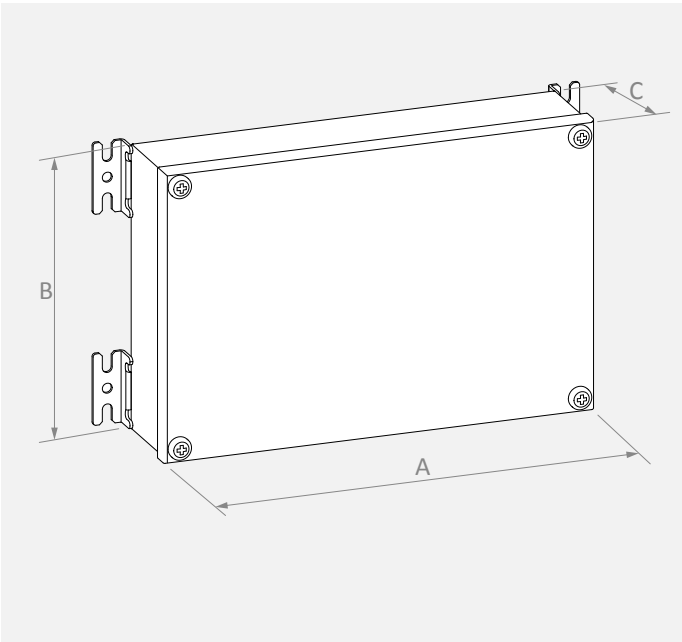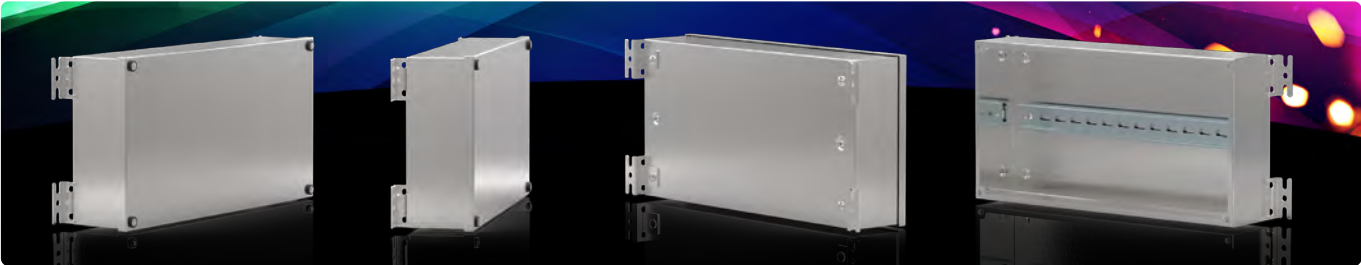

DIN RAILS					
Reference	Width	Height	Hole	Length	Weight
	mm	mm	Yes/No	m	kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2
Characteristics					
■ Material	DIN EN 10130 DC01 CCRS				
■ Surface Finishing	Zinc coated Cr ⁺³ passivation				
■ Standards	DIN EN 60715				

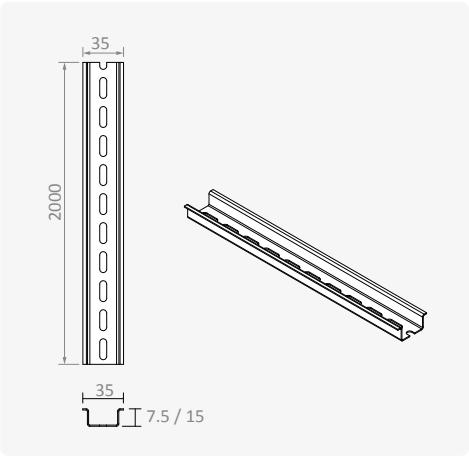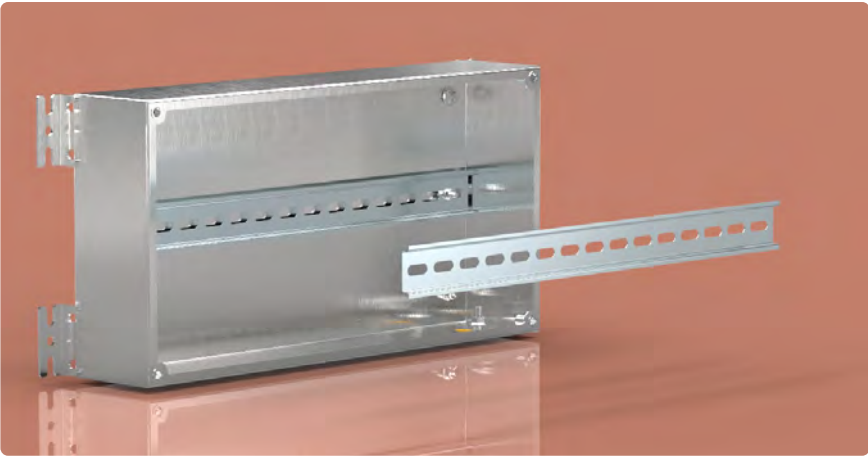


WALL BRACKETS					
Reference	Packet	Weight	Characteristics		Supply Includes
	pcs/packet	kg/packet	■ Material	316L EN 10088 1.4404	
SSAK KL 010	4	0.16	■ Surface Finishing	Scotch-brite	■ Wall mounting screws
			■ Thickness	2 mm	

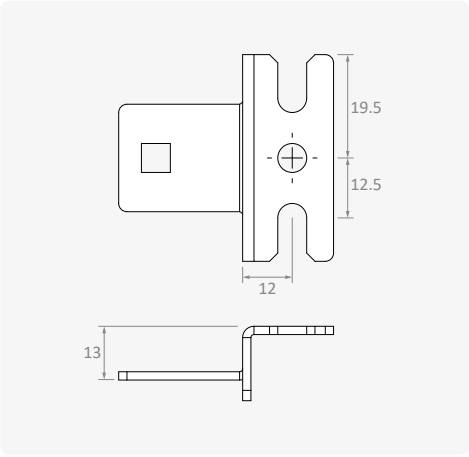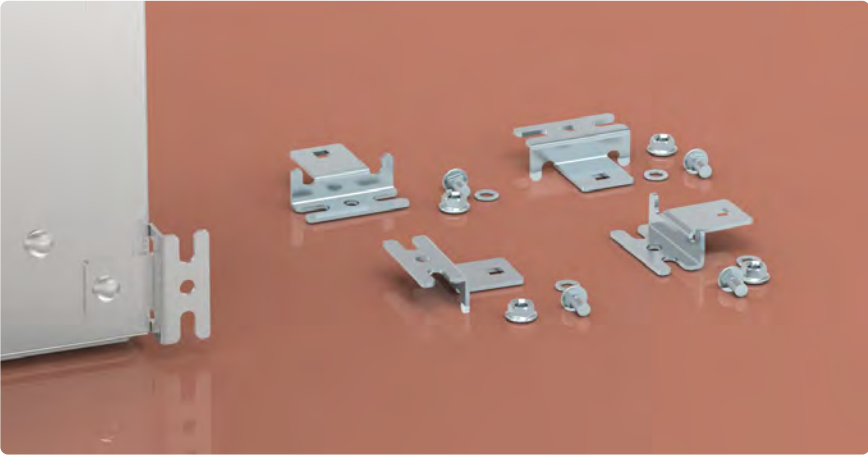


LID MOUNTING FASTENERS			
Reference	Packet	Weight	Supply Includes
	pcs/packet	kg/packet	
AK AK JB 051210	50	0.17	■ 50 pcs M5 x 12 YSB screws ■ 50 pcs M5 Finishing washer



EARTHING CABLE						
Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm		pcs/packet	kg/packet
KB OZ 061908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.16

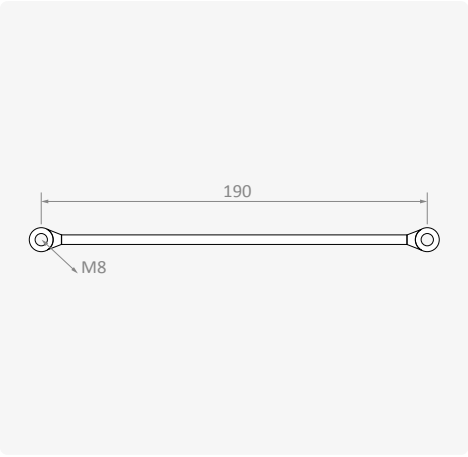



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

