



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,,
"your reliable
solution partner,,*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

Stainless Steel 304L (EN 10088 1.4307)

- Body : 1.5 mm
 - Door : 1.5 mm
 - Plinth : 1.5 mm
- Galvanized Steel (EN 10346 DX51D+Z)
- Mounting plate : 2 mm

Surface Finishing

- Scotch-brite brushed

IP Rating

- IP65 (TS 3033, EN 60529)

Others

- All welded monobloc body
- Foamed-in door PU sealing gasket
- Swing-handle polyamide lock (3 points locking, 333 key)
- Concealed hinge
- Multiple mounting plate possibility
- Plinth and cover options

On Request

- Custom sizes
- Custom colour
- Pre-punching
- 316L Grade SS




Supply Includes

- Body
- Door (Select ≈ K)
- Rear panel (Select ≈ K)
- Mounting plate (Option ≈ M)
- Plinth (Option ≈ P)




Complementary Accessories

- Rain canopy
- Door inside mounting profile
- Partial mounting plate
- Carriage depth slide and support
- L, U and Z profiles
- L and Z brackets
- Plan pocket
- Earthing cable
- 4/6 pcs side rails
- 4 pcs Z profiles

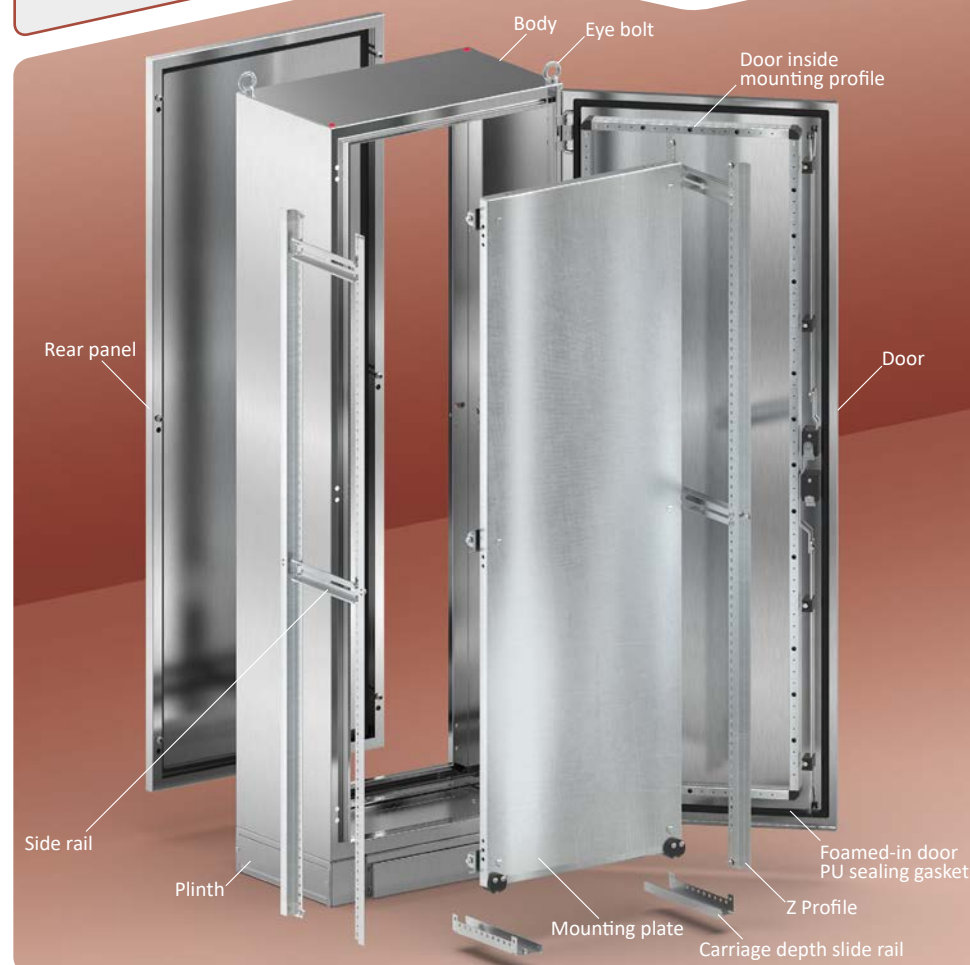

Width	Height	Depth	Reference	Door	Hinge
A	B	C		pcs	pcs
mm	mm	mm			
400	600	400	SSMS xxx 040640	1	2
		500	SSMS xxx 040650	1	2
		600	SSMS xxx 040660	1	2
	800	400	SSMS xxx 040840	1	2
		500	SSMS xxx 040850	1	2
		600	SSMS xxx 040860	1	2
	1000	400	SSMS xxx 041040	1	2
		500	SSMS xxx 041050	1	2
		600	SSMS xxx 041060	1	2
	1200	400	SSMS xxx 041240	1	2
		500	SSMS xxx 041250	1	2
		600	SSMS xxx 041260	1	2
	1400	400	SSMS xxx 041440	1	3
		500	SSMS xxx 041450	1	3
		600	SSMS xxx 041460	1	3
	1600	400	SSMS xxx 041640	1	3
		500	SSMS xxx 041650	1	3
		600	SSMS xxx 041660	1	3
	1800	400	SSMS xxx 041840	1	3
		500	SSMS xxx 041850	1	3
		600	SSMS xxx 041860	1	3
	2000	400	SSMS xxx 041880	1	3
		500	SSMS xxx 042040	1	3
		600	SSMS xxx 042050	1	3
600	600	400	SSMS xxx 060640	1	2
		500	SSMS xxx 060650	1	2
		600	SSMS xxx 060660	1	2
	800	400	SSMS xxx 060840	1	2
		500	SSMS xxx 060850	1	2
		600	SSMS xxx 060860	1	2
	1000	400	SSMS xxx 061040	1	2
		500	SSMS xxx 061050	1	2
		600	SSMS xxx 061060	1	2
	1200	400	SSMS xxx 061240	1	2
		500	SSMS xxx 061250	1	2
		600	SSMS xxx 061260	1	2
	1400	400	SSMS xxx 061440	1	3
		500	SSMS xxx 061450	1	3
		600	SSMS xxx 061460	1	3
	1600	400	SSMS xxx 061640	1	3
		500	SSMS xxx 061650	1	3
		600	SSMS xxx 061660	1	3
	1800	400	SSMS xxx 061840	1	3
		500	SSMS xxx 061850	1	3
		600	SSMS xxx 061860	1	3
	2000	400	SSMS xxx 061880	1	3
		500	SSMS xxx 062040	1	3
		600	SSMS xxx 062050	1	3
800	600	400	SSMS xxx 080640	1	2
		500	SSMS xxx 080650	1	2
		600	SSMS xxx 080660	1	2
	800	400	SSMS xxx 080840	1	2
		500	SSMS xxx 080850	1	2
		600	SSMS xxx 080860	1	2
	1000	400	SSMS xxx 081040	1	2
		500	SSMS xxx 081050	1	2
		600	SSMS xxx 081060	1	2
	1200	400	SSMS xxx 081240	1	2
		500	SSMS xxx 081250	1	2
		600	SSMS xxx 081260	1	2
	1400	400	SSMS xxx 081440	1	3
		500	SSMS xxx 081450	1	3
		600	SSMS xxx 081460	1	3
	1600	400	SSMS xxx 081640	1	3
		500	SSMS xxx 081650	1	3
		600	SSMS xxx 081660	1	3
	1800	400	SSMS xxx 081840	1	3
		500	SSMS xxx 081850	1	3
		600	SSMS xxx 081860	1	3
	2000	400	SSMS xxx 081880	1	3
		500	SSMS xxx 082040	1	3
		600	SSMS xxx 082050	1	3
1000	600	400	SSMS xxx 100640	1	2
		500	SSMS xxx 100650	1	2
		600	SSMS xxx 100660	1	2
	800	400	SSMS xxx 100840	1	2
		500	SSMS xxx 100850	1	2
		600	SSMS xxx 100860	1	2
	1000	400	SSMS xxx 101040	1	2
		500	SSMS xxx 101050	1	2
		600	SSMS xxx 101060	1	2
	1200	400	SSMS xxx 101240	1	2
		500	SSMS xxx 101250	1	2
		600	SSMS xxx 101260	1	2
	1400	400	SSMS xxx 101440	1	3
		500	SSMS xxx 101450	1	3
		600	SSMS xxx 101460	1	3
	1600	400	SSMS xxx 101640	1	3
		500	SSMS xxx 101650	1	3
		600	SSMS xxx 101660	1	3
	1800	400	SSMS xxx 101840	1	3
		500	SSMS xxx 101850	1	3
		600	SSMS xxx 101860	1	3
	2000	400	SSMS xxx 101880	1	3
		500	SSMS xxx 102040	1	3
		600	SSMS xxx 102050	1	3
1200	600	400	SSMS xxx 120640	1	2
		500	SSMS xxx 120650	1	2
		600	SSMS xxx 120660	1	2
	800	400	SSMS xxx 120840	1	2
		500	SSMS xxx 120850	1	2
		600	SSMS xxx 120860	1	2
	1000	400	SSMS xxx 121040	1	2
		500	SSMS xxx 121050	1	2
		600	SSMS xxx 121060	1	2
	1200	400	SSMS xxx 121240	1	2
		500	SSMS xxx 121250	1	2
		600	SSMS xxx 121260	1	2
	1400	400	SSMS xxx 121440	1	3
		500	SSMS xxx 121450	1	3
		600	SSMS xxx 121460	1	3
	1600	400	SSMS xxx 121640	1	3
		500	SSMS xxx 121650	1	3
		600	SSMS xxx 121660	1	3
	1800	400	SSMS xxx 121840	1	3
		500	SSMS xxx 121850	1	3
		600	SSMS xxx 121860	1	3
	2000	400	SSMS xxx 121880	1	3
		500	SSMS xxx 122040	1	3
		600	SSMS xxx 122050	1	3
1400	600	400	SSMS xxx 140640	1	2
		500	SSMS xxx 140650	1	2
		600	SSMS xxx 140660	1	2
	800	400	SSMS xxx 140840	1	2
		500	SSMS xxx 140850	1	2
		600	SSMS xxx 140860	1	2
	1000	400	SSMS xxx 141040	1	2
		500	SSMS xxx 141050	1	2
		600	SSMS xxx 141060	1	2
	1200	400	SSMS xxx 141240	1	2
		500	SSMS xxx 141250	1	2
		600	SSMS xxx 141260	1	2
	1400	400	SSMS xxx 141440	1	3
		500	SSMS xxx 141450	1	3
		600	SSMS xxx 141460	1	3
	1600	400	SSMS xxx 141640	1	3
		500	SSMS xxx 141650	1	3
		600	SSMS xxx 141660	1	3
	1800	400	SSMS xxx 141840	1	3
		500	SSMS xxx 141850	1	3
		600	SSMS xxx 141860	1	3
	2000	400	SSMS xxx 141880	1	3
		500	SSMS xxx 142040	1	3
		600	SSMS xxx 142050	1	3

Width	Height	Depth	Reference	Door	Hinge	
A	B	C				
mm	mm	mm		pcs	pcs	
800	600	400	SSMS xxx 080640	1	2	
		500	SSMS xxx 080650	1	2	
		600	SSMS xxx 080660	1	2	
	800	400	SSMS xxx 080840	1	2	
		500	SSMS xxx 080850	1	2	
		600	SSMS xxx 080860	1	2	
	1000	400	SSMS xxx 081040	1	2	
		500	SSMS xxx 081050	1	2	
		600	SSMS xxx 081060	1	2	
	1200	400	SSMS xxx 081240	1	2	
		500	SSMS xxx 081250	1	2	
		600	SSMS xxx 081260	1	2	
	1400	400	SSMS xxx 081440	1	3	
		500	SSMS xxx 081450	1	3	
		600	SSMS xxx 081460	1	3	
	1600	400	SSMS xxx 081640	1	3	
		500	SSMS xxx 081650	1	3	
		600	SSMS xxx 081660	1	3	
	1800	400	SSMS xxx 081840	1	3	
		500	SSMS xxx 081850	1	3	
		600	SSMS xxx 081860	1	3	
	2000	400	SSMS xxx 081880	1	3	
		500	SSMS xxx 082040	1	3	
		600	SSMS xxx 082050	1	3	
1000	1800	400	SSMS xxx 101840	2	3+3	
		500	SSMS xxx 101850	2	3+3	
		600	SSMS xxx 101860	2	3+3	
	2000	800	SSMS xxx 101880	2	3+3	
		400	SSMS xxx 102040	2	3+3	
		500	SSMS xxx 102050	2	3+3	
		600	SSMS xxx 102060	2	3+3	
	2000	800	SSMS xxx 102080	2	3+3	
		1200	400	SSMS xxx 121840	2	3+3
			500	SSMS xxx 121850	2	3+3
	600		SSMS xxx 121860	2	3+3	
	800		SSMS xxx 121880	2	3+3	
	400		SSMS xxx 122040	2	3+3	
	500		SSMS xxx 122050	2	3+3	
	600		SSMS xxx 122060	2	3+3	
	1400	1800	800	SSMS xxx 122080	2	3+3
			400	SSMS xxx 141840	2	3+3
500			SSMS xxx 141850	2	3+3	
600			SSMS xxx 141860	2	3+3	
2000		800	SSMS xxx 141880	2	3+3	
		400	SSMS xxx 142040	2	3+3	
		500	SSMS xxx 142050	2	3+3	
		600	SSMS xxx 142060	2	3+3	
1600	800	SSMS xxx 142080	2	3+3		

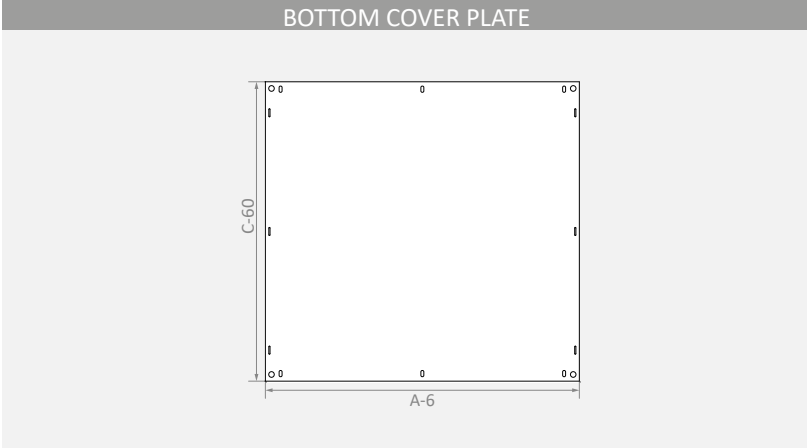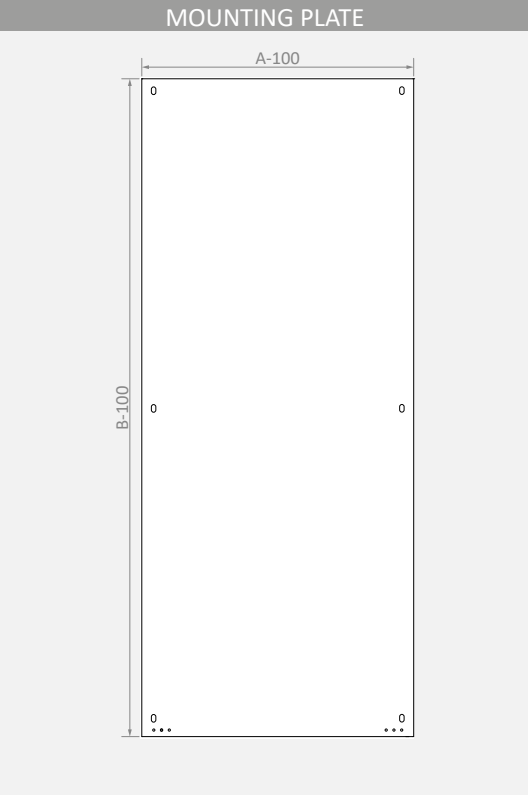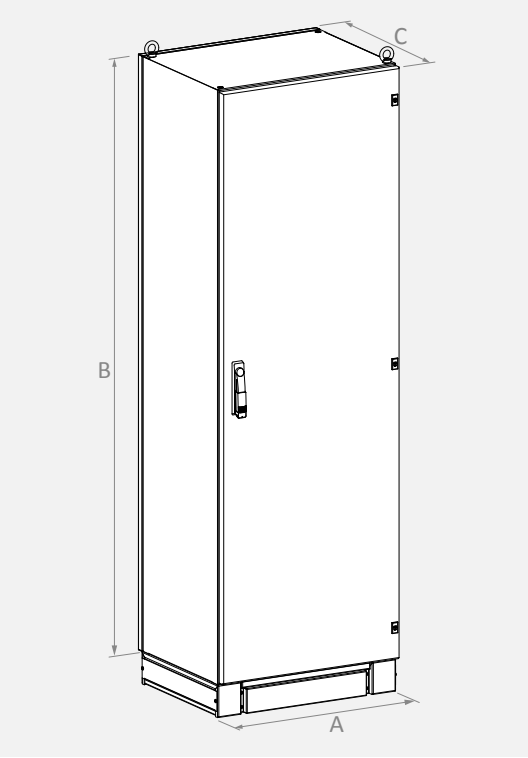

Width	Height	Reference
A	B	
mm	mm	
400	600	AS xxx 0406**
	800	AS xxx 0408**
	1000	AS xxx 0410**
	1200	AS xxx 0412**
	1400	AS xxx 0414**
	1600	AS xxx 0416**
	1800	AS xxx 0418**
	2000	AS xxx 0420**
600	600	AS xxx 0606**
	800	AS xxx 0608**
	1000	AS xxx 0610**
	1200	AS xxx 0612**
	1400	AS xxx 0614**
	1600	AS xxx 0616**
	1800	AS xxx 0618**
	2000	AS xxx 0620**
800	600	AS xxx 0806**
	800	AS xxx 0808**
	1000	AS xxx 0810**
	1200	AS xxx 0812**
	1400	AS xxx 0814**
	1600	AS xxx 0816**
	1800	AS xxx 0818**
	2000	AS xxx 0820**
1000	1800	AS xxx 1018**
	2000	AS xxx 1020**
1200	1800	AS xxx 1218**
	2000	AS xxx 1220**
1400	1800	AS xxx 1418**
	2000	AS xxx 1420**

Solid Door	Useful Area	
	↔	↕
	mm	mm
SSAS KP0406	220	420
SSAS KP0408	220	620
SSAS KP0410	220	820
SSAS KP0412	220	1020
SSAS KP0414	220	1220
SSAS KP0416	220	1420
SSAS KP0418	220	1620
SSAS KP0420	220	1820
SSAS KP0606	420	420
SSAS KP0608	420	620
SSAS KP0610	420	820
SSAS KP0612	420	1020
SSAS KP0614	420	1220
SSAS KP0616	420	1420
SSAS KP0618	420	1620
SSAS KP0620	420	1820
SSAS KP0806	620	420
SSAS KP0808	620	620
SSAS KP0810	620	820
SSAS KP0812	620	1020
SSAS KP0814	620	1220
SSAS KP0816	620	1420
SSAS KP0818	620	1620
SSAS KP0820	620	1820
SSAS KP1018	320 + 320	1620
SSAS KP1020	320 + 320	1820
SSAS KP1218	420 + 420	1620
SSAS KP1220	420 + 420	1820
SSAS KP1418	520 + 520	1620
SSAS KP1420	520 + 520	1820

Mounting Plate	Dimensions	
	↔	↕
	mm	mm
AS TS0406	300	500
AS TS0408	300	700
AS TS0410	300	900
AS TS0412	300	1100
AS TS0414	300	1300
AS TS0416	300	1500
AS TS0418	300	1700
AS TS0420	300	1900
AS TS0606	500	500
AS TS0608	500	700
AS TS0610	500	900
AS TS0612	500	1100
AS TS0614	500	1300
AS TS0616	500	1500
AS TS0618	500	1700
AS TS0620	500	1900
AS TS0806	700	500
AS TS0808	700	700
AS TS0810	700	900
AS TS0812	700	1100
AS TS0814	700	1300
AS TS0816	700	1500
AS TS0818	700	1700
AS TS0820	700	1900
AS TS1018	900	1700
AS TS1020	900	1900
AS TS1218	1100	1700
AS TS1220	1100	1900
AS TS1418	1300	1700
AS TS1420	1300	1900

Width	Depth	Reference
A	C	
mm	mm	
400	400	AS xxx 04**40
	500	AS xxx 04**50
	600	AS xxx 04**60
	800	AS xxx 04**80
600	400	AS xxx 06**40
	500	AS xxx 06**50
	600	AS xxx 06**60
	800	AS xxx 06**80
800	400	AS xxx 08**40
	500	AS xxx 08**50
	600	AS xxx 08**60
	800	AS xxx 08**80
1000	400	AS xxx 10**40
	500	AS xxx 10**50
	600	AS xxx 10**60
	800	AS xxx 10**80
1200	400	AS xxx 12**40
	500	AS xxx 12**50
	600	AS xxx 12**60
	800	AS xxx 12**80
1400	400	AS xxx 14**40
	500	AS xxx 14**50
	600	AS xxx 14**60
	800	AS xxx 14**80


Bottom Cover Plate	Dimensions	
	↔	↗
	mm	mm
SSAS BS0440	394	340
SSAS BS0450	394	440
SSAS BS0460	394	540
SSAS BS0480	394	740
SSAS BS0640	594	340
SSAS BS0650	594	440
SSAS BS0660	594	540
SSAS BS0680	594	740
SSAS BS0840	794	340
SSAS BS0850	794	440
SSAS BS0860	794	540
SSAS BS0880	794	740
SSAS BS1040	994	340
SSAS BS1050	994	440
SSAS BS1060	994	540
SSAS BS1080	994	740
SSAS BS1240	1194	340
SSAS BS1250	1194	440
SSAS BS1260	1194	540
SSAS BS1280	1194	740
SSAS BS1440	1394	340
SSAS BS1450	1394	440
SSAS BS1460	1394	540
SSAS BS1480	1394	740

SOLID DOOR

Reference	Width	Height	Wide	Length	Useful Area				Door	Lock Type	Hinge	Weight
	A	B	X1	Y1	W1	W11*	W12*	H1				
	mm	mm	mm	mm	mm	mm	mm	mm	pcs	*	pcs	kg
SSAS KP 0406	400	600	391	588	220	-	-	420	1	I	2	3.2
SSAS KP 0408	400	800	391	788	220	-	-	620	1	I	2	4.2
SSAS KP 0410	400	1000	391	988	220	-	-	820	1	I	2	5.2
SSAS KP 0412	400	1200	391	1188	220	-	-	1020	1	I	2	6.3
SSAS KP 0414	400	1400	391	1388	220	-	-	1220	1	I	3	7.3
SSAS KP 0416	400	1600	391	1588	220	-	-	1420	1	I	3	8.3
SSAS KP 0418	400	1800	391	1788	220	-	-	1620	1	I	3	9.3
SSAS KP 0420	400	2000	391	1988	220	-	-	1820	1	I	3	10.4
SSAS KP 0606	600	600	591	588	420	-	-	420	1	I	2	4.7
SSAS KP 0608	600	800	591	788	420	-	-	620	1	I	2	6.2
SSAS KP 0610	600	1000	591	988	420	-	-	820	1	I	2	7.7
SSAS KP 0612	600	1200	591	1188	420	-	-	1020	1	I	2	9.2
SSAS KP 0614	600	1400	591	1388	420	-	-	1220	1	I	3	10.7
SSAS KP 0616	600	1600	591	1588	420	-	-	1420	1	I	3	12.2
SSAS KP 0618	600	1800	591	1788	420	-	-	1620	1	I	3	13.7
SSAS KP 0620	600	2000	591	1988	420	-	-	1820	1	I	3	15.2
SSAS KP 0806	800	600	791	588	620	-	-	420	1	I	2	6.2
SSAS KP 0808	800	800	791	788	620	-	-	620	1	I	2	8.2
SSAS KP 0810	800	1000	791	988	620	-	-	820	1	I	2	10.2
SSAS KP 0812	800	1200	791	1188	620	-	-	1020	1	I	2	12.2
SSAS KP 0814	800	1400	791	1388	620	-	-	1220	1	I	3	14.1
SSAS KP 0816	800	1600	791	1588	620	-	-	1420	1	I	3	16.1
SSAS KP 0818	800	1800	791	1788	620	-	-	1620	1	I	3	18.1
SSAS KP 0820	800	2000	791	1988	620	-	-	1820	1	I	3	20.1
SSAS KP 1018	1000	1800	991	1788	-	320	320	1620	2	I	3+3	23.8
SSAS KP 1020	1000	2000	991	1988	-	320	320	1820	2	I	3+3	26.4
SSAS KP 1218	1200	1800	1191	1788	-	420	420	1620	2	I	3+3	28.1
SSAS KP 1220	1200	2000	1191	1988	-	420	420	1820	2	I	3+3	31.2
SSAS KP 1418	1400	1800	1391	1788	-	520	520	1620	2	I	3+3	32.5
SSAS KP 1420	1400	2000	1391	1988	-	520	520	1820	2	I	3+3	36.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	Scotch-brite brushed
Thickness	2 mm

Supply Includes	
Lock	
Hinges	
* I: Escutcheon Rod-latch	

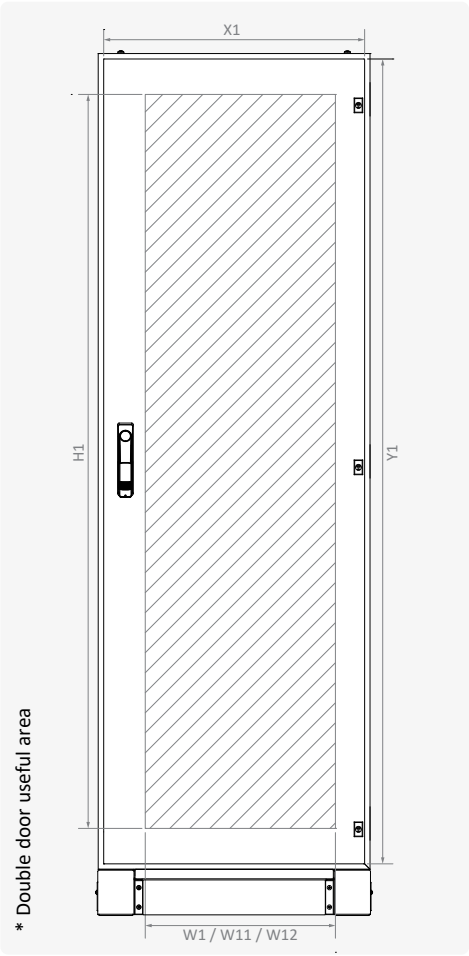


REAR PANEL

Reference	Width	Height	Wide	Length	Useful Area		Weight
	A	B	X1	Y1	W1	H1	
	mm	mm	mm	mm	mm	mm	kg
SSMS ST 0406	400	600	399	599	310	510	4.2
SSMS ST 0408	400	800	399	799	310	710	5.4
SSMS ST 0410	400	1000	399	999	310	910	6.6
SSMS ST 0412	400	1200	399	1199	310	1110	7.8
SSMS ST 0414	400	1400	399	1399	310	1310	9.0
SSMS ST 0416	400	1600	399	1599	310	1510	10.2
SSMS ST 0418	400	1800	399	1799	310	1710	11.4
SSMS ST 0420	400	2000	399	1999	310	1910	12.6
SSMS ST 0606	600	600	599	599	510	510	5.9
SSMS ST 0608	600	800	599	799	510	710	7.6
SSMS ST 0610	600	1000	599	999	510	910	9.2
SSMS ST 0612	600	1200	599	1199	510	1110	10.9
SSMS ST 0614	600	1400	599	1399	510	1310	12.6
SSMS ST 0616	600	1600	599	1599	510	1510	14.2
SSMS ST 0618	600	1800	599	1799	510	1710	15.9
SSMS ST 0620	600	2000	599	1999	510	1910	17.6
SSMS ST 0806	800	600	799	599	710	510	7.6
SSMS ST 0808	800	800	799	799	710	810	9.7
SSMS ST 0810	800	1000	799	999	710	910	11.8
SSMS ST 0812	800	1200	799	1199	710	1110	14.0
SSMS ST 0814	800	1400	799	1399	710	1410	16.1
SSMS ST 0816	800	1600	799	1599	710	1510	18.3
SSMS ST 0818	800	1800	799	1799	710	1710	20.4
SSMS ST 0820	800	2000	799	1999	710	1910	22.5
SSMS ST 1018	1000	1800	999	1799	910	1710	24.9
SSMS ST 1020	1000	2000	999	1999	910	1910	27.5
SSMS ST 1218	1200	1800	1199	1799	1110	1710	29.4
SSMS ST 1220	1200	2000	1199	1999	1110	1910	32.5
SSMS ST 1418	1400	1800	1399	1799	1310	1710	33.9
SSMS ST 1420	1400	2000	1399	1999	1310	1910	37.4

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	Scotch-brite brushed
Thickness	1.5 mm

Supply Includes	
Rear panel fasteners	

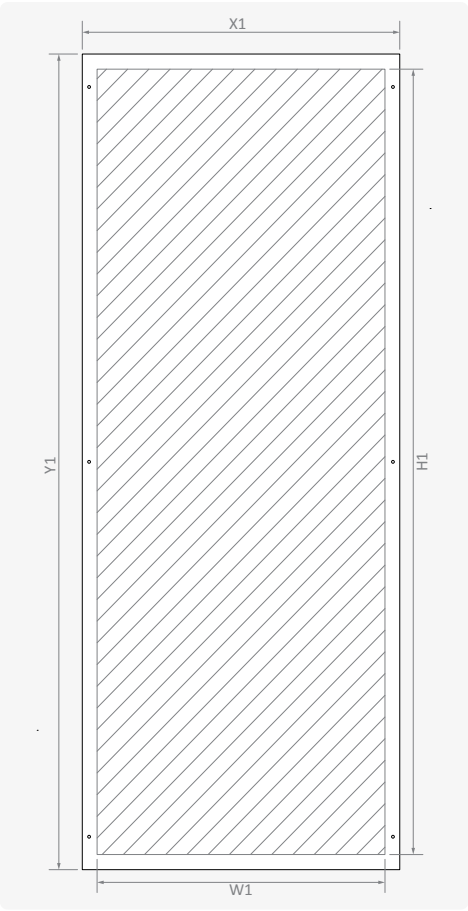

PLINTH


Reference	Width	Depth	Wide	Length	Height	Connection			Weight kg
	A	C	X1	Z1	Y1	X2	Z2	Z21	
	mm	mm	mm	mm	mm	mm	mm	mm	
SSAS Bx000404 1	400	400	400	345	100	320	240	-	5.3
SSAS Bx000405 1	400	500	400	445	100	320	340	-	6.4
SSAS Bx000406 1	400	600	400	545	100	320	440	220	7.4
SSAS Bx000408 1	400	800	400	745	100	320	640	320	9.5
SSAS Bx000604 1	600	400	600	345	100	520	240	-	6.8
SSAS Bx000605 1	600	500	600	445	100	520	340	-	8.2
SSAS Bx000606 1	600	600	600	545	100	520	440	220	9.3
SSAS Bx000608 1	600	800	600	745	100	520	640	320	11.8
SSAS Bx000804 1	800	400	800	345	100	720	240	-	8.0
SSAS Bx000805 1	800	500	800	445	100	720	340	-	9.5
SSAS Bx000806 1	800	600	800	545	100	720	440	220	10.9
SSAS Bx000808 1	800	800	800	745	100	720	640	320	13.8
SSAS Bx001004 1	1000	400	1000	345	100	920	240	-	9.4
SSAS Bx001005 1	1000	500	1000	445	100	920	340	-	11.2
SSAS Bx001006 1	1000	600	1000	545	100	920	440	220	12.6
SSAS Bx001008 1	1000	800	1000	745	100	920	640	320	15.9
SSAS Bx001204 1	1200	400	1200	345	100	1120	240	-	10.8
SSAS Bx001205 1	1200	500	1200	445	100	1120	340	-	12.9
SSAS Bx001206 1	1200	600	1200	545	100	1120	440	220	14.5
SSAS Bx001208 1	1200	800	1200	745	100	1120	640	320	18.2
SSAS Bx001404 1	1400	400	600+800	345	100	520+720	240	-	14.8
SSAS Bx001405 1	1400	500	600+800	445	100	520+720	340	-	17.7
SSAS Bx001406 1	1400	600	600+800	545	100	520+720	440	220	20.2
SSAS Bx001408 1	1400	800	600+800	745	100	520+720	640	320	25.6
SSAS Bx000404 2	400	400	400	345	200	320	240	-	6.9
SSAS Bx000405 2	400	500	400	445	200	320	340	-	8.2
SSAS Bx000406 2	400	600	400	545	200	320	440	220	9.3
SSAS Bx000408 2	400	800	400	745	200	320	640	320	11.7
SSAS Bx000604 2	600	400	600	345	200	520	240	-	8.8
SSAS Bx000605 2	600	500	600	445	200	520	340	-	10.3
SSAS Bx000606 2	600	600	600	545	200	520	440	220	11.6
SSAS Bx000608 2	600	800	600	745	200	520	640	320	14.4
SSAS Bx000804 2	800	400	800	345	200	720	240	-	10.4
SSAS Bx000805 2	800	500	800	445	200	720	340	-	12.1
SSAS Bx000806 2	800	600	800	545	200	720	440	220	13.5
SSAS Bx000808 2	800	800	800	745	200	720	640	320	16.7
SSAS Bx001004 2	1000	400	1000	345	200	920	240	-	12.2
SSAS Bx001005 2	1000	500	1000	445	200	920	340	-	14.2
SSAS Bx001006 2	1000	600	1000	545	200	920	440	220	15.8
SSAS Bx001008 2	1000	800	1000	745	200	920	640	320	19.3
SSAS Bx001204 2	1200	400	1200	345	200	1120	240	-	14.0
SSAS Bx001205 2	1200	500	1200	445	200	1120	340	-	16.2
SSAS Bx001206 2	1200	600	1200	545	200	1120	440	220	17.9
SSAS Bx001208 2	1200	800	1200	745	200	1120	640	320	21.8
SSAS Bx001404 2	1400	400	600+800	345	200	520+720	240	-	14.8
SSAS Bx001405 2	1400	500	600+800	445	200	520+720	340	-	17.7
SSAS Bx001406 2	1400	600	600+800	545	200	520+720	440	220	20.2
SSAS Bx001408 2	1400	800	600+800	745	200	520+720	640	320	25.6

Characteristics

■ Material	Stainless Steel 304L (EN 10088 1.4307)
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.5 mm

Supply Includes

■ Cover plates and mounting screws
■ Plinth mounting fasteners

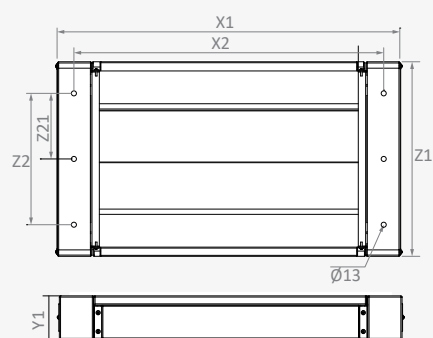

BOTTOM COVER PLATE


Reference	Width	Depth	Wide	Length	Weight kg
	A	C	X	Y	
	mm	mm	mm	mm	
SSAS BS 0440	400	400	395	340	2.1
SSAS BS 0450	400	500	395	440	2.7
SSAS BS 0460	400	600	395	540	3.3
SSAS BS 0480	400	800	395	740	4.6
SSAS BS 0640	600	400	595	340	3.2
SSAS BS 0650	600	500	595	440	4.1
SSAS BS 0660	600	600	595	540	5.0
SSAS BS 0680	600	800	595	740	6.9
SSAS BS 0840	800	400	795	340	4.2
SSAS BS 0850	800	500	795	440	5.5
SSAS BS 0860	800	600	795	540	6.7
SSAS BS 0880	800	800	795	740	9.2
SSAS BS 1040	1000	400	995	340	5.3
SSAS BS 1050	1000	500	995	440	6.9
SSAS BS 1060	1000	600	995	540	8.4
SSAS BS 1080	1000	800	995	740	11.6
SSAS BS 1240	1200	400	1195	340	6.4
SSAS BS 1250	1200	500	1195	440	8.3
SSAS BS 1260	1200	600	1195	540	10.1
SSAS BS 1280	1200	800	1195	740	13.9
SSAS BS 1440	1400	400	1395	340	7.4
SSAS BS 1450	1400	500	1395	440	9.6
SSAS BS 1460	1400	600	1395	540	11.8
SSAS BS 1480	1400	800	1395	740	16.2

Characteristics

■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Scotch-brite brushed
■ Thickness	2 mm

Supply Includes

■ Bottom cover plates fasteners

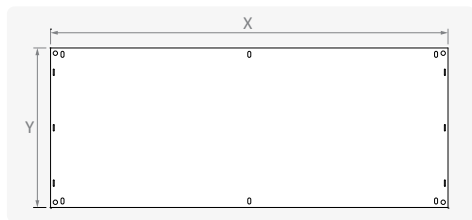

RAIN CANOPY


Reference	Width	Depth	Wide	Length	Connection		Weight kg
	A	C	X1	Z1	X2	Z2	
	mm	mm	mm	mm	mm	mm	
SSAS SP 04 40	400	400	450	440	366	307	3.8
SSAS SP 04 50	400	500	450	540	366	407	4.6
SSAS SP 04 60	400	600	450	640	366	507	5.3
SSAS SP 04 80	400	800	450	840	366	707	6.7
SSAS SP 06 40	600	400	650	440	566	307	4.8
SSAS SP 06 50	600	500	650	540	566	407	5.8
SSAS SP 06 60	600	600	650	640	566	507	6.7
SSAS SP 06 80	600	800	650	840	566	707	8.5
SSAS SP 08 40	800	400	850	440	766	307	5.9
SSAS SP 08 50	800	500	850	540	766	407	6.9
SSAS SP 08 60	800	600	850	640	766	507	8.0
SSAS SP 08 80	800	800	850	840	766	707	10.2
SSAS SP 10 40	1000	400	1050	440	966	307	6.9
SSAS SP 10 50	1000	500	1050	540	966	407	8.1
SSAS SP 10 60	1000	600	1050	640	966	507	9.4
SSAS SP 10 80	1000	800	1050	840	966	707	12.0
SSAS SP 12 40	1200	400	1250	440	1166	307	7.9
SSAS SP 12 50	1200	500	1250	540	1166	407	9.3
SSAS SP 12 60	1200	600	1250	640	1166	507	10.8
SSAS SP 12 80	1200	800	1250	840	1166	707	13.8
SSAS SP 14 40	1400	400	1450	440	1366	307	8.9
SSAS SP 14 50	1400	500	1450	540	1366	407	10.5
SSAS SP 14 60	1400	600	1450	640	1366	507	12.2
SSAS SP 14 80	1400	800	1450	840	1366	707	15.5

Characteristics

■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Scotch-brite brushed
■ Thickness	1.2 mm

Supply Includes

■ Mounting screws

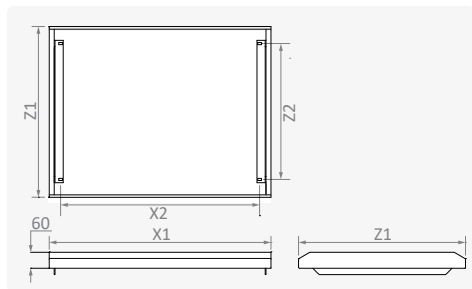

MOUNTING PLATE


Reference	Width	Height	Wide	Length	Connection				Connection	Weight
	A	B	X1	Y1	X2	Y2	X3	Y3	n	
	mm	mm	mm	mm	mm	mm	mm	mm	pcs	kg
AS TS 0406	400	600	302	502	241	400	260	-	4	3.3
AS TS 0408	400	800	302	702	241	600	260	-	4	4.5
AS TS 0410	400	1000	302	902	241	800	260	-	4	5.7
AS TS 0412	400	1200	302	1102	241	1000	260	-	4	6.9
AS TS 0414	400	1400	302	1302	241	1200	260	600	6	8.1
AS TS 0416	400	1600*	302	1502	241	1400	260	700	6	9.3
AS TS 0418	400	1800	302	1702	241	1600	260	800	6	10.5
AS TS 0420	400	2000	302	1902	241	1800	260	900	6	11.6
AS TS 0606	600	600	502	502	441	400	460	-	4	5.1
AS TS 0608	600	800	502	708	441	600	460	-	4	7.0
AS TS 0610	600	1000	502	902	441	800	460	-	4	8.7
AS TS 0612	600	1200	502	1102	441	1000	460	-	4	10.6
AS TS 0614	600	1400	502	1302	441	1200	460	600	6	12.4
AS TS 0616	600	1600*	502	1502	441	1400	460	700	6	14.2
AS TS 0618	600	1800	502	1702	441	1600	460	800	6	16.1
AS TS 0620	600	2000	502	1902	441	1800	460	900	6	17.9
AS TS 0806	800	600	702	502	641	400	660	-	4	6.9
AS TS 0808	800	800	702	702	641	600	660	-	4	9.3
AS TS 0810	800	1000	702	902	641	800	660	-	4	11.8
AS TS 0812	800	1200	702	1102	641	1000	660	-	4	14.3
AS TS 0814	800	1400	702	1302	641	1200	660	600	6	16.7
AS TS 0816	800	1600*	702	1402	641	1400	660	700	6	18.0
AS TS 0818	800	1800	702	1702	641	1600	660	800	6	21.7
AS TS 0820	800	2000	702	1902	641	1800	660	900	6	24.2
AS TS 1018	1000	1800	902	1702	841	1600	860	800	6	27.3
AS TS 1020	1000	2000	902	1902	841	1800	860	900	6	30.4
AS TS 1218	1200	1800	1102	1702	1041	1600	1060	800	6	32.9
AS TS 1220	1200	2000	1102	1902	1041	1800	1060	900	6	36.7
AS TS 1418	1400	1800	1302	1702	1241	1600	1260	800	6	38.5
AS TS 1420	1400	2000	1302	1902	1241	1800	1260	900	6	42.9

Characteristics

■ Material	DIN EN 10327 DX51D+Z galvanized
■ Thickness	2 mm


Supply Includes

■ Mounting screws
■ Carriage slide support and fasteners

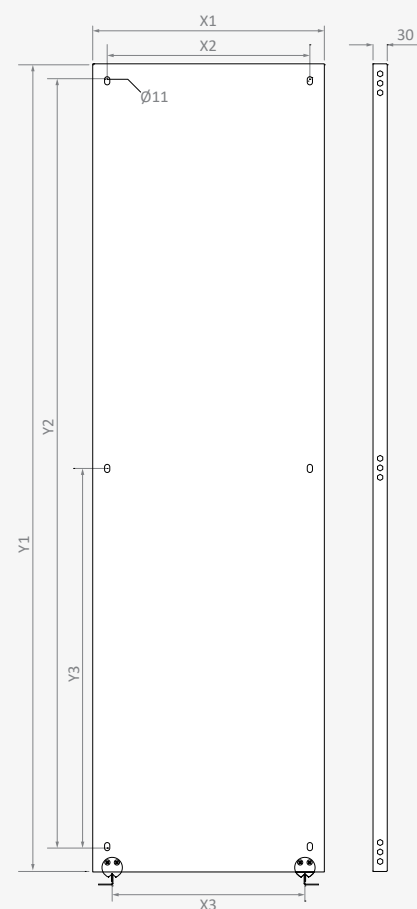

MOUNTING PLATE FIXING BRACKETS

Reference	Type	Connection	Weight	Characteristics
			kg	
MS FB 010	Front-Rear Frame Connection, Right/Left	Right/Left	0.1	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 2 mm
AS FB 012F	Front-Side Rail Connection, Right/Left	Right/Left	0.2	
AS FB 012FT-L	Front-Slide Support Connection, Left	Left	0.2	Supply Includes ■ Side rail mounting fasteners
AS FB 012FT-R	Front-Slide Support Connection, Right	Right	0.2	
AS FB 010	Side-Side Rail Connection, Right/Left	Right/Left	0.2	
AS FB 012ST-L	Side-Slide Support Connection, Left	Left	0.2	
AS FB 012ST-R	Side-Slide Support Connection, Right	Right	0.2	

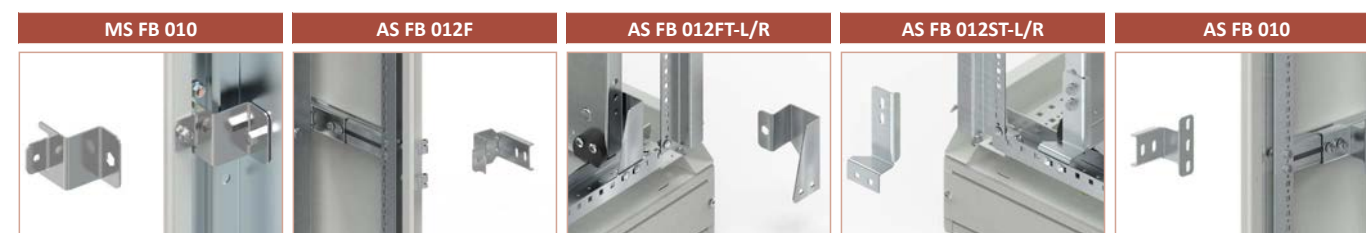

SIDE RAILS

Reference	Depth	Length	Connection		Weight	Characteristics
	C mm	Z1 mm	Z2 mm	Z3 mm	kg	
AS SR 040	400	224	211	192	0.2	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 1.5 mm
AS SR 050	500	324	311	292	0.3	
AS SR 060	600	424	411	392	0.4	Supply Includes ■ Mounting screws
AS SR 080	800	624	611	592	0.6	



CARRIAGE DEPTH SLIDE

Reference	Depth	Length	Connection	Connection	Weight	Characteristics
	C mm	Z1 mm	Z2 mm	n pcs	kg	
AS SRK 040	400	274	211	9	0.3	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 1.5 mm
AS SRK 050	500	374	311	14	0.5	
AS SRK 060	600	474	411	19	0.6	Supply Includes ■ Mounting screws
AS SRK 080	800	674	611	29	0.9	




EYE BOLT


Reference	Connection	Int. Diameter	Packet	Weight
			pcs/packet	kg/packet
AS AH 020	M12	Ø 30	4	1.0
Characteristics				
■ Material	C15E Forged steel			
■ Surface Finishing	Zinc coated Cr ³⁺ passivation			
■ Standards	DIN 580			



EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight	Characteristics
		mm ²	mm		pcs/packet	kg/packet	
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2	
KB TP 16093500		16	320	M8-M8	50	0.2	





TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

