



# TEMPA PANO

*Enclosures engineered...*

*"güvenilir  
çözüm ortağınız,  
"your reliable  
solution partner,"*

**HiT**  
HUMAN INTERFACE TECHNOLOGIES



[www.tempapano.com](http://www.tempapano.com)

**CATALOGUE 10**



#### HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1  
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE  
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49  
e-mail : sales@tempa.com.tr / satis@tempapano.com

#### TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF  
Tel : +44 (0) 1925 811 290  
e-mail : sales@tempapano.co.uk

#### TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE  
Tel : +33 (0) 4 74 42 53 74  
e-mail : contact@tempafrance.fr

#### R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA  
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097  
e-mail : office@rtselectro.ro

#### TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4  
Tel: +359 32 901760 Fax : +359 32 901777  
e-mail : office@tempabg.com



Characteristics

Material

- Sheet Steel (EN 10130 DC01)
- Body : 1.2 mm
- Door : 1.2 mm

Surface Finishing

- RAL7035w powder coating

IP Rating

- IP55 (TS 3033, EN 60529)

Others

- All welded construction
- Glazed door fixed with two screws
- Foamed-in door PU sealing gasket
- 135° concealed hinges
- Top and bottom gland plates
- One piece PE gasket for gland plate
- Ready for DIN rail fixing

On Request

- Custom sizes
- Custom colour
- Pre-punching
- Solid door
- Special mounting plate




Supply Includes






- Body
- Glazed door
- 2 pcs DIN rail fasteners
- 2 pcs gland plates with gasket

Complementary Accessories

- DIN rail
- Earthing cable
- 4 pcs wall brackets

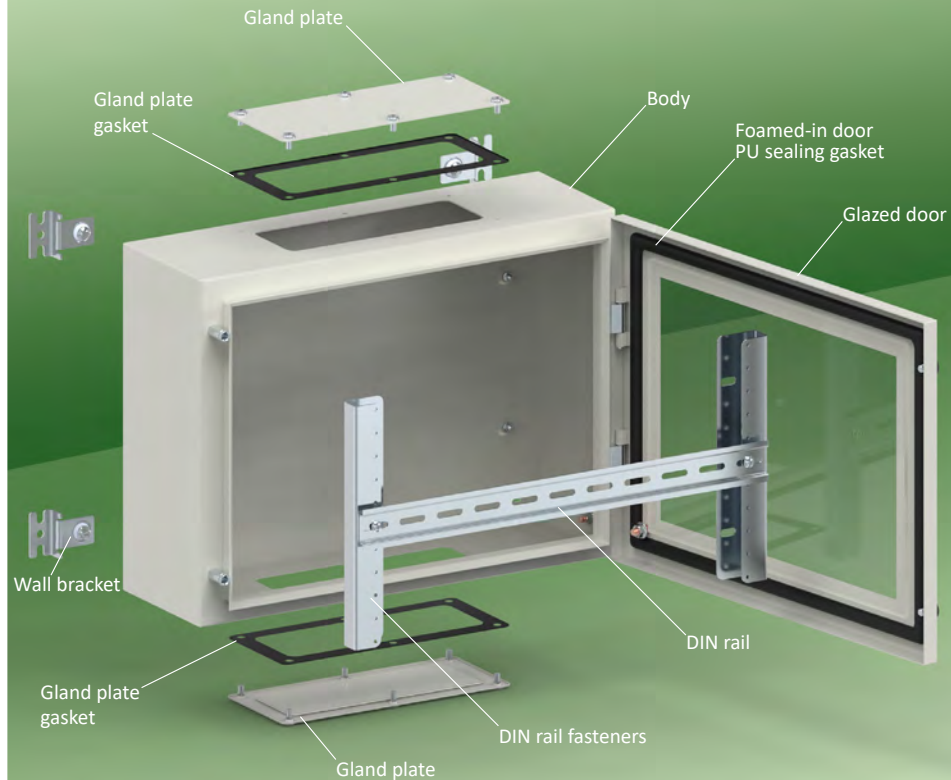



| Width | Height | Depth | Reference | Useful Area                                                                         |                                                                                     | Apparent Area                                                                       |                                                                                     | Cable Gland |                                                                                     |                                                                                     | Wall Mounting |     |         |     | DIN Rail Fixing                                                                     | Weight |
|-------|--------|-------|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|-----|---------|-----|-------------------------------------------------------------------------------------|--------|
| A     | B      | C     |           | Side                                                                                |                                                                                     |  |  | #           |  |  | Side          |     | Up/Down |     |  |        |
| mm    | mm     | mm    |           |  |  |                                                                                     |                                                                                     |             |                                                                                     |                                                                                     | mm            | mm  | pcs     | mm  |                                                                                     | mm     |
| 300   | 200    | 125   | TB 302012 | 150                                                                                 | 75                                                                                  | 200                                                                                 | 110                                                                                 | 2           | 260                                                                                 | 48                                                                                  | 324           | 158 | 258     | 224 | 225                                                                                 | 3.6    |
|       | 300    | 125   | TB 303012 | 250                                                                                 | 75                                                                                  | 200                                                                                 | 210                                                                                 | 2           | 260                                                                                 | 48                                                                                  | 324           | 258 | 258     | 324 | 2 x 225                                                                             | 4.6    |
| 400   | 200    | 125   | TB 402012 | 150                                                                                 | 75                                                                                  | 300                                                                                 | 110                                                                                 | 2           | 360                                                                                 | 48                                                                                  | 424           | 158 | 358     | 224 | 325                                                                                 | 4.5    |
|       | 300    | 150   | TB 403015 | 250                                                                                 | 100                                                                                 | 300                                                                                 | 210                                                                                 | 2           | 360                                                                                 | 73                                                                                  | 424           | 258 | 358     | 324 | 2 x 325                                                                             | 6.0    |
|       | 400    | 150   | TB 404015 | 350                                                                                 | 100                                                                                 | 300                                                                                 | 310                                                                                 | 2           | 360                                                                                 | 73                                                                                  | 424           | 358 | 358     | 424 | 2 x 325                                                                             | 7.5    |

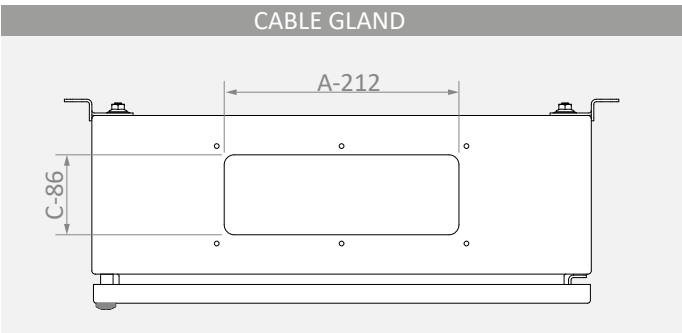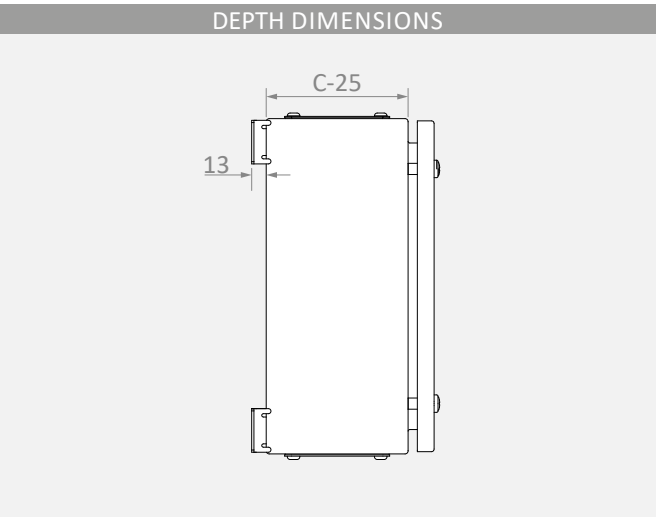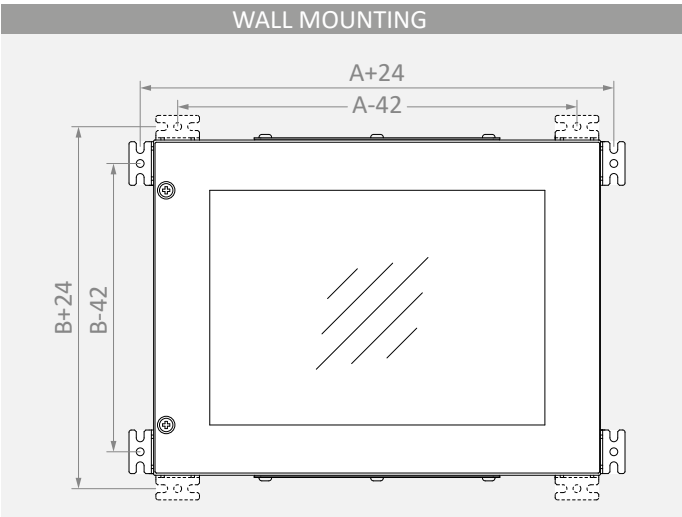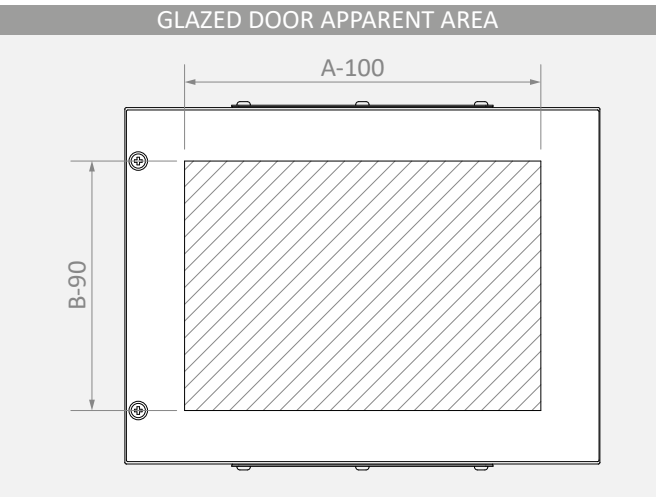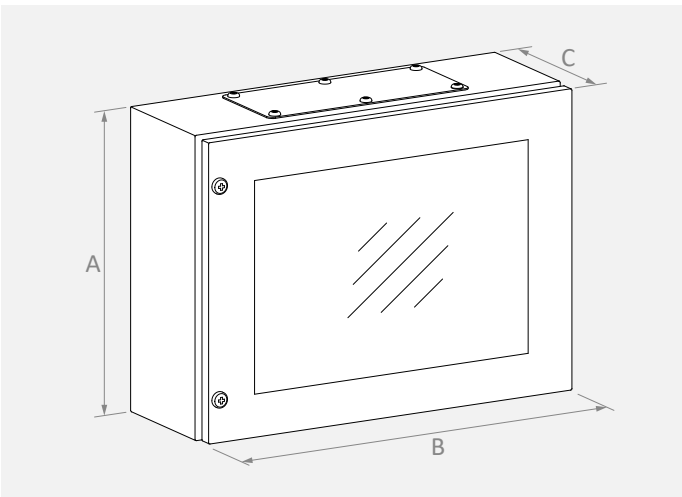

CABLE GLAND PLATE

| Reference   | Width   | Depth   | External Dimensions |          | Useful Area |          | Weight |
|-------------|---------|---------|---------------------|----------|-------------|----------|--------|
|             | A<br>mm | C<br>mm | X1<br>mm            | Z1<br>mm | X2<br>mm    | Z2<br>mm |        |
| TB GP 30 12 | 300     | 125     | 220                 | 94       | 188         | 64       | 0.25   |
| TB GP 40 12 | 400     | 125     | 220                 | 94       | 188         | 64       | 0.25   |
| TB GP 40 15 | 400     | 150     | 220                 | 94       | 188         | 64       | 0.25   |


| Characteristics     |                         | Supply Includes      |  |
|---------------------|-------------------------|----------------------|--|
| ■ Material          | DIN EN 10130 DC01 CCRS  | ■ One pece PE Conta  |  |
| ■ Surface Finishing | RAL7035w powder coating | ■ Mounting fasteners |  |
| ■ Thickness         | 1.5 mm                  |                      |  |

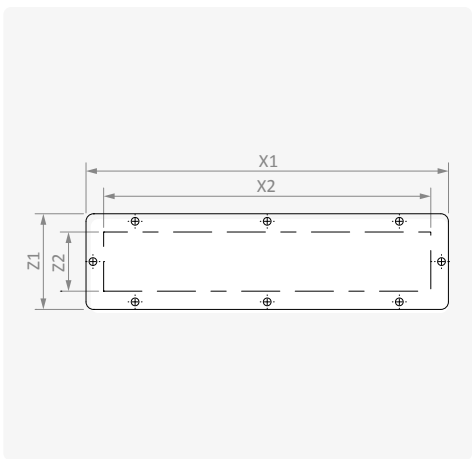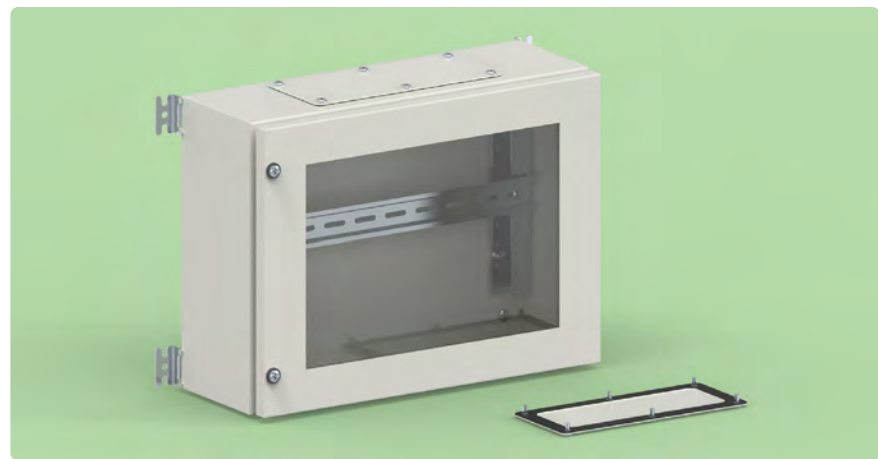

DIN RAILS


| Reference    | Width | Height | Hole   | Length | Weight |
|--------------|-------|--------|--------|--------|--------|
|              | mm    | mm     | Yes/No | m      | kg/pcs |
| MR KL 500603 | 35    | 7.5    | No     | 2      | 0.7    |
| MR KL 500604 | 35    | 7.5    | Yes    | 2      | 0.7    |
| MR KL 500609 | 35    | 15     | Yes    | 2      | 1.2    |

| Characteristics     |                                         |
|---------------------|-----------------------------------------|
| ■ Material          | DIN EN 10130 DC01 CCRS                  |
| ■ Surface Finishing | Zinc coated Cr <sup>3</sup> passivation |
| ■ Standards         | DIN EN 60715                            |

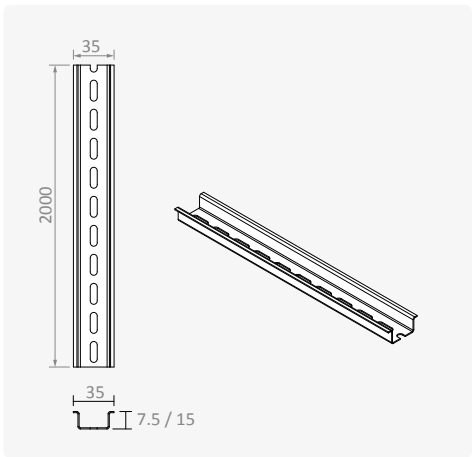



WALL BRACKETS


| Reference  | Packet     | Weight    | Characteristics     |                                         | Supply Includes        |
|------------|------------|-----------|---------------------|-----------------------------------------|------------------------|
|            | pcs/packet | kg/packet | ■ Material          | DIN EN 10130 DC01 CCRS                  |                        |
| AK KL 0010 | 4          | 0.16      | ■ Surface Finishing | Zinc coated Cr <sup>3</sup> passivation | ■ Wall mounting screws |
|            |            |           | ■ Thickness         | 2 mm                                    |                        |

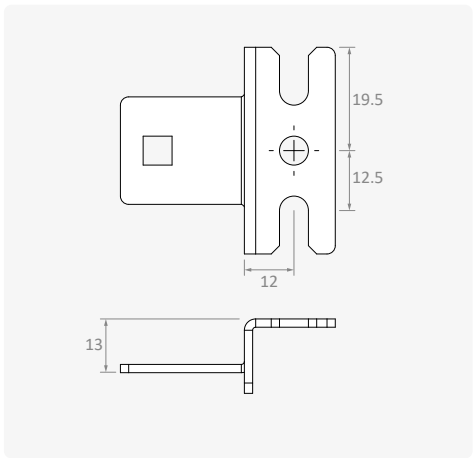

EARTHING CABLE

| Reference       | Material                                  | Cross-Section   | Length | Connection | Packet     | Weight    |
|-----------------|-------------------------------------------|-----------------|--------|------------|------------|-----------|
|                 |                                           | mm <sup>2</sup> | mm     |            | pcs/packet | kg/packet |
| KB OZ 061908080 | Yellow - Green, Isolated copper conductor | 6               | 190    | M8-M8      | 10         | 0.16      |

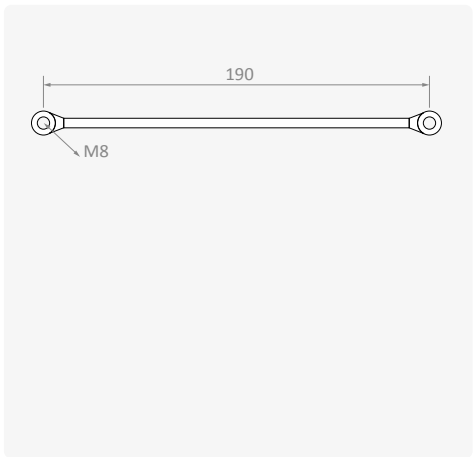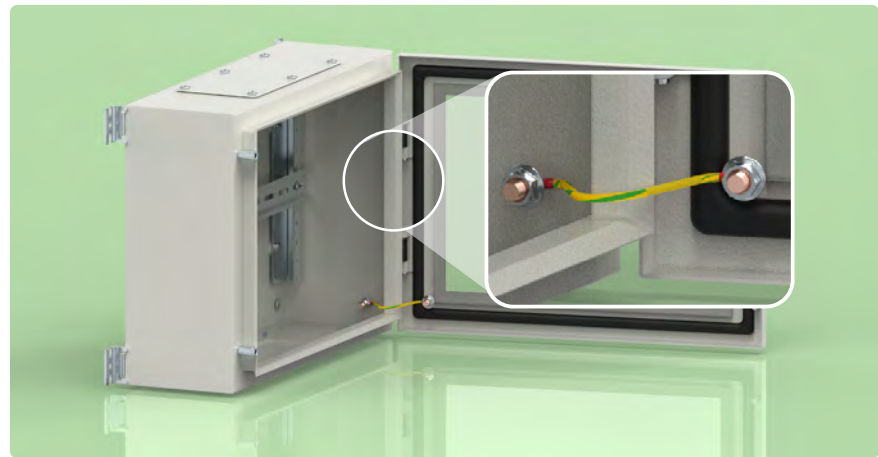



# TEMPA PANO

*Enclosures engineered...*



*“your reliable  
solution partner,”*

