



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES





HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

- Sheet steel (EN 10130 DC01)
- Body : 1.2 mm
- Cover : 1.2 mm
- Galvanized steel (EN 10346 DX51D+Z)
- Mounting plate : 1.5 mm

Surface Finishing


- RAL7035w Powder coating

Protection Degree





- IP54 Cabinet Side (TS 3033, EN 60529)
- IP34 Ambient Side (TS 3033, EN 60529)

Others

- Digital control unit
- Programmable door and alarm output contact
- Two different power in same size/cut-out
- Large fin space for minimum dust accumulation
- Fast and easy installation
- Condensate drain output
- Maximum air inlet-outlet distance in cabinet side for optimum cooling performance
- Optional easy fixing ambient side dust filter kit
- Stainless steel versions on request

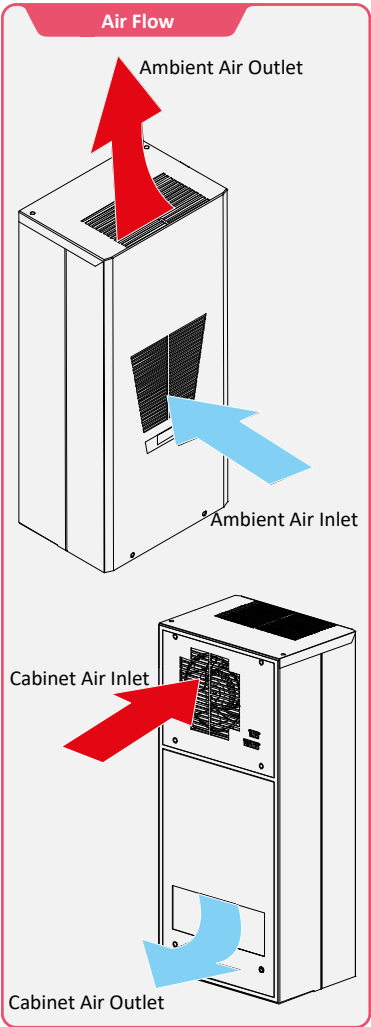

		TCY0500	TCY0700	TCY0900
Cooling Capacity (EN 14511)	A35 / A35	500 W	700 W	900 W
	A35 / A50	300 W	520 W	740 W
Voltage - Phase - Frequency		230 V 1~ 50 Hz		
Power Consumption	A35 / A35	390 W	390 W	530 W
Maximum Running Current	A35 / A50	2.4 A	2.5 A	3.5 A
Starting Current		10 A	17 A	21 A
Unimpeded Air Flow (Internal - External)		346 m³/h - 500 m³/h	650 m³/h - 650 m³/h	650 m³/h - 650 m³/h
Control Type		Digital , door switch and alarm output		
Cabinet Temperature Limits		20°C - 45°C		
Ambient Temperature Limits		20°C - 55°C		
Refrigerant Type		R 134a		
Refrigerant Amount		180 g	240 g	350 g
Dimensions (Width/Height/Depth)		292mm / 592mm / 215mm	337mm / 742mm / 242mm	
Weight		24 kg	30 kg	35 kg
Protection Degree (TS 3033, EN 60529)	Cabinet Side	IP 54		
	Ambient Side	IP 34		
Unit Construction		RAL 7035 Electrostatic Powder Coated Sheet Steel (optional Stainless) and Galvanized Sheet Steel		

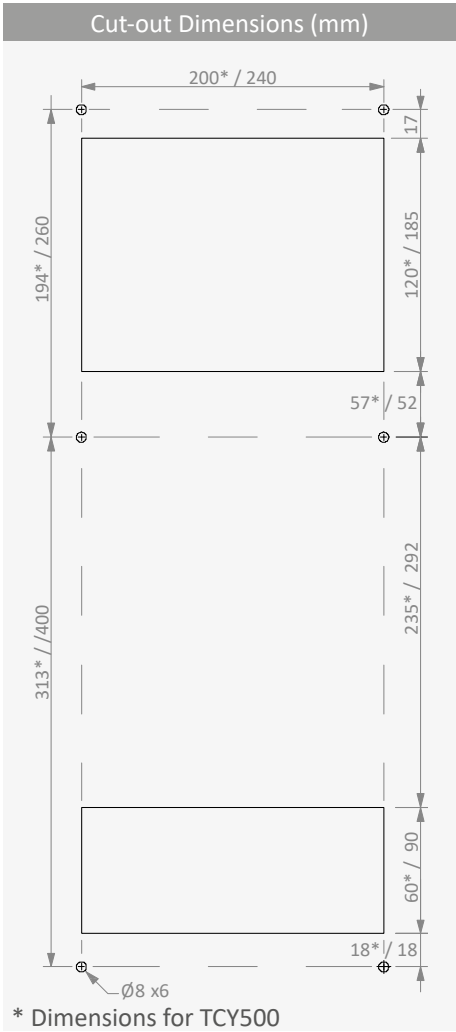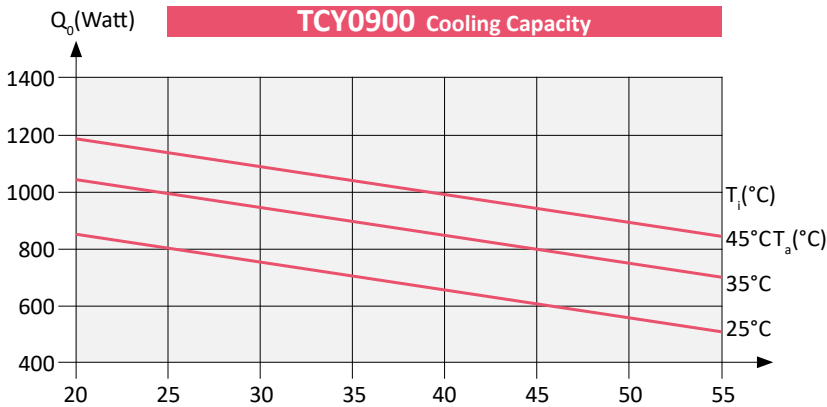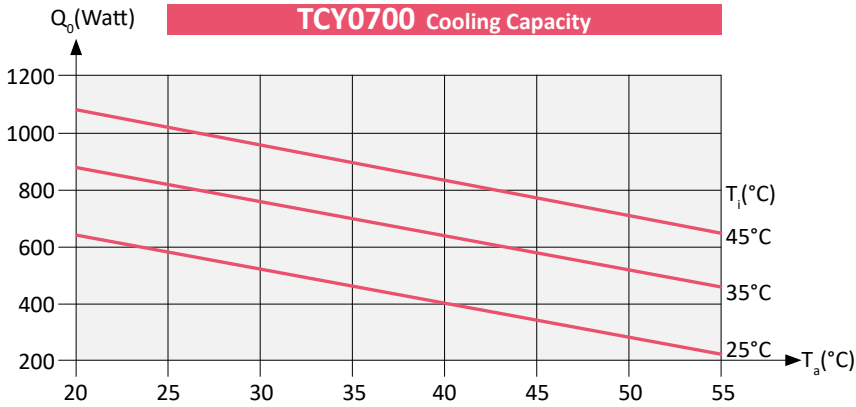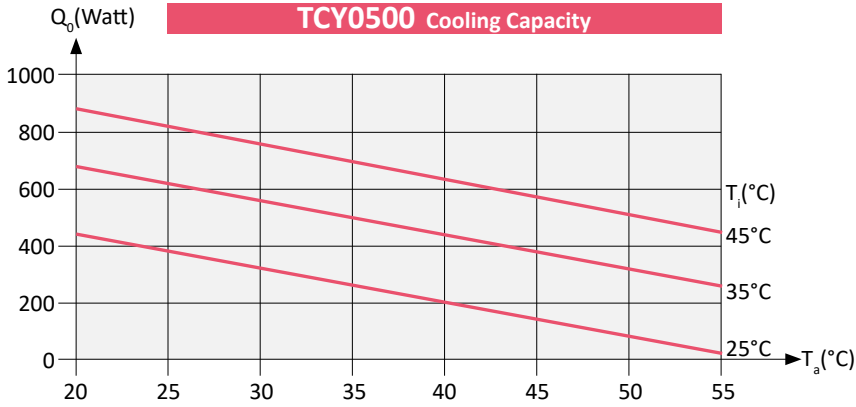

Q₀ : Cooling Capacity
T_a : Ambient Temperature
T_i : Cabinet Internal Temperature


- Characteristics
- Material

Sheet steel (EN 10130 DC01)
■ Body : 1.2 mm
■ Cover : 1.2 mm
Galvanized steel (EN 10346 DX51D+Z)
■ Mounting plate : 1.5 mm
- Surface Finishing




■ RAL7035w Powder coating
- Protection Degree

■ IP54 Cabinet Side (TS 3033, EN 60529)
■ IP34 Ambient Side (TS 3033, EN 60529)
- Others

■ Digital control unit
■ Programmable door and alarm output contact
■ Two different power in same size/cut-out
■ Large fin space for minimum dust accumulation
■ Fast and easy installation
■ Condensate drain output
■ Maximum air inlet-outlet distance in cabinet side for optimum cooling performance
■ Optional easy fixing ambient side dust filter kit
■ Stainless steel versions on request

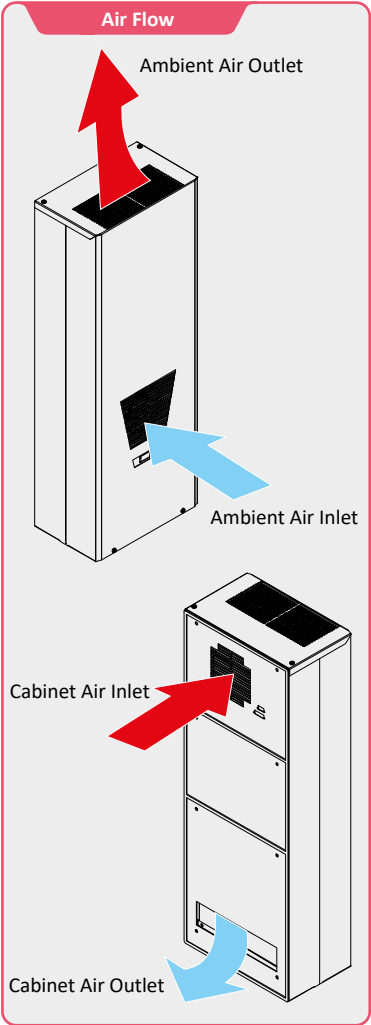

		TCY1500	TCY2000
Cooling Capacity (EN 14511)	A35 / A35	1500 W	2000 W
	A35 / A50	1200 W	1550 W
Voltage - Phase - Frequency		230 V 1~ 50 Hz	
Power Consumption	A35 / A35	860 W	1070 W
Maximum Running Current	A35 / A50	5.7 A	6.5 A
Starting Current		22 A	22 A
Unimpeded Air Flow (Internal - External)		850 m³/h - 850 m³/h	850 m³/h - 1200 m³/h
Control Type		Digital , door switch and alarm output	
Cabinet Temperature Limits		20°C - 45°C	
Ambient Temperature Limits		20°C - 55°C	
Refrigerant Type		R 134a	
Refrigerant Amount		400 g	600 g
Dimensions (Width/Height/Depth)		436mm / 1200mm / 266mm	
Weight		51 kg	59 kg
Protection Degree (TS 3033, EN 60529)	Cabinet Side	IP 54	
	Ambient Side	IP 34	
Unit Construction		RAL 7035 Electrostatic Powder Coated Sheet Steel (optional Stainless) and Galvanized Sheet Steel	

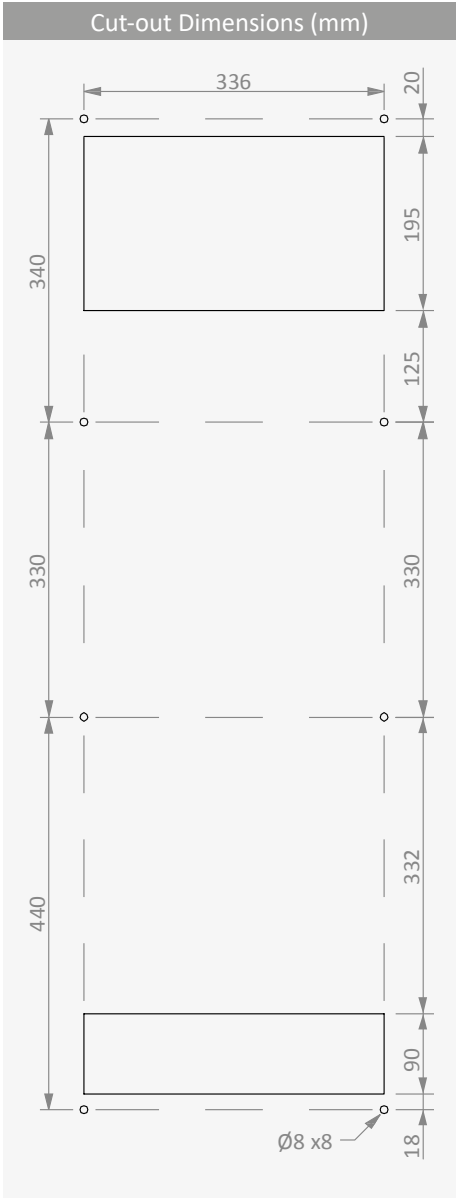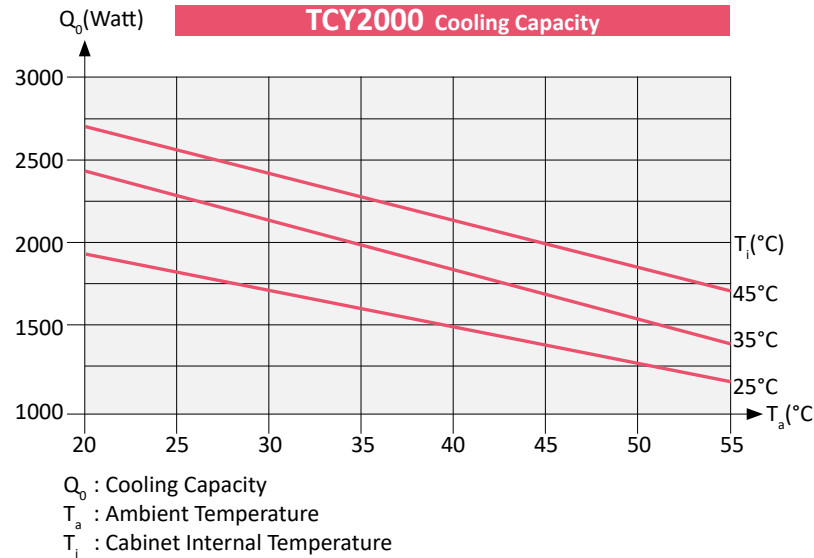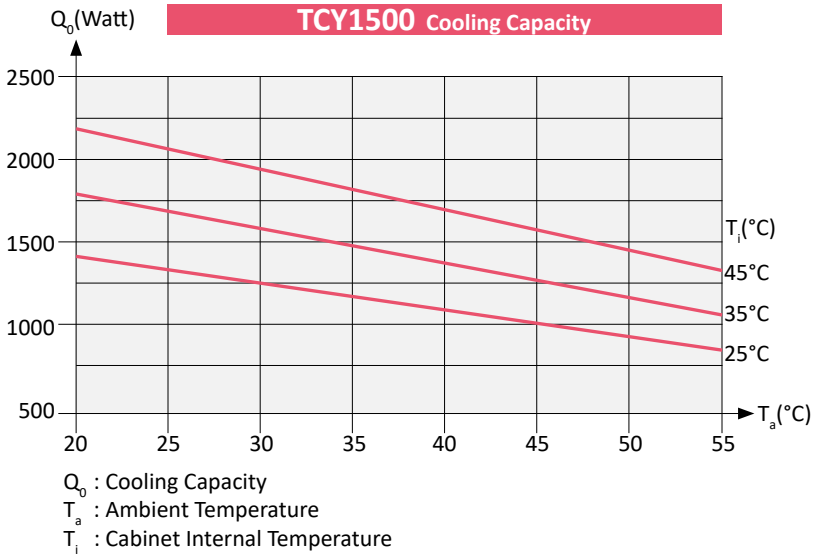


- Characteristics
- Material

Sheet steel (EN 10130 DC01)
■ Body : 1.2 mm
■ Cover : 1.2 mm
Galvanized steel (EN 10346 DX51D+Z)
■ Mounting plate : 1.5 mm
- Surface Finishing




■ RAL7035w Powder coating
- Protection Degree


■ IP54 Cabinet Side (TS 3033, EN 60529)
■ IP34 Ambient Side (TS 3033, EN 60529)
- Others

■ Digital control unit
■ Programmable door and alarm output contact
■ Two different power in same size/cut-out
■ Large fin space for minimum dust accumulation
■ Fast and easy installation
■ Condensate drain output
■ Maximum air inlet-outlet distance in cabinet side for optimum cooling performance
■ Optional easy fixing ambient side dust filter kit
■ Stainless steel versions on request

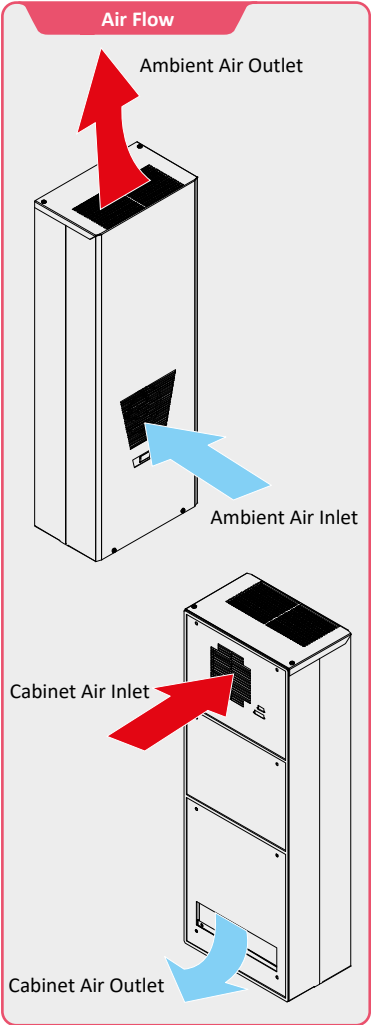

		TCY3000	TCY4000
Cooling Capacity (EN 14511)	A35 / A35	3200 W	4350 W
	L35 / L50	1620 W	3650 W
Voltage - Phase - Frequency		230 V 1~ 50 Hz	
Power Consumption	A35 / A35	1570 W	1700 W
Maximum Running Current	A35 / A50	9.5 A	9.0 A
Starting Current		28 A	30 A
Unimpeded Air Flow (Internal - External)		1200 m³/h - 1200 m³/h	1200 m³/h - 1200 m³/h
Control Type		Digital , door switch and alarm output	
Cabinet Temperature Limits		20°C - 45°C	
Ambient Temperature Limits		20°C - 55°C	
Refrigerant Type		R 134a	
Refrigerant Amount		800 g	1200 g
Dimensions (Width/Height/Depth)		436mm / 1300mm / 365mm	
Weight		75 kg	83 kg
Protection Degree (TS 3033, EN 60529)	Cabinet Side	IP 54	
	Ambient Side	IP 34	
Unit Construction		RAL 7035 Electrostatic Powder Coated Sheet Steel (optional Stainless) and Galvanized Sheet Steel	

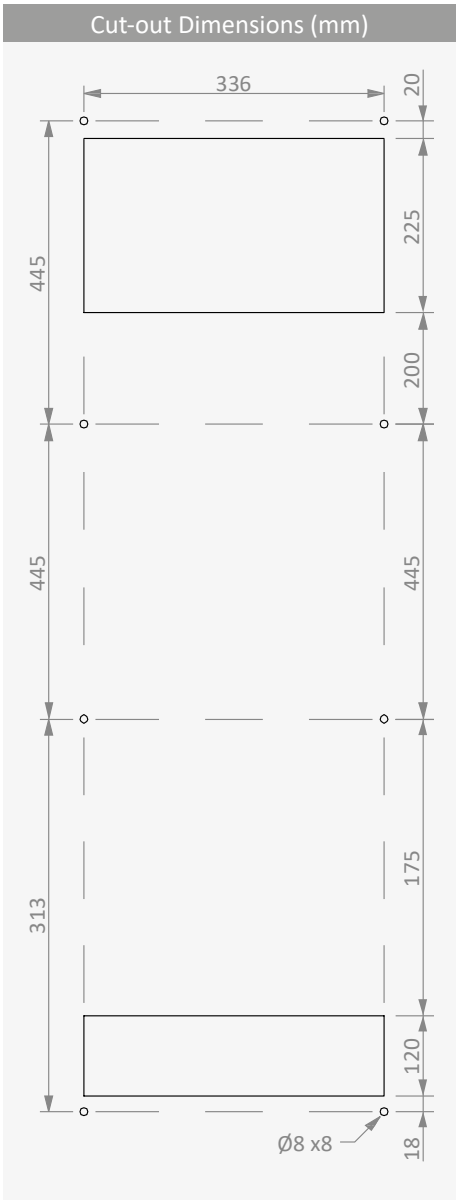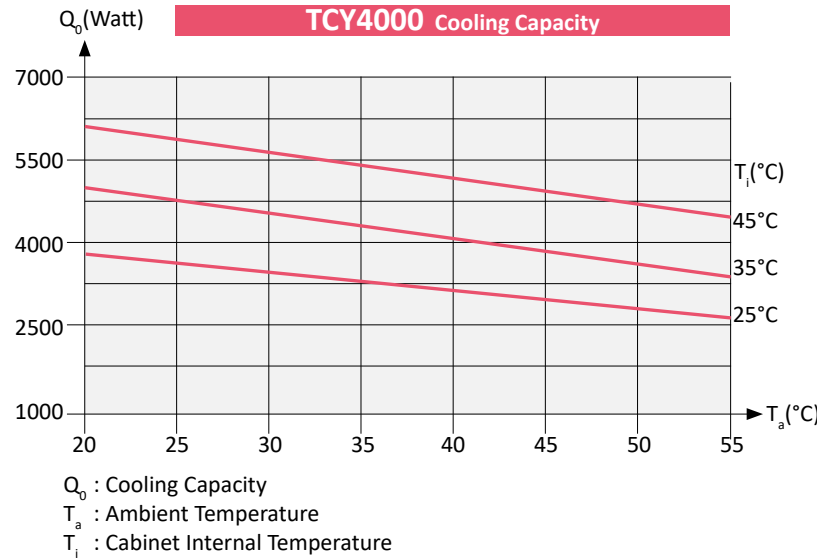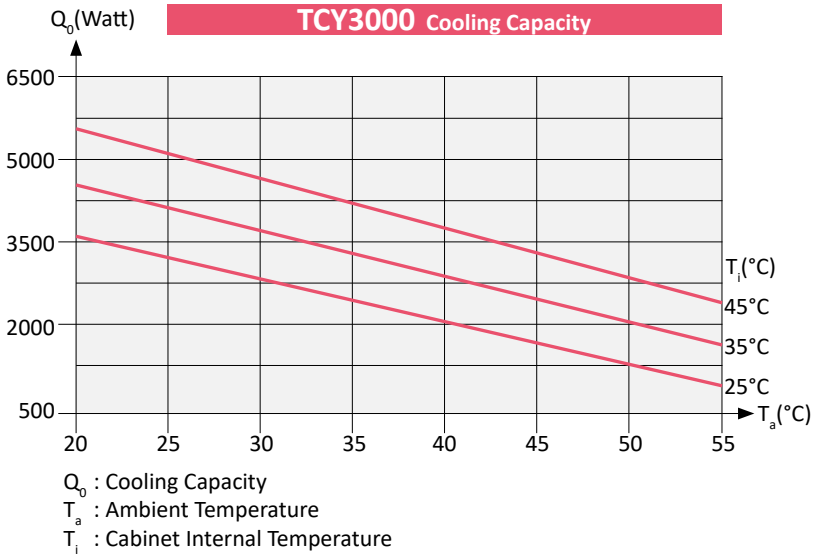



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

