



TEMPA PANO

Enclosures engineered...

*"güvenilir
çözüm ortağınız,
"your reliable
solution partner,"*

HiT
HUMAN INTERFACE TECHNOLOGIES



www.tempapano.com

CATALOGUE 10



HEAD OFFICE / FACTORY

Makine İhtisas Organize Sanayi Bölgesi 2.Cadde No:1
Demirciler Mahallesi 41455 Dilovası / Kocaeli - TÜRKİYE
Tel : +90 262 642 63 40 Fax : +90 262 642 63 48 / 49
e-mail : sales@tempa.com.tr / satis@tempapano.com

TEMPA PANO UK

Tempa Pano House, 2 Goddard Road, Astmoor Industrial Estate, Runcorn, WA7 1QF
Tel : +44 (0) 1925 811 290
e-mail : sales@tempapano.co.uk

TEMPA FRANCE SAS

36, rue de l'industrie ZI La Tuilerie, 01540 VONNAS / FRANCE
Tel : +33 (0) 4 74 42 53 74
e-mail : contact@tempafrance.fr

R.T.S ELECTRO SRL

43A, Mehadia Street RO-060541, BUCHAREST 6 / ROMANIA
Tel : +40 21 260 1021 Tel : +40 21 260 1022 Fax : +40 21 222 3097
e-mail : office@rtselectro.ro

TEMPA SISTEM BG

Bulgaria/ Plovdiv, 4018 Markovsko shose - Plovdiv South 382 Gabieli Warehouse A4
Tel: +359 32 901760 Fax : +359 32 901777
e-mail : office@tempabg.com



Characteristics

Material

- AL 4600 Series
- Sheet Steel (AL)

Surface Finishing

- IP 55 Protection
- RAL 7015 Corner Connections
- RAL 7042 Corner Caps

Other

- Aluminum Profile Body: Lightweight and robust structure for easy transport and installation.
- Integrated Handle Side Profile: Offers ergonomic use and ease of handling.
- Front Sheet Brackets: Allow tool-free installation of the front sheet, enabling quick and easy assembly.
- DIN Rail Mounting Brackets: Ensure secure and stable component installation.

On Request

- Custom sizes
- Custom colour





Advantages

- Automation and Control Systems: Provide reliable and efficient solutions for industrial automation projects.
- Machinery Manufacturing: Ensure high performance in machine control and monitoring systems.
- Energy Management: Stand out with durability and protection level in energy distribution and management systems.
- Medical Devices: Preferred in medical applications requiring precision and reliability.



Width	Height	Depth	Reference	Front Sheet				Back Door			Installation Depth	Weight
A	B	C		Width	Height	Useful Area		Lock	Lock Type	Hinge	D	
mm	mm	mm		W	H	X	Y				D	
				mm	mm	mm	mm	pcs.	*	pcs.	mm	kg
293	293	103	TP252509	250	250	230	230	1	C	3	78	2.6
343	293	103	TP302509	300	250	280	230	1	C	3	78	2.9
343	343	103	TP303009	300	300	280	280	1	C	3	78	3.2
443	343	103	TP403009	400	300	380	280	2	C	3	78	3.8
443	443	103	TP404009	400	400	380	380	2	C	3	78	4.7
543	443	103	TP504009	500	400	480	380	2	C	3	78	5.4
543	543	103	TP505009	500	500	480	480	2	C	3	78	6.2
643	543	103	TP605009	600	500	580	480	2	C	3	78	7.1
643	643	103	TP606009	600	600	580	580	2	C	3	78	8.0

* C:Quarter Turn

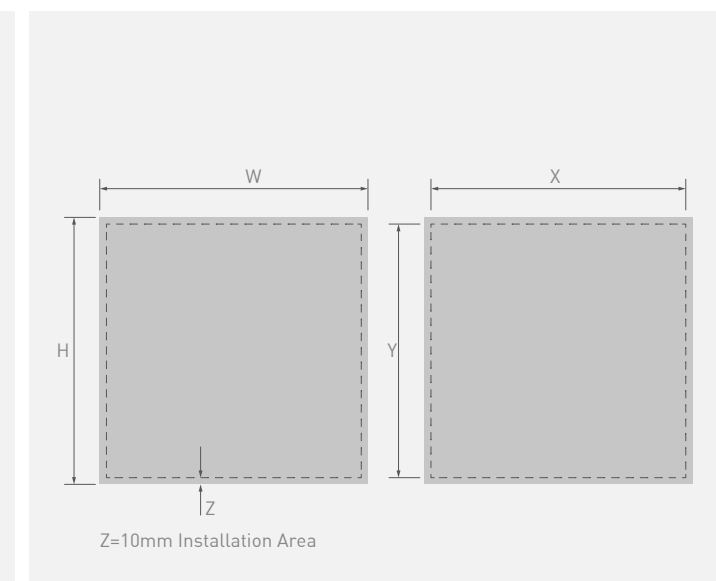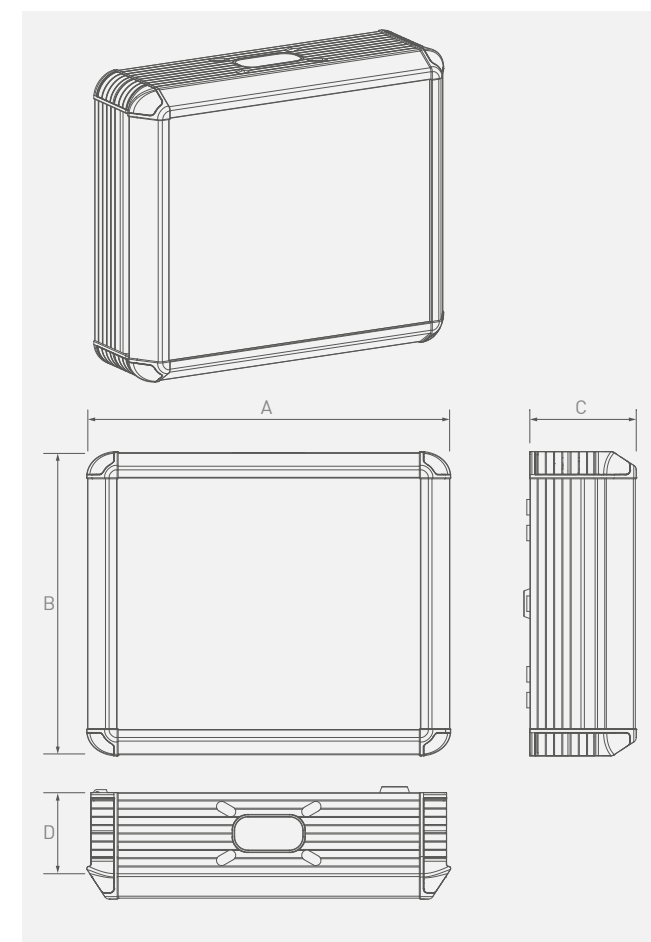

Characteristics

Material

- AL 4600 Series
- Sheet Steel (AL)

Surface Finishing

- IP 55 Protection
- RAL 7015 Corner Connections
- RAL 7042 Corner Caps

Other

- Aluminum Profile Body: Lightweight and robust structure for easy transport and installation.
- Integrated Handle Side Profile: Offers ergonomic use and ease of handling.
- Front Sheet Brackets: Allow tool-free installation of the front sheet, enabling quick and easy assembly.
- DIN Rail Mounting Brackets: Ensure secure and stable component installation.

On Request

- Custom sizes
- Custom colour





Advantages

- Automation and Control Systems: Provide reliable and efficient solutions for industrial automation projects.
- Machinery Manufacturing: Ensure high performance in machine control and monitoring systems.
- Energy Management: Stand out with durability and protection level in energy distribution and management systems.
- Medical Devices: Preferred in medical applications requiring precision and reliability.



Width A	Height B	Depth C	Reference	Front Sheet				Back Door			Installation Depth D	Weight
				Width W	Height H	Useful Area X Y		Lock	Lock Type	Hinge		
				mm	mm	mm	mm	pcs.	*	pcs.		
293	293	163	TP252515	250	250	230	230	1	C	3	138	3.3
343	293	163	TP302515	300	250	280	230	1	C	3	138	3.6
343	343	163	TP303015	300	300	280	280	1	C	3	138	4.0
443	343	163	TP403015	400	300	380	280	2	C	3	138	4.7
443	443	163	TP404015	400	400	380	380	2	C	3	138	5.6
543	443	163	TP504015	500	400	480	380	2	C	3	138	6.4
543	543	163	TP505015	500	500	480	480	2	C	3	138	7.3
643	543	163	TP605015	600	500	580	480	2	C	3	138	8.2
643	643	163	TP606015	600	600	580	580	2	C	3	138	9.2

* C:Quarter Turn

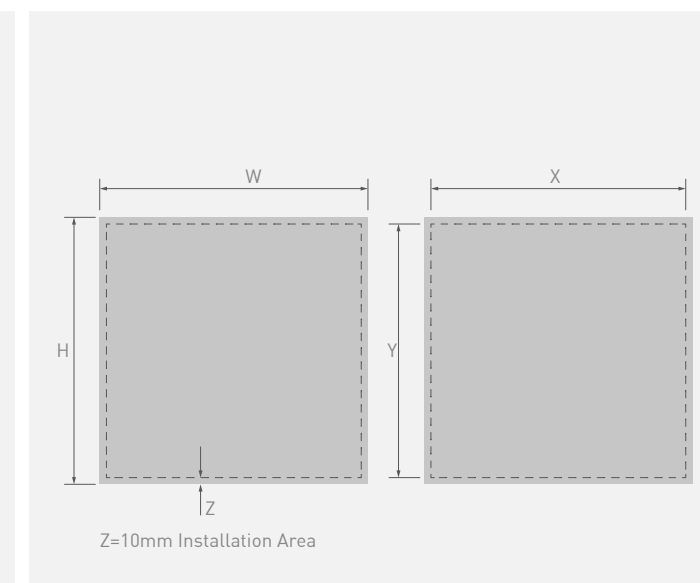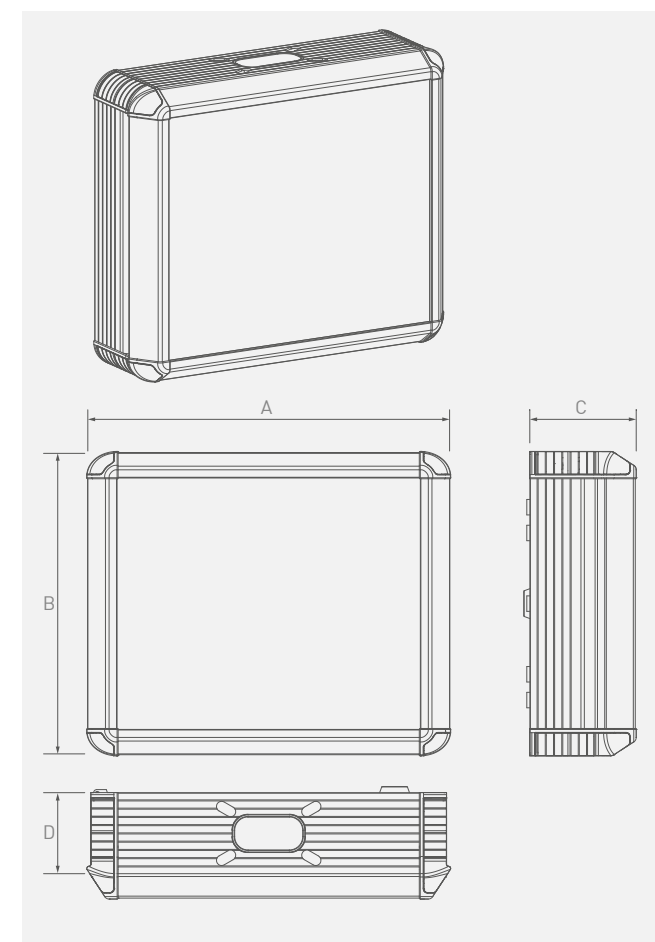

Characteristics

Material

- AL 4600 Series
- Sheet Steel (AL)

Surface Finishing

- IP 55 Protection
- RAL 7035 Texture

Other

- Optional Mounting Plate
- Optional cover option with deeper usage area


On Request

- Custom sizes
- Custom colour



Advantages



- Automation and Control Systems: Provide reliable and efficient solutions for industrial automation projects.
- Machinery Manufacturing: Ensure high performance in machine control and monitoring systems.
- Energy Management: Stand out with durability and protection level in energy distribution and management systems.
- Medical Devices: Preferred in medical applications requiring precision and reliability.

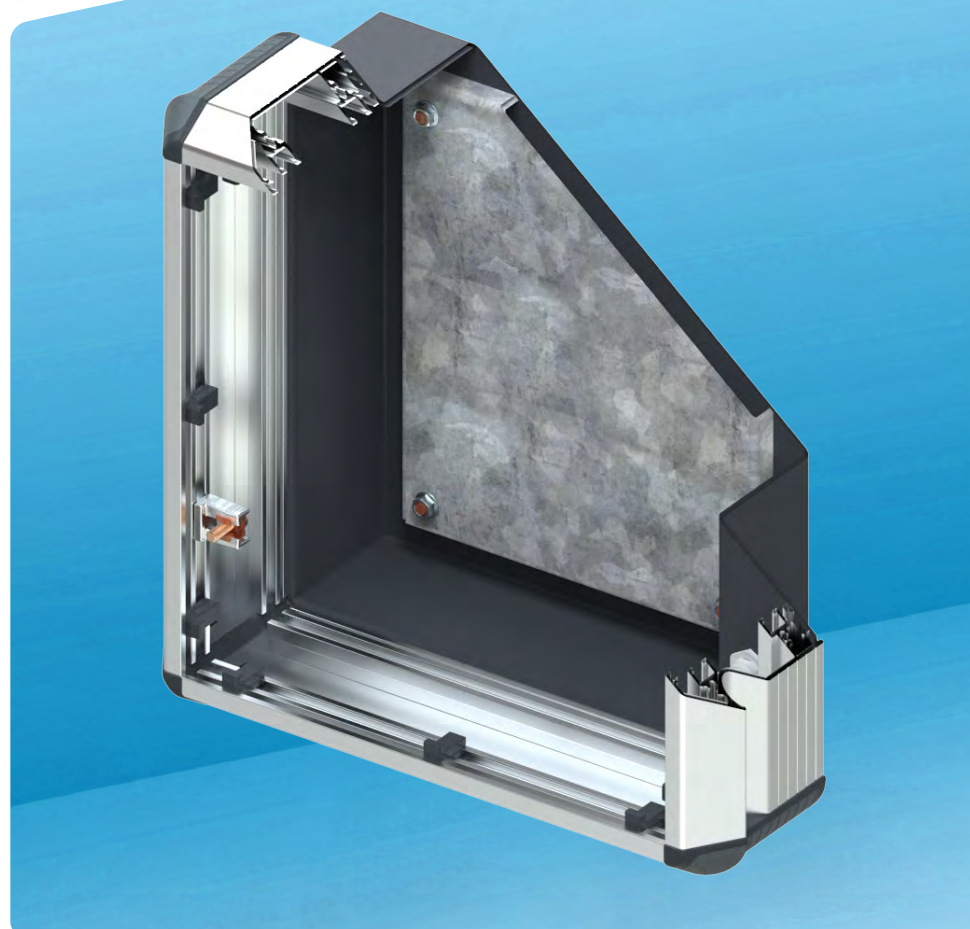

Width	Height	Depth	Reference	Back Door			Back Door		
				Width	Height	Depth	Lock	Lock Type	Hinge
				X	Y	Z	pcs.	*	pcs.
mm	mm	mm		mm	mm	mm			
443	443	181	TP404017	356	397	80	2	C	5
543	443	181	TP504017	456	397	80	2	C	5
543	543	181	TP505017	456	497	80	2	C	5
643	543	181	TP605017	556	497	80	2	C	5
643	643	181	TP606017	556	597	80	2	C	5
443	443	241	TP404023	356	397	80	2	C	5
543	443	241	TP504023	456	397	80	2	C	5
543	543	241	TP505023	456	497	80	2	C	5
643	543	241	TP605023	556	497	80	2	C	5
643	643	241	TP606023	556	597	80	2	C	5

* C:Quarter Turn

* C:Quarter Turn

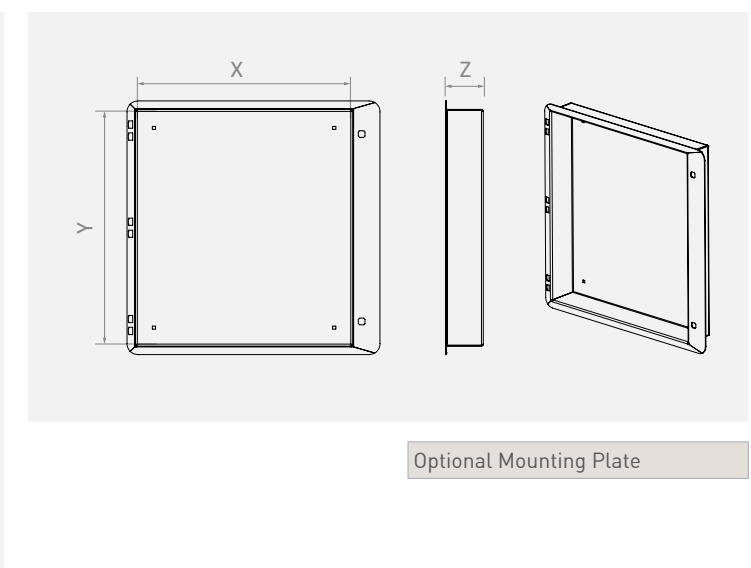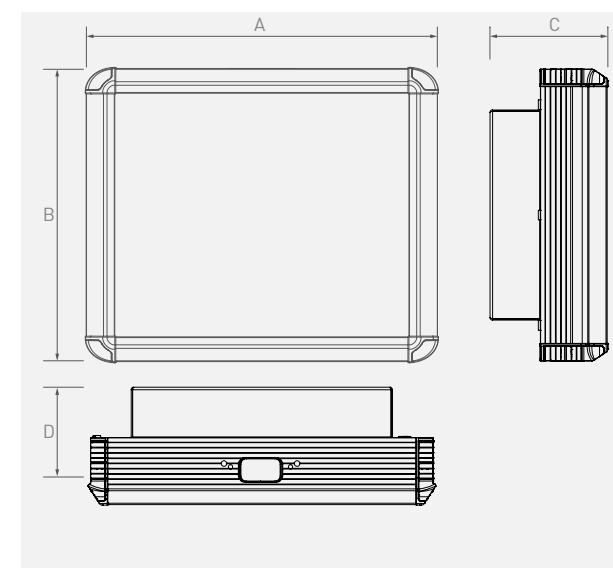

Optional Mounting Plate

TP090 Depth Connection Profile				TP150 Depth Connection Profile				TP090 Klemens Mounting Bracket				TP150 Klemens Mounting Bracket				Klemens Mounting Bracket			
W	H	D	Reference	W	H	D	Reference	W	H	D	Reference	W	H	D	Reference	W	H	D	Reference
mm	mm	mm		mm	mm	mm		mm	mm	mm		mm	mm	mm		mm	mm	mm	
20	20	75	TP-135DP090	20	20	135	TP-135DP150	20	20	75	TP-090BR077	20	20	135	TP-150BR137	18	30	22	TP-BR223018

Characteristics

Material

- AL 4600 Series
- Sheet Steel (AL)

Surface Finishing


- IP 55 Protection
- RAL 7015 Corner Connections
- RAL 7042 Corner Caps

Other

- Aluminum Profile Body: Lightweight and robust structure for easy transport and installation.
- Integrated Handle Side Profile: Offers ergonomic use and ease of handling.
- Front Sheet Brackets: Allow tool-free installation of the front sheet, enabling quick and easy assembly.
- DIN Rail Mounting Brackets: Ensure secure and stable component installation.

On Request

- Custom sizes
- Custom colour


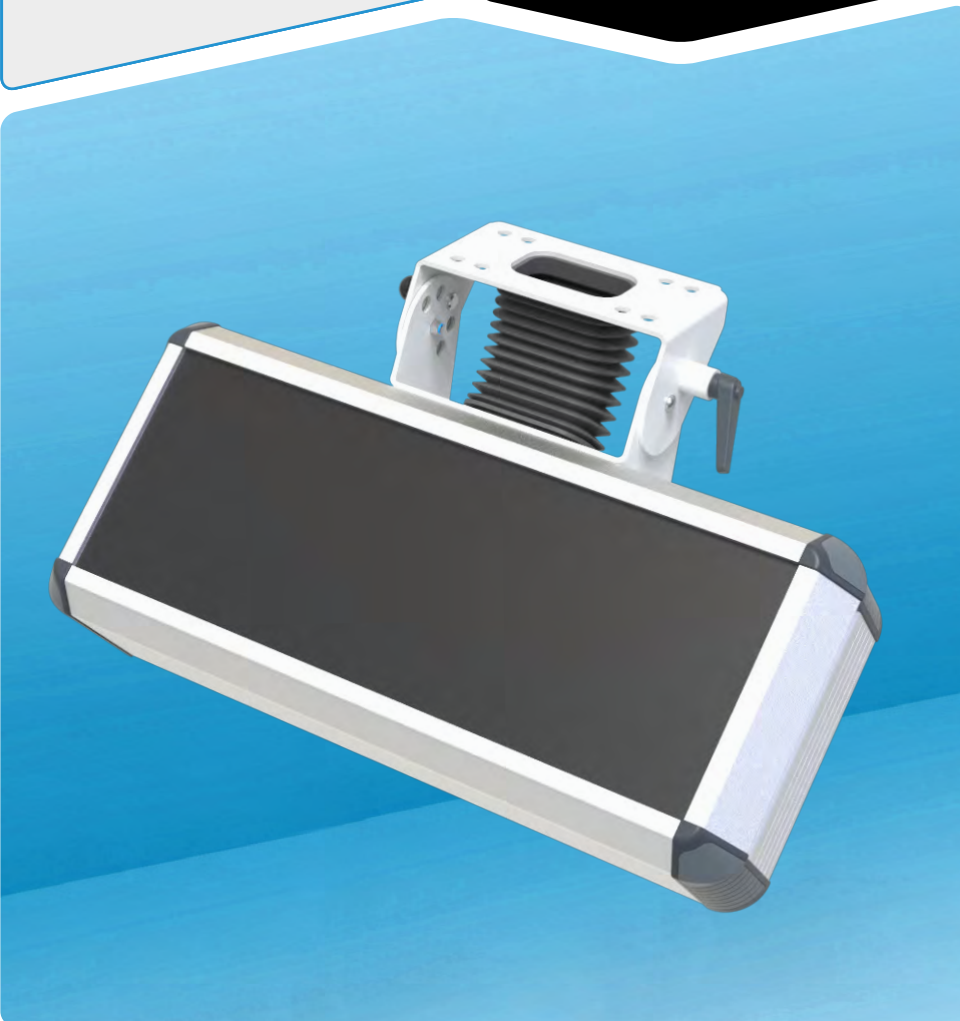



Advantages

- Automation and Control Systems: Provide reliable and efficient solutions for industrial automation projects.
- Machinery Manufacturing: Ensure high performance in machine control and monitoring systems.
- Energy Management: Stand out with durability and protection level in energy distribution and management systems.
- Medical Devices: Preferred in medical applications requiring precision and reliability.

Width	Height	Depth	Reference	Front Sheet				Back Door			Installation Depth	Weight
				Width	Height	Useful Area		Lock	Lock Type	Hinge		
				W	H	X	Y	pcs.	*	pcs.		
mm	mm	mm		mm	mm	mm	mm				mm	kg
443	193	103	TP401509	400	150	380	130	2	C	5	78	3.5
543	193	103	TP501509	500	150	380	130	2	C	5	78	3.9
643	193	103	TP601509	600	150	480	130	2	C	5	78	4.3
443	193	163	TP401515	400	150	380	130	2	C	5	138	4.1
543	193	163	TP501515	500	150	380	130	2	C	5	138	4.6
643	193	163	TP601515	600	150	480	130	2	C	5	138	5.1

* C:Quarter Turn

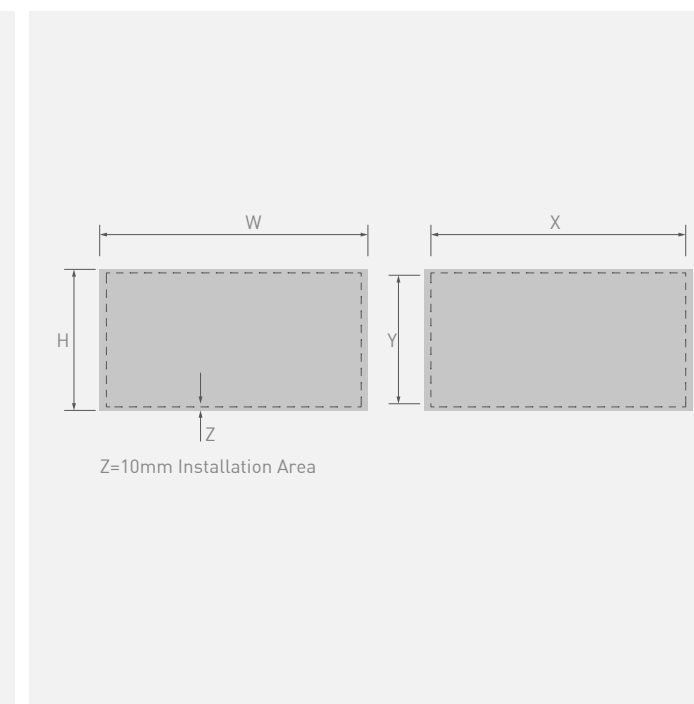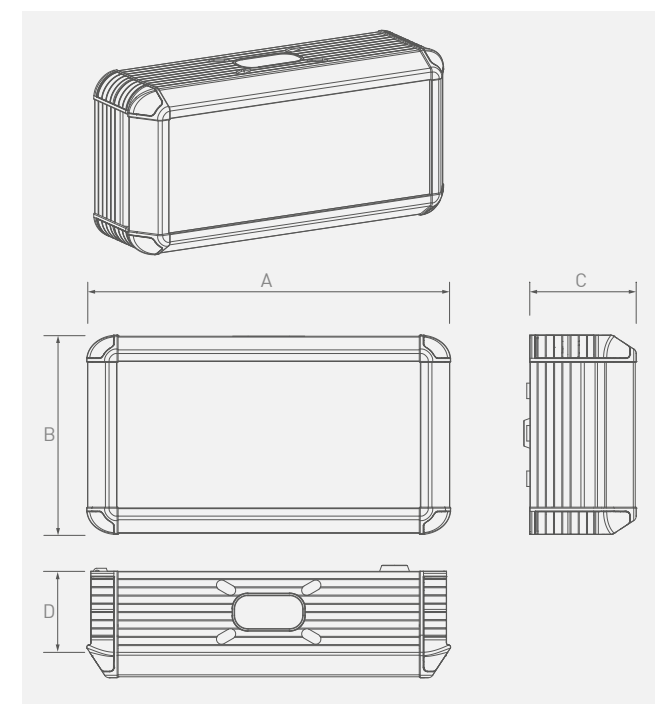



TEMPA PANO

Enclosures engineered...



*“your reliable
solution partner,”*

