

Characteristics

Material

Sheet Steel (EN 10130 DC01)

- Frame : 1.5 mm
- Panel : 1.5 mm
- Door : 2 mm
- Plinth : 2 mm

Galvanized Steel (EN 10346 DX51D+Z)

- Mounting plate : 2 mm

Surface Finishing

- RAL7035w powder coating

IP Rating

- IP55 (TS 3033, EN 60529)

Others

- Welded frame construction
- Foamed-in door/rear panel PU sealing gasket
- Swing-handle polyamide lock (4 points locking, 333 key)
- Concealed hinge
- Door and panel options for rear side
- Multiple mounting plate possibility
- The modular construction can be join
- Removable side panels
- Plinth and cover options



On Request

- Special sizes
- Special colour
- Pre-punching
- Flat pack options



Supply Includes

- Front and rear frame
- Door (Select = **K**)
- Rear panel (Select = **K**)
- Mounting plate (Option = **M**)
- Plinth (Option = **P**)
- Top cover
- 4/6 pcs side rails

Complementary Accessories

- Side panel
- Eye bolt
- Rain canopy
- Door inside mounting profile
- Cover plate and profiles
- Hinged cover plate
- Short mounting plate
- Partial mounting plate
- Infill mounting plate
- Carriage depth slide and support
- Partition profile
- L, U and Z profiles
- L and Z brackets
- Busbar & depth profile
- Ladder busbar profile
- Joining set
- Adjustable / pull out perforated shelf
- Plan pocket
- Plastic cover plate
- Earthing cable
- Door interlock system for joined enclosures

Width	Height	Depth	Reference	Door	Hinge	Glazed Door	
A	B	C					
mm	mm	mm		pcs	pcs	Y / N	
400	1800	400	BS xxx 041840	1	3	✓	
		500	BS xxx 041850	1	3	✓	
		600	BS xxx 041860	1	3	✓	
		800	BS xxx 041880	1	3	✓	
	2000	400	BS xxx 042040	1	3	✓	
		500	BS xxx 042050	1	3	✓	
		600	BS xxx 042060	1	3	✓	
		800	BS xxx 042080	1	3	✓	
600	1500	400	BS xxx 061540	1	3	✓	
		500	BS xxx 061550	1	3	✓	
		600	BS xxx 061560	1	3	✓	
	1800	400	BS xxx 061840	1	3	✓	
		500	BS xxx 061850	1	3	✓	
		600	BS xxx 061860	1	3	✓	
	2000	400	BS xxx 061880	1	3	✓	
		500	BS xxx 062040	1	3	✓	
		600	BS xxx 062050	1	3	✓	
	800	1500	400	BS xxx 081540	1	3	✓
			500	BS xxx 081550	1	3	✓
			600	BS xxx 081560	1	3	✓
1800		400	BS xxx 081840	1	3	✓	
		500	BS xxx 081850	1	3	✓	
		600	BS xxx 081860	1	3	✓	
2000		400	BS xxx 081880	1	3	✓	
		500	BS xxx 082040	1	3	✓	
		600	BS xxx 082050	1	3	✓	
2000		600	BS xxx 082060	1	3	✓	
		800	BS xxx 082080	1	3	✓	

Width	Height	Depth	Reference	Door	Hinge	Glazed Door
A	B	C				
mm	mm	mm		pcs	pcs	Y / N
1000	1800	400	BS xxx 101840	2	3+3	-
		500	BS xxx 101850	2	3+3	-
		600	BS xxx 101860	2	3+3	-
		800	BS xxx 101880	2	3+3	-
	2000	400	BS xxx 102040	2	3+3	-
		500	BS xxx 102050	2	3+3	-
		600	BS xxx 102060	2	3+3	-
		800	BS xxx 102080	2	3+3	-
1200	1800	400	BS xxx 121840	2	3+3	-
		500	BS xxx 121850	2	3+3	-
		600	BS xxx 121860	2	3+3	-
	2000	400	BS xxx 121880	2	3+3	-
		500	BS xxx 122040	2	3+3	-
		600	BS xxx 122050	2	3+3	-
	2000	600	BS xxx 122060	2	3+3	-
		800	BS xxx 122080	2	3+3	-



Product Group

Door / Rear Panel

- 1 - Solid door + Rear Panel
- 2 - Glazed door + Rear Panel
- 3 - Pre-punched D. + Rear Panel
- 4 - Solid door + Solid door
- 5 - Glazed door + Solid door
- 6 - Pre-punched D. + Solid door
- 7 - Glazed door + Glazed door
- 8 - Pre-punched D. + Glazed door
- 9 - Pre-punched D. + Pre-punched D.
- A - Solid door + Fixed Rear Panel
- B - Glazed door + Fixed Rear Panel
- C - Pre-punched D. + Fixed Rear Panel

Mounting Plate

- 0 - None
- 1 - Mounting plate
- 2 - Double mounting plate

Depth







Height

Width

Plinth

- 0 - None
- 1 - 100mm / Blank cover
- 2 - 100mm / Sliding cover
- 3 - 100mm / Brushed cover
- 4 - 200mm / Blank cover
- 5 - 200mm / Sliding cover
- 6 - 200mm / Brushed cover
- 7 - Bottom cover plate



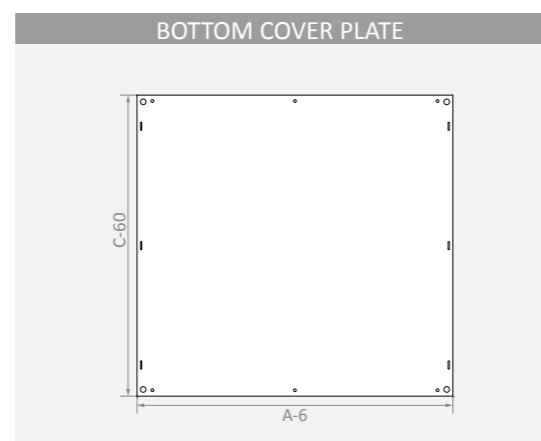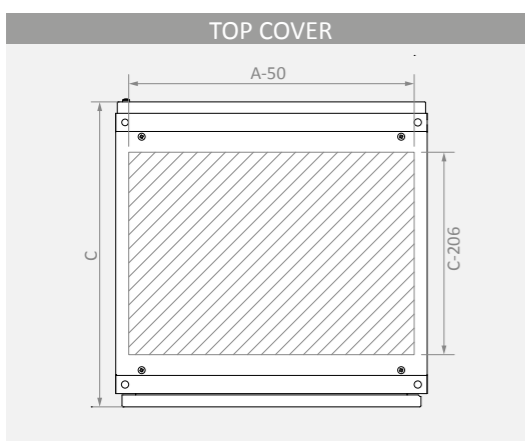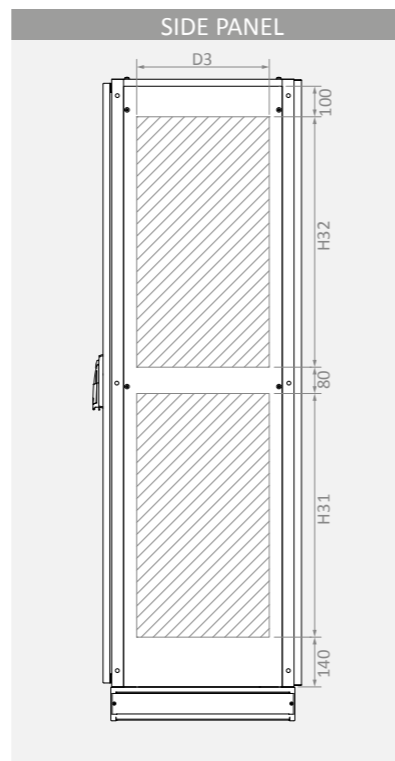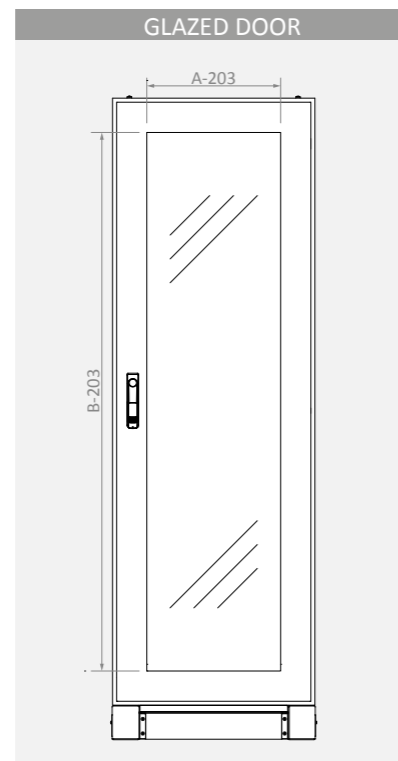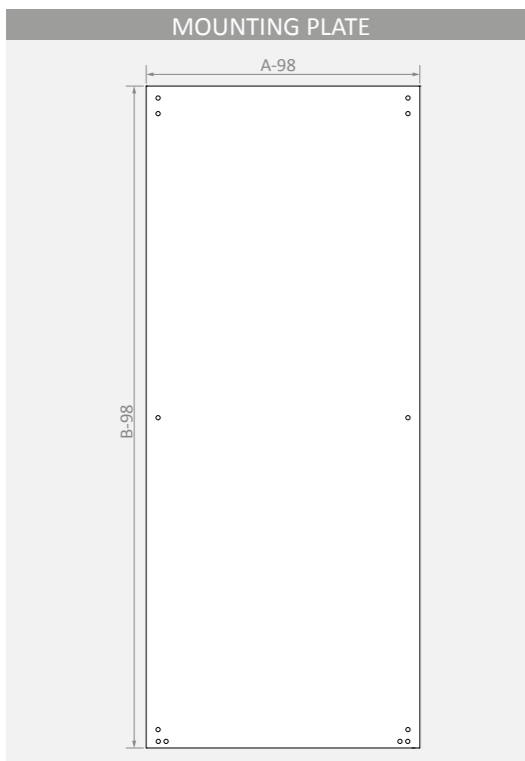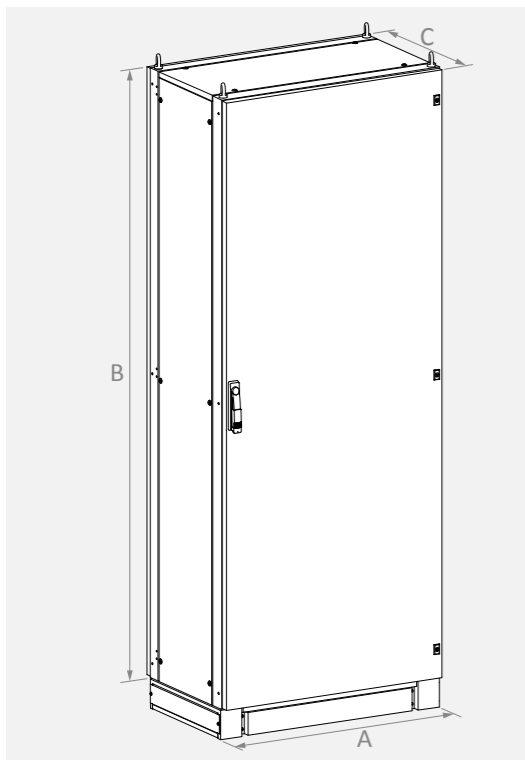

Width A mm	Height B mm	Reference	Solid Door	Useful Area		Glazed Door	Apparent Area		Mounting Plate	Dimensions	
				↔ mm	↕ mm		↔ mm	↕ mm		↔ mm	↕ mm
400	1800	BS xxx 0418**	BS KP0418	220	1620	BS KPX0418	197	1597	AS TS0418	302	1702
	2000	BS xxx 0420**	BS KP0420	220	1820	BS KPX0420	197	1797	AS TS0420	302	1902
600	1500	BS xxx 0615**	BS KP0615	420	1320	BS KPX0615	397	1297	AS TS0615	502	1402
	1800	BS xxx 0618**	BS KP0618	420	1620	BS KPX0618	397	1597	AS TS0618	502	1702
	2000	BS xxx 0620**	BS KP0620	420	1820	BS KPX0620	397	1797	AS TS0620	502	1902
800	1500	BS xxx 0815**	BS KP0815	620	1320	BS KPX0815	597	1297	AS TS0815	702	1402
	1800	BS xxx 0818**	BS KP0818	620	1620	BS KPX0818	597	1597	AS TS0818	702	1702
	2000	BS xxx 0820**	BS KP0820	620	1820	BS KPX0820	597	1797	AS TS0820	702	1902
1000	1800	BS xxx 1018**	BS KP1018	320 + 320	1620	---	---	---	AS TS1018	902	1702
	2000	BS xxx 1020**	BS KP1020	320 + 320	1820	---	---	---	AS TS1020	902	1902
1200	1800	BS xxx 1218**	BS KP1218	420 + 420	1620	---	---	---	AS TS1218	1102	1702
	2000	BS xxx 1220**	BS KP1220	420 + 420	1820	---	---	---	AS TS1220	1102	1902

Height B mm	Depth C mm	Reference	Side Panel	Useful Area		
				D3 mm	H31 mm	H32 mm
1500	400	BS xxx **1540	BS YS1540	195	580	580
	500	BS xxx **1550	BS YS1550	295	580	580
	600	BS xxx **1560	BS YS1560	395	580	580
1800	400	BS xxx **1840	BS YS1840	195	720	740
	500	BS xxx **1850	BS YS1850	295	720	740
	600	BS xxx **1860	BS YS1860	395	720	740
	800	BS xxx **1880	BS YS1880	595	720	740
2000	400	BS xxx **2040	BS YS2040	195	840	820
	500	BS xxx **2050	BS YS2050	295	840	820
	600	BS xxx **2060	BS YS2060	395	840	820
	800	BS xxx **2080	BS YS2080	595	840	820

Width A mm	Depth C mm	Reference	Top Cover	Useful Area		Bottom Cover Plate	Dimensions	
				↔ mm	↗ mm		↔ mm	↕ mm
400	400	BS xxx 04**40	BS TAV04040	350	194	AS BS0440	394	340
	500	BS xxx 04**50	BS TAV04050	350	294	AS BS0450	394	440
	600	BS xxx 04**60	BS TAV04060	350	394	AS BS0460	394	540
	800	BS xxx 04**80	BS TAV04080	350	594	AS BS0480	394	740
600	400	BS xxx 06**40	BS TAV06040	550	194	AS BS0640	594	340
	500	BS xxx 06**50	BS TAV06050	550	294	AS BS0650	594	440
	600	BS xxx 06**60	BS TAV06060	550	394	AS BS0660	594	540
	800	BS xxx 06**80	BS TAV06080	550	594	AS BS0680	594	740
800	400	BS xxx 08**40	BS TAV08040	750	194	AS BS0840	794	340
	500	BS xxx 08**50	BS TAV08050	750	294	AS BS0850	794	440
	600	BS xxx 08**60	BS TAV08060	750	394	AS BS0860	794	540
	800	BS xxx 08**80	BS TAV08080	750	594	AS BS0880	794	740
1000	400	BS xxx 10**40	BS TAV10040	950	194	AS BS1040	994	340
	500	BS xxx 10**50	BS TAV10050	950	294	AS BS1050	994	440
	600	BS xxx 10**60	BS TAV10060	950	394	AS BS1060	994	540
	800	BS xxx 10**80	BS TAV10080	950	594	AS BS1080	994	740
1200	400	BS xxx 12**40	BS TAV12040	1150	194	AS BS1240	1194	340
	500	BS xxx 12**50	BS TAV12050	1150	294	AS BS1250	1194	440
	600	BS xxx 12**60	BS TAV12060	1150	394	AS BS1260	1194	540
	800	BS xxx 12**80	BS TAV12080	1150	594	AS BS1280	1194	740

SOLID DOOR

Reference	Width		Wide	Length	Useful Area				Door	Lock Type	Hinge	Weight
	A	B			W1	W11*	W12*	H1				
	mm	mm	mm	mm	mm	mm	mm	mm	pcs	*	pcs	kg
BS KP 0418	400	1800	376	1776	220	-	-	1620	1	I	3	16.7
BS KP 0420	400	2000	376	1976	220	-	-	1820	1	I	3	18.4
BS KP 0615	600	1500	576	1476	420	-	-	1320	1	I	3	19.0
BS KP 0618	600	1800	576	1776	420	-	-	1620	1	I	3	22.8
BS KP 0620	600	2000	576	1976	420	-	-	1820	1	I	3	25.0
BS KP 0815	800	1500	776	1476	620	-	-	1320	1	I	3	24.1
BS KP 0818	800	1800	776	1776	620	-	-	1620	1	I	3	28.5
BS KP 0820	800	2000	776	1976	620	-	-	1820	1	I	3	31.4
BS KP 1018	1000	1800	976	1776	-	320	320	1620	2	I	3+3	37.0
BS KP 1020	1000	2000	976	1976	-	320	320	1820	2	I	3+3	40.0
BS KP 1218	1200	1800	1176	1776	-	420	420	1620	2	I	3+3	41.6
BS KP 1220	1200	2000	1176	1976	-	420	420	1820	2	I	3+3	46.2

Characteristics

Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes

Lock
Hinges
* I: Escutcheon Rod-latch

GLAZED DOOR



Reference	Width		Wide	Length	Apparent Area		Door	Lock Type	Hinge	Weight
	A	B			W6	H6				
	mm	mm	mm	mm	mm	mm	pcs	*	pcs	kg
BS KPX 0418	400	1800	376	1776	197	1597	1	I	3	13.0
BS KPX 0420	400	2000	376	1976	197	1797	1	I	3	14.3
BS KPX 0615	600	1500	576	1476	397	1297	1	I	3	14.3
BS KPX 0618	600	1800	576	1776	397	1597	1	I	3	17.0
BS KPX 0620	600	2000	576	1976	397	1797	1	I	3	18.5
BS KPX 0815	800	1500	776	1476	597	1297	1	I	3	17.7
BS KPX 0818	800	1800	776	1776	597	1597	1	I	3	20.8
BS KPX 0820	800	2000	776	1976	597	1797	1	I	3	23.0

Characteristics

Material	DIN EN 10130 DC01 CCRS / 4 mm tempered glass
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes

Lock
Hinges
* I: Escutcheon Rod-latch

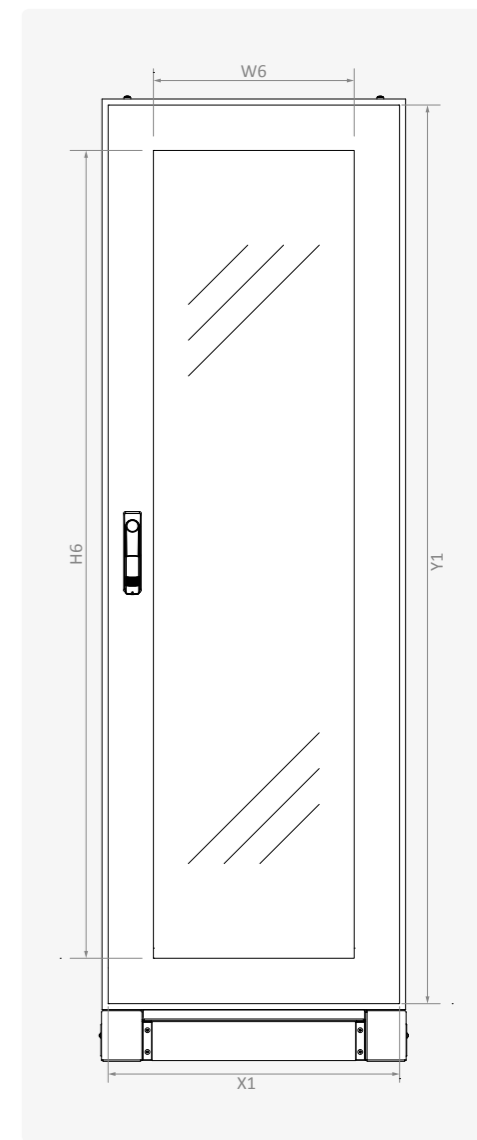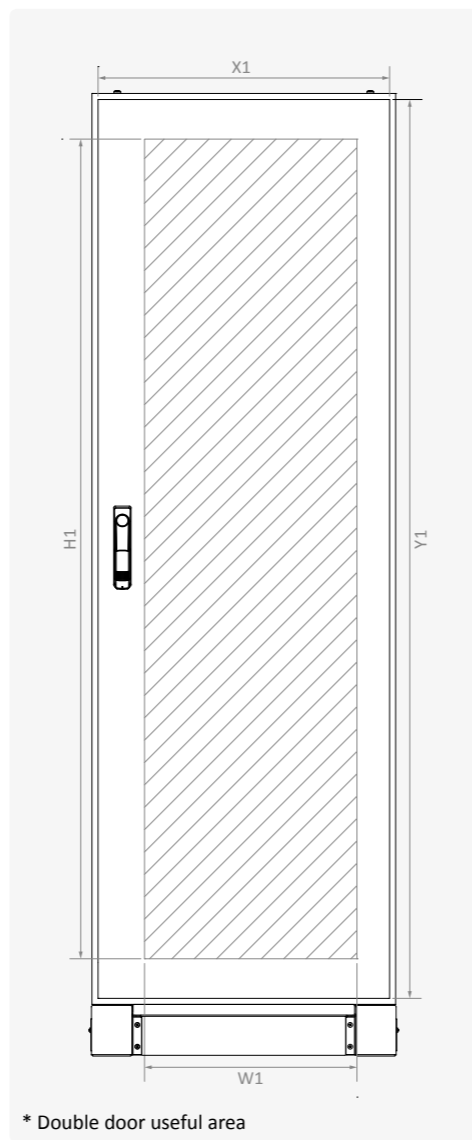

REAR PANEL



Reference	Width		Height		Wide		Length		Useful Area		Weight kg
	A mm	B mm	X1 mm	Y1 mm	W1 mm	H1 mm	W1 mm	H1 mm			
AS ST 0418	400	1800	394	1794	310	1710	310	1710	9.5		
AS ST 0420	400	2000	394	1994	310	1910	310	1910	10.6		
AS ST 0615	600	1500	594	1494	510	1410	510	1410	11.5		
AS ST 0618	600	1800	594	1794	510	1710	510	1710	13.8		
AS ST 0620	600	2000	594	1994	510	1910	510	1910	15.4		
AS ST 0815	800	1500	794	1494	710	1410	710	1410	15.4		
AS ST 0818	800	1800	794	1794	710	1710	710	1710	18.2		
AS ST 0820	800	2000	794	1994	710	1910	710	1910	20.3		
AS ST 1018	1000	1800	994	1794	910	1710	910	1710	22.6		
AS ST 1020	1000	2000	994	1994	910	1910	910	1910	24.9		
AS ST 1218	1200	1800	1194	1794	1110	1710	1110	1710	27.0		
AS ST 1220	1200	2000	1194	1994	1110	1910	1110	1910	30.0		

Characteristics

Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes

- Rear panel fasteners

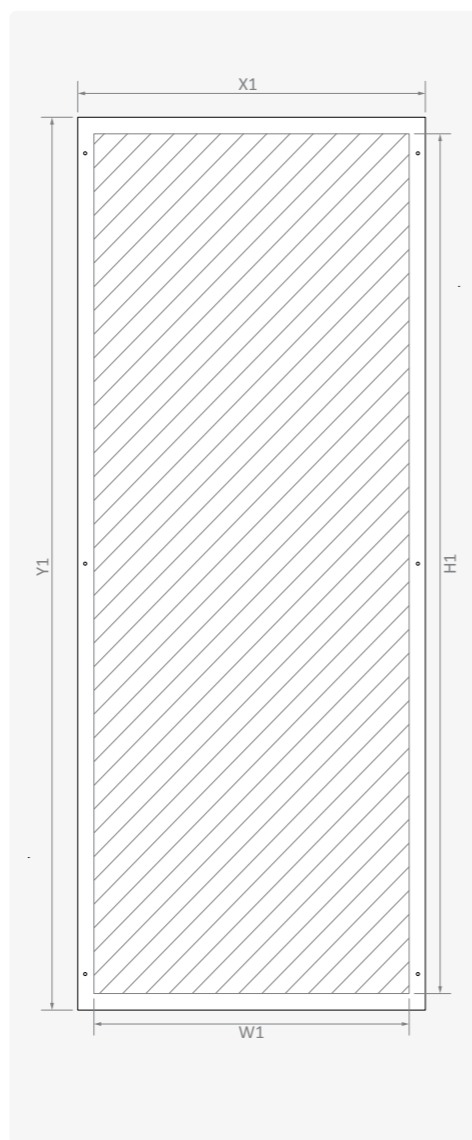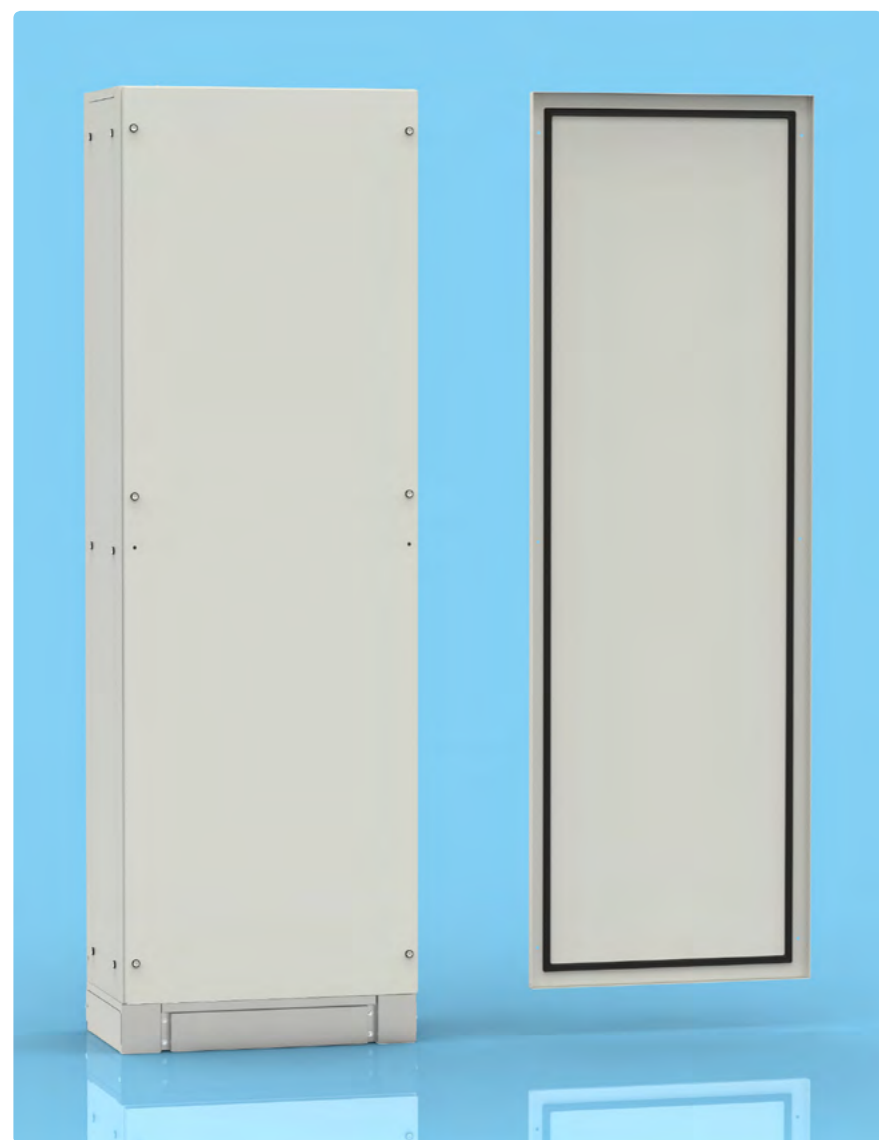

SIDE PANEL


Reference	Height		Depth		Wide		Length		Useful Area			Weight kg
	B mm	C mm	X1 mm	Y1 mm	D3 mm	H31 mm	H32 mm	D3 mm	H31 mm	H32 mm		
BS YS 1540	1500	400	240	1480	194	580	580	194	580	580	5.4	
BS YS 1550	1500	500	340	1480	294	580	580	294	580	580	7.3	
BS YS 1560	1500	600	440	1480	394	580	580	394	580	580	9.1	
BS YS 1840	1800	400	240	1780	194	720	740	194	720	740	6.5	
BS YS 1850	1800	500	340	1780	294	720	740	294	720	740	8.7	
BS YS 1860	1800	600	440	1780	394	720	740	394	720	740	10.8	
BS YS 1880	1800	800	640	1780	594	720	740	594	720	740	15.4	
BS YS 2040	2000	400	240	1980	194	840	820	194	840	820	7.5	
BS YS 2050	2000	500	340	1980	294	840	820	294	840	820	9.6	
BS YS 2060	2000	600	440	1980	394	840	820	394	840	820	12	
BS YS 2080	2000	800	640	1980	594	840	820	594	840	820	16.9	

Characteristics

Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes



- Side / Top panel mounting screw set

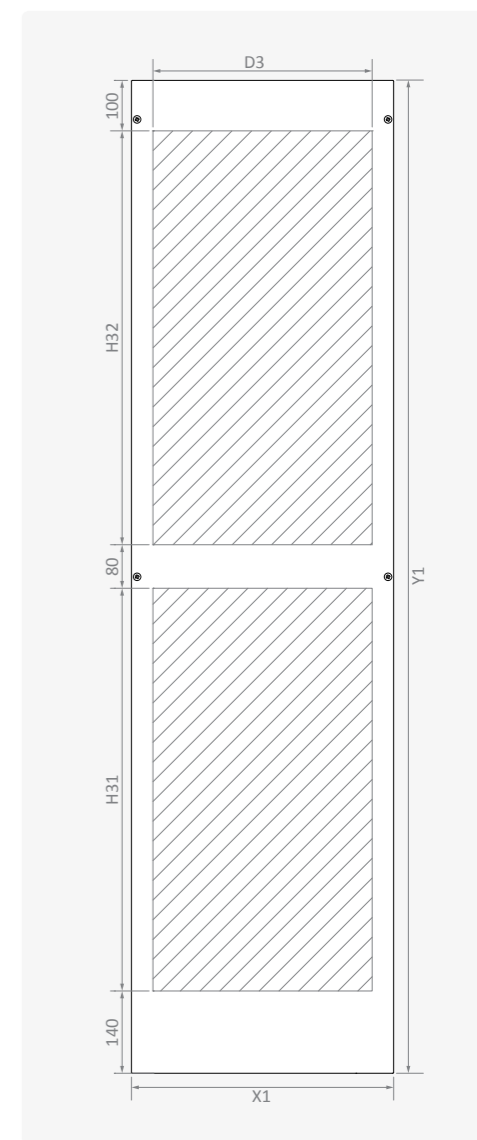

MOUNTING PLATE

Reference	Width		Wide	Length	Connection				Connection	Weight
	A	B			X2	Y2	X3	Y3		
	mm	mm	mm	mm	mm	mm	mm	mm	pcs	kg
AS TS 0418	400	1800	302	1702	241	1580	220	800	6	10.4
AS TS 0420	400	2000	302	1902	241	1780	220	900	6	11.6
AS TS 0615	600	1500	502	1402	441	1280	420	650	6	13.3
AS TS 0618	600	1800	502	1702	441	1580	420	800	6	16.0
AS TS 0620	600	2000	502	1902	441	1780	420	900	6	17.8
AS TS 0815	800	1500	702	1402	641	1280	620	650	6	17.9
AS TS 0818	800	1800	702	1702	641	1580	620	800	6	21.6
AS TS 0820	800	2000	702	1902	641	1780	620	900	6	24.2
AS TS 1018	1000	1800	902	1702	841	1580	820	800	6	27.2
AS TS 1020	1000	2000	902	1902	841	1780	820	900	6	30.3
AS TS 1218	1200	1800	1102	1702	1041	1580	1020	800	6	32.8
AS TS 1220	1200	2000	1102	1902	1041	1780	1020	900	6	36.6


Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm	Carriage slide support and fasteners	

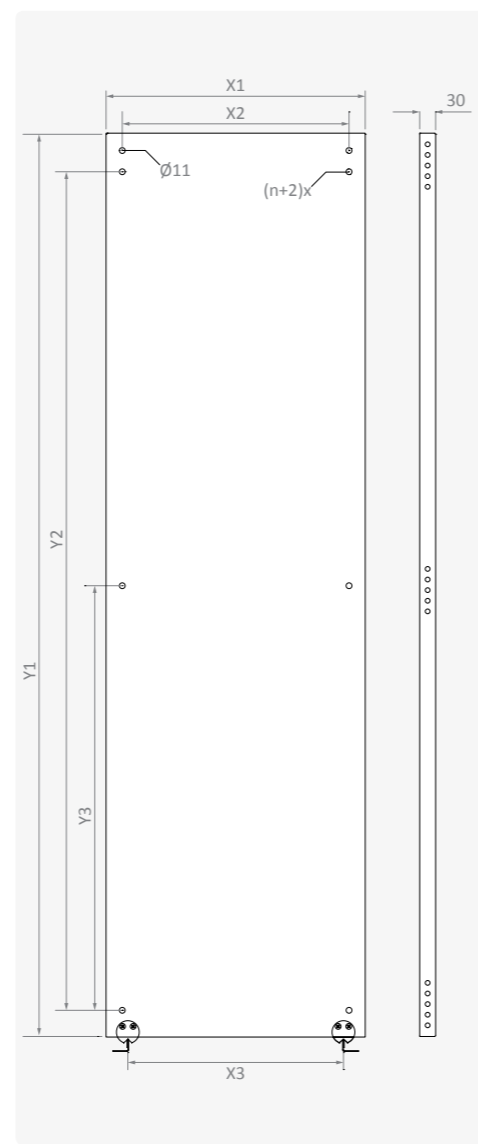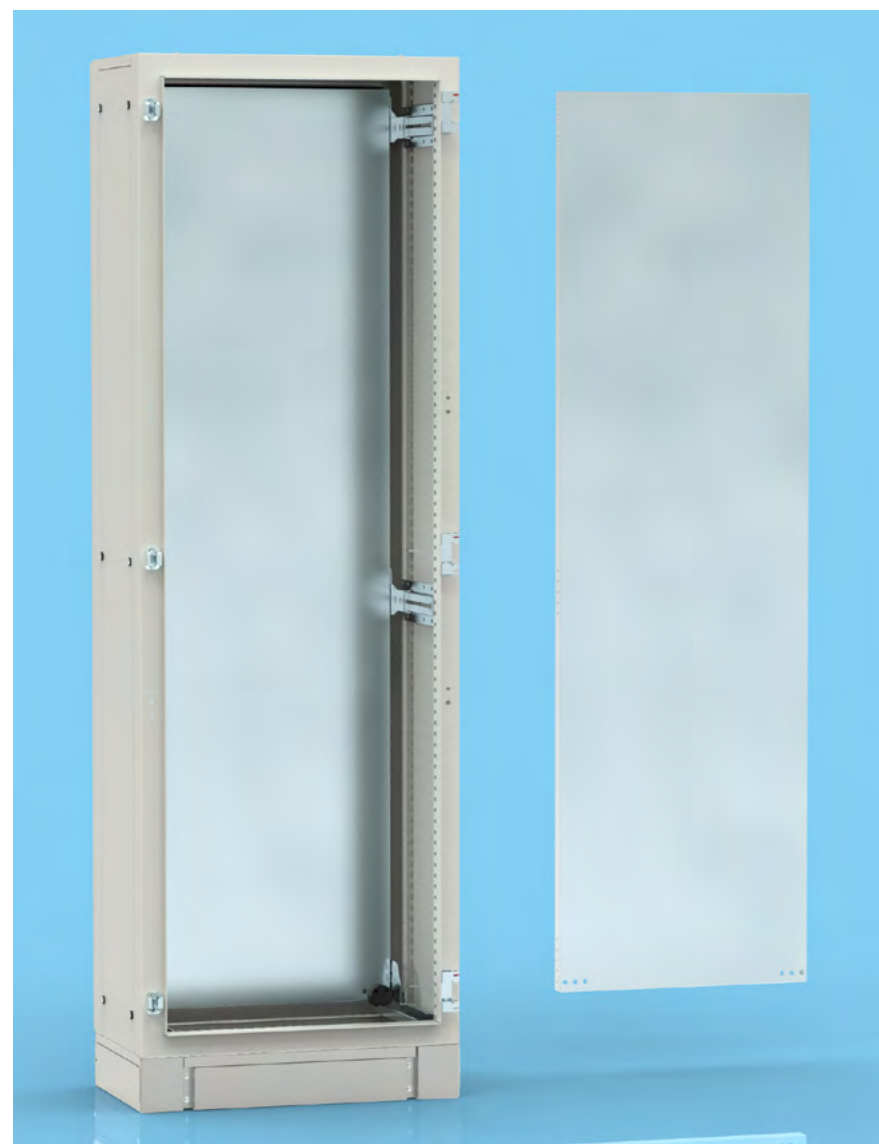

SHORT MOUNTING PLATE

Reference	Width		Wide	Length	Connection				Connection	Weight
	A	X1			Y1	X2	Y2	X3		
	mm	mm	mm	mm	mm	mm	mm	mm	pcs	kg
AS TS 0416	400	302	1502	241	1380	220	700	6	6	9.1
AS TS 0616	600	502	1502	541	1380	420	700	6	6	15.2
AS TS 0816	800	702	1502	641	1380	620	700	6	6	21.3
AS TS 1016	1000	902	1502	841	1380	820	700	6	6	28.3
AS TS 1216	1200	1102	1502	1041	1380	1020	700	6	6	33.4

Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm	Carriage slide support and fasteners	

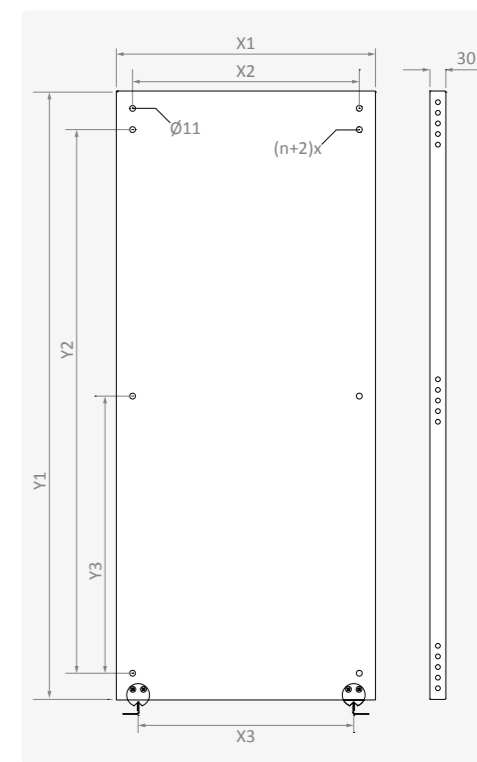

MOUNTING PLATE FIXING BRACKETS

Reference	Type	Connection	Weight	Characteristics	
			kg	Material	Thickness
AS FB 010 L	Side Connection	Left	0.1	DIN EN 10327 DX51D+Z galvanized	
AS FB 010 R	Side Connection	Right	0.1	2 mm	
AS FB 010 FD L	Front Connection	Left	0.2	Supply Includes	
AS FB 010 FD R	Front Connection	Right	0.2	Side rail mounting fasteners	
AS FB 010 F	Front Connection	Right/Left	0.2		
AS FB 010 FT R	Side Connection	Right	0.2		
AS FB 010 FT L	Side Connection	Left	0.2		
AS FB 010 FTR UK	Front Connection	Right	0.2		
AS FB 010 FTL UK	Front Connection	Left	0.2		




ASFB010R ASFB010FDR ASFB010F ASFB010FTL ASFB010FTRUK

PARTIAL MOUNTING PLATE

Reference	Width		Length			Connection		Weight kg
	A mm	X1 mm	Y1 mm	Y3 mm	X2 mm	Y2 mm		
AS TSK 0416	400	312	160	130	295	140	1.0	
AS TSK 0422	400	312	220	190	295	200	1.3	
AS TSK 0428	400	312	280	250	295	260	1.6	
AS TSK 0436	400	312	360	330	295	340	2.0	
AS TSK 0616	600	512	160	130	495	140	1.7	
AS TSK 0622	600	512	220	190	495	200	2.2	
AS TSK 0628	600	512	280	250	495	260	2.7	
AS TSK 0636	600	512	360	330	495	340	3.3	
AS TSK 0816	800	712	160	130	695	140	2.4	
AS TSK 0822	800	712	220	190	695	200	3.1	
AS TSK 0828	800	712	280	250	695	260	3.8	
AS TSK 0836	800	712	360	330	695	340	4.7	
AS TSK 1016	1000	912	160	130	895	140	3.1	
AS TSK 1022	1000	912	220	190	895	200	4.0	
AS TSK 1028	1000	912	280	250	895	260	4.8	
AS TSK 1036	1000	912	360	330	895	340	6.0	
AS TSK 1216	1200	1112	160	130	1095	140	3.8	
AS TSK 1222	1200	1112	220	190	1095	200	4.8	
AS TSK 1228	1200	1112	280	250	1095	260	5.9	
AS TSK 1236	1200	1112	360	330	1095	340	7.3	

Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm		

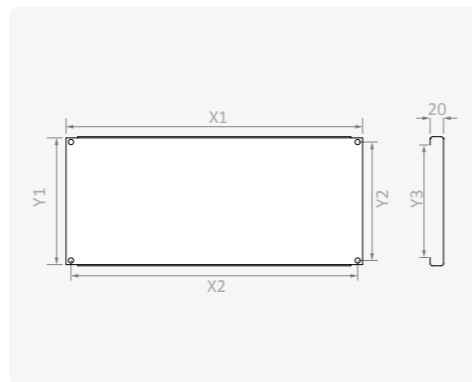


INFILL MOUNTING PLATE

Reference	Height	Length	Connection		Weight kg
	B mm	Y1 mm	Y2 mm	Y3 mm	
AS TSB 150	1500	1400	620	620	2.7
AS TSB 180	1800	1700	780	760	4.0
AS TSB 200	2000	1900	860	880	4.8

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting screws	

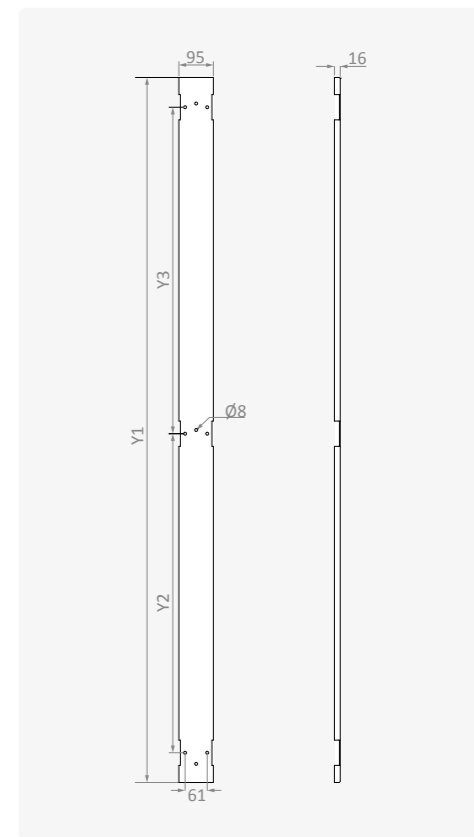

PARTIAL MOUNTING PLATE FIXING BRACKETS


Reference	Connection	Weight	Characteristics	
		kg	Material	DIN EN 10327 DX51D+Z galvanized
AS FB 020	Vertical	0.05	Thickness	2 mm
AS FB 030	Horizontal	0.05	Supply Includes	
			Side rail mounting fasteners	



AS FB 020




AS FB 030

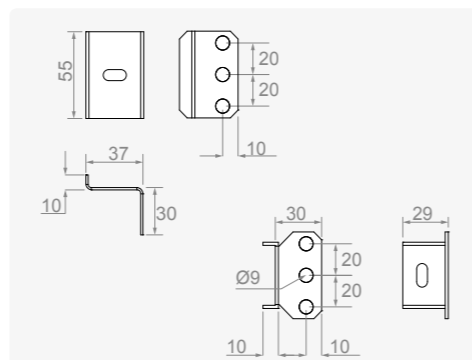

INFILL BRACKET

Reference	Weight	Characteristics		Supply Includes	
	kg	Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
AS FB 040	0.2	Thickness	2 mm	Standoff for infill mounting plate connection	

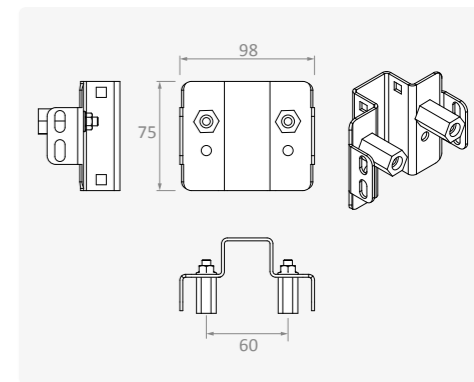


PLINTH

Reference	Width		Depth		Wide		Length		Height		Connection			Weight kg
	A mm	C mm	X1 mm	Z1 mm	Y1 mm	X2 mm	Z2 mm	Z21 mm	X2 mm	Z2 mm	Z21 mm			
AS Bx000404 1	400	400	400	345	100	325	200	100	325	200	100	5.7		
AS Bx000405 1	400	500	400	445	100	325	300	150	325	300	150	7.0		
AS Bx000406 1	400	600	400	545	100	325	400	200	325	400	200	8.4		
AS Bx000408 1	400	800	400	745	100	325	600	300	325	600	300	11.0		
AS Bx000604 1	600	400	600	345	100	525	200	100	525	200	100	8.1		
AS Bx000605 1	600	500	600	445	100	525	300	150	525	300	150	9.4		
AS Bx000606 1	600	600	600	545	100	525	400	200	525	400	200	10.8		
AS Bx000608 1	600	800	600	745	100	525	600	300	525	600	300	13.4		
AS Bx000804 1	800	400	800	345	100	725	200	100	725	200	100	10.5		
AS Bx000805 1	800	500	800	445	100	725	300	150	725	300	150	11.8		
AS Bx000806 1	800	600	800	545	100	725	400	200	725	400	200	13.1		
AS Bx000808 1	800	800	800	745	100	725	600	300	725	600	300	15.8		
AS Bx001004 1	1000	400	1000	345	100	925	200	100	925	200	100	12.9		
AS Bx001005 1	1000	500	1000	445	100	925	300	150	925	300	150	14.2		
AS Bx001006 1	1000	600	1000	545	100	925	400	200	925	400	200	15.5		
AS Bx001008 1	1000	800	1000	745	100	925	600	300	925	600	300	18.2		
AS Bx001204 1	1200	400	1200	345	100	1125	200	100	1125	200	100	15.3		
AS Bx001205 1	1200	500	1200	445	100	1125	300	150	1125	300	150	16.6		
AS Bx001206 1	1200	600	1200	545	100	1125	400	200	1125	400	200	17.9		
AS Bx001208 1	1200	800	1200	745	100	1125	600	300	1125	600	300	20.6		
AS Bx000404 2	400	400	400	345	200	325	200	100	325	200	100	7.4		
AS Bx000405 2	400	500	400	445	200	325	300	150	325	300	150	8.7		
AS Bx000406 2	400	600	400	545	200	325	400	200	325	400	200	10.1		
AS Bx000408 2	400	800	400	745	200	325	600	300	325	600	300	12.7		
AS Bx000604 2	600	400	600	345	200	525	200	100	525	200	100	9.8		
AS Bx000605 2	600	500	600	445	200	525	300	150	525	300	150	11.1		
AS Bx000606 2	600	600	600	545	200	525	400	200	525	400	200	12.5		
AS Bx000608 2	600	800	600	745	200	525	600	300	525	600	300	15.1		
AS Bx000804 2	800	400	800	345	200	725	200	100	725	200	100	12.2		
AS Bx000805 2	800	500	800	445	200	725	300	150	725	300	150	13.5		
AS Bx000806 2	800	600	800	545	200	725	400	200	725	400	200	14.8		
AS Bx000808 2	800	800	800	745	200	725	600	300	725	600	300	17.5		
AS Bx001004 2	1000	400	1000	345	200	925	200	100	925	200	100	14.6		
AS Bx001005 2	1000	500	1000	445	200	925	300	150	925	300	150	15.9		
AS Bx001006 2	1000	600	1000	545	200	925	400	200	925	400	200	17.2		
AS Bx001008 2	1000	800	1000	745	200	925	600	300	925	600	300	19.9		
AS Bx001204 2	1200	400	1200	345	200	1125	200	100	1125	200	100	17.0		
AS Bx001205 2	1200	500	1200	445	200	1125	300	150	1125	300	150	18.3		
AS Bx001206 2	1200	600	1200	545	200	1125	400	200	1125	400	200	19.6		
AS Bx001208 2	1200	800	1200	745	200	1125	600	300	1125	600	300	22.3		

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes	
Cover plates and mounting screws	
Plinth mounting fasteners	

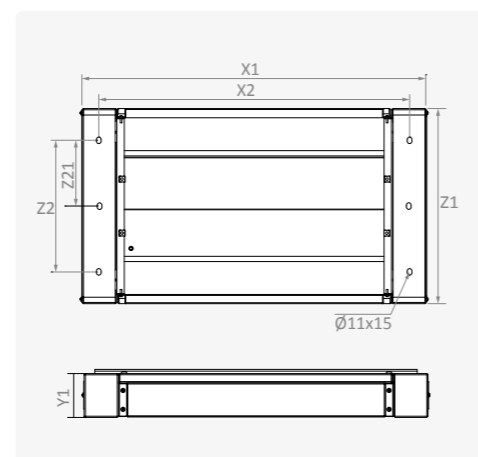


BOTTOM COVER PLATE

Reference	Width		Depth		Wide		Length		Weight kg
	A mm	C mm	X mm	Y mm	X mm	Y mm			
AS BS 0440	400	400	395	340	395	340	2.2		
AS BS 0450	400	500	395	440	395	440	2.8		
AS BS 0460	400	600	395	540	395	540	3.5		
AS BS 0480	400	800	395	740	395	740	4.7		
AS BS 0640	600	400	595	340	595	340	3.3		
AS BS 0650	600	500	595	440	595	440	4.3		
AS BS 0660	600	600	595	540	595	540	5.2		
AS BS 0680	600	800	595	740	595	740	7.1		
AS BS 0840	800	400	795	340	795	340	4.4		
AS BS 0850	800	500	795	440	795	440	5.7		
AS BS 0860	800	600	795	540	795	540	6.9		
AS BS 0880	800	800	795	740	795	740	9.4		
AS BS 1040	1000	400	995	340	995	340	5.5		
AS BS 1050	1000	500	995	440	995	440	7.1		
AS BS 1060	1000	600	995	540	995	540	8.6		
AS BS 1080	1000	800	995	740	995	740	11.8		
AS BS 1240	1200	400	1195	340	1195	340	6.6		
AS BS 1250	1200	500	1195	440	1195	440	8.5		
AS BS 1260	1200	600	1195	540	1195	540	10.4		
AS BS 1280	1200	800	1195	740	1195	740	14.2		

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes	
Bottom cover plates fasteners	

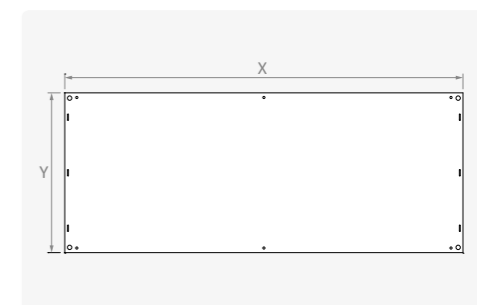


CARRIAGE DEPTH SLIDE

Reference	Depth		Length		Connection		Weight kg
	C mm	Z1 mm	Z2 mm	n pcs			
AS SRK 040	400	274	211	9	0.3		
AS SRK 050	500	374	311	14	0.5		
AS SRK 060	600	474	411	19	0.6		
AS SRK 080	800	674	611	29	0.9		

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

Supply Includes	
Mounting screws	

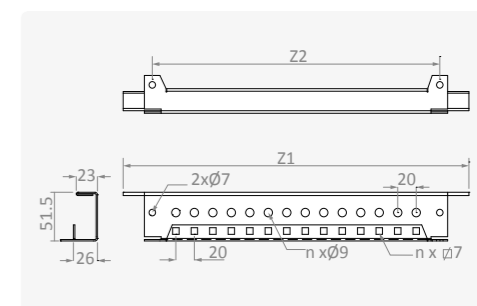




TOP COVER

Reference	Width		Depth		Useful Area		Weight kg
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
AS TAV 040 40	400	400	400	270	350	194	1.7
AS TAV 040 50	400	500	400	370	350	294	2.3
AS TAV 040 60	400	600	400	470	350	394	4.0
AS TAV 040 80	400	800	400	670	350	594	7.4
AS TAV 060 40	600	400	600	270	550	194	2.4
AS TAV 060 50	600	500	600	370	550	294	3.3
AS TAV 060 60	600	600	600	470	550	394	4.0
AS TAV 060 80	600	800	600	670	550	594	5.7
AS TAV 080 40	800	400	800	270	750	194	3.2
AS TAV 080 50	800	500	800	370	750	294	4.2
AS TAV 080 60	800	600	800	470	750	394	5.3
AS TAV 080 80	800	800	800	670	750	594	7.4
AS TAV 100 40	1000	400	1000	270	950	194	3.9
AS TAV 100 50	1000	500	1000	370	950	294	5.1
AS TAV 100 60	1000	600	1000	470	950	394	6.4
AS TAV 100 80	1000	800	1000	670	950	594	9.1
AS TAV 120 40	1200	400	1200	270	1150	194	4.6
AS TAV 120 50	1200	500	1200	370	1150	294	6.1
AS TAV 120 60	1200	600	1200	470	1150	394	7.6
AS TAV 120 80	1200	800	1200	670	1150	594	10.7

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Side / Top panel mounting screw set	

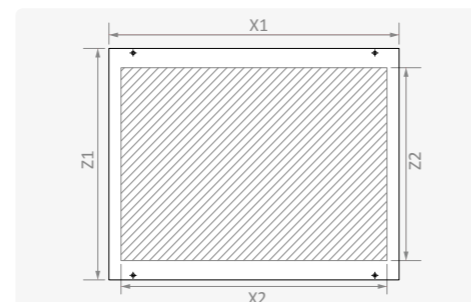


RAIN CANOPY

Reference	Width		Depth		Connection		Weight kg
	A mm	C mm	X1 mm	Z1 mm	X2 mm	Z2 mm	
AS SP 04 40	400	400	450	440	363	199	3.0
AS SP 04 50	400	500	450	540	363	299	3.9
AS SP 04 60	400	600	450	640	363	399	4.8
AS SP 04 80	400	800	450	840	363	599	6.5
AS SP 06 40	600	400	650	440	563	199	4.4
AS SP 06 50	600	500	650	540	563	299	5.3
AS SP 06 60	600	600	650	640	563	399	6.1
AS SP 06 80	600	800	650	840	563	599	7.9
AS SP 08 40	800	400	850	440	763	199	5.8
AS SP 08 50	800	500	850	540	763	299	6.7
AS SP 08 60	800	600	850	640	763	399	7.5
AS SP 08 80	800	800	850	840	763	599	9.3
AS SP 10 40	1000	400	1050	440	963	199	7.2
AS SP 10 50	1000	500	1050	540	963	299	8.0
AS SP 10 60	1000	600	1050	640	963	399	8.9
AS SP 10 80	1000	800	1050	840	963	599	10.6
AS SP 12 40	1200	400	1250	440	1163	199	8.5
AS SP 12 50	1200	500	1250	540	1163	299	9.4
AS SP 12 60	1200	600	1250	640	1163	399	10.3
AS SP 12 80	1200	800	1250	840	1163	599	12.0

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.2 mm

Supply Includes	
Mounting screws	

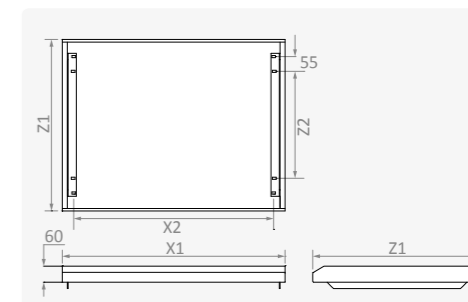


PULL OUT SHELVES

Reference	Width		Depth		Extension Z2 mm	Loading Capacity kg	Weight kg
	A mm	C mm	X1 mm	Z1 mm			
AS RPT 0640	600	400	490	235	200	30	2.0
AS RPT 0650	600	500	490	335	300	30	2.6
AS RPT 0660	600	600	490	435	400	30	3.2
AS RPT 0680	600	800	490	635	600	30	4.5
AS RPT 0840	800	400	690	235	200	30	2.6
AS RPT 0850	800	500	690	335	300	30	3.5
AS RPT 0860	800	600	690	435	400	30	4.4
AS RPT 0880	800	800	690	635	600	30	6.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Shelf	
Pull out side rails	
Connection profiles and mounting fasteners	

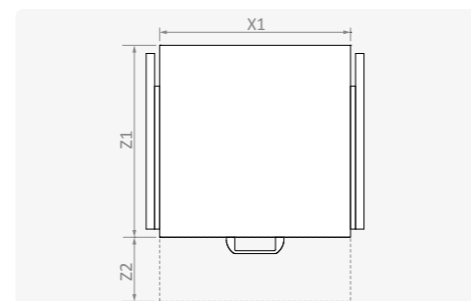


ADJUSTABLE SHELVES

Reference	Width		Depth		Length Z1 mm	Weight kg
	A mm	C mm	X1 mm	Z1 mm		
AS RPA 0640	600	400	560	270	270	2.4
AS RPA 0650	600	500	560	370	370	3.1
AS RPA 0660	600	600	560	470	470	3.8
AS RPA 0680	600	800	560	670	670	5.1
AS RPA 0840	800	400	760	270	270	3.1
AS RPA 0850	800	500	760	370	370	4.0
AS RPA 0860	800	600	760	470	470	4.9
AS RPA 0880	800	800	760	670	670	6.6

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Mounting fasteners	


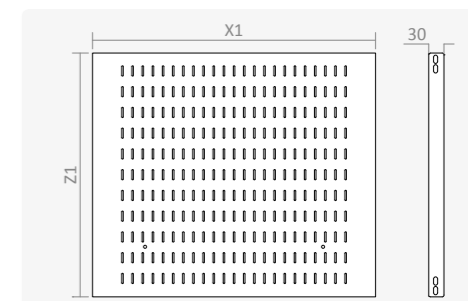


SIDE RAILS

Reference	Depth	Length	Connection		Weight kg
	C mm	Z1 mm	Z2 mm	Z3 mm	
AS SR 040	400	224	211	192	0.2
AS SR 050	500	324	311	292	0.3
AS SR 060	600	424	411	392	0.4
AS SR 080	800	624	611	592	0.6

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

Supply Includes	
Mounting screws	

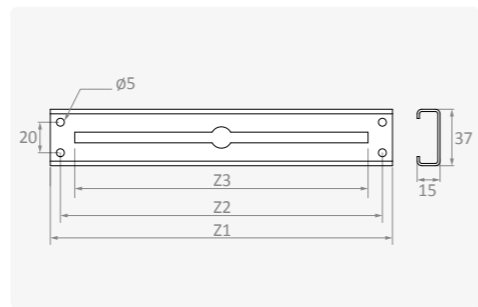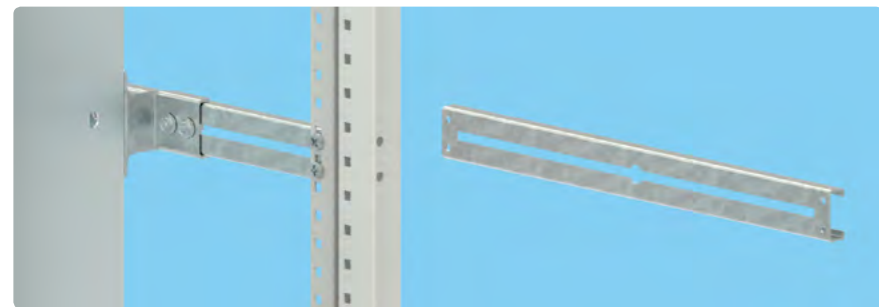


MOUNTING PLATE NH FUSE

Reference	Width	Length	Connection	Connection	Weight kg
	A mm	X1 mm	X2 mm	n pcs	
AS TSK 0406	400	312	295	5	0.5
AS TSK 0606	600	512	495	9	0.7
AS TSK 0806	800	712	695	13	1.0
AS TSK 1006	1000	912	895	17	1.3
AS TSK 1206	1200	1112	1095	21	1.5

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting screws	

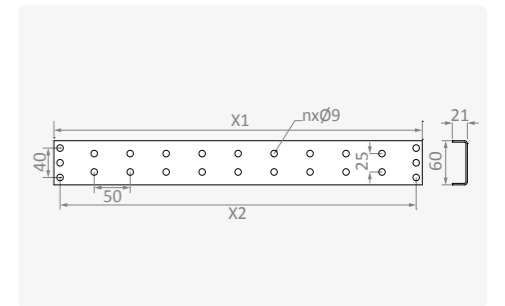


UNSLOTTED SIDE RAILS

Reference	Depth	Length	Connection	Weight kg
	C mm	Z1 mm	Z2 mm	
AS SK 040	400	226	211	0.3
AS SK 050	500	326	311	0.4
AS SK 060	600	426	411	0.5
AS SK 080	800	626	611	0.7

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

Supply Includes	
Mounting screws	


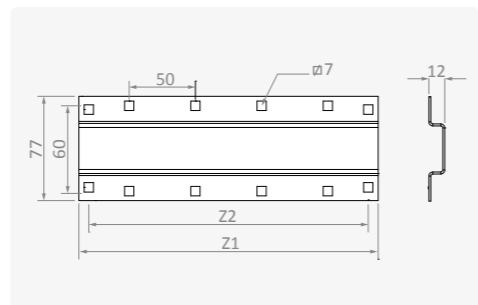


DEPTH MOUNTING PLATE

Reference	Depth	Length	Connection	Connection	Weight kg
	C mm	Z1 mm	Z2 mm	n pcs	
AS DP 040	400	228	211	9	0.3
AS DP 050	500	328	311	14	0.5
AS DP 060	600	428	411	19	0.6
AS DP 080	800	628	611	29	0.9

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting screws	

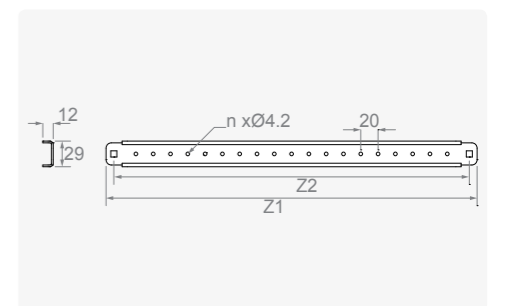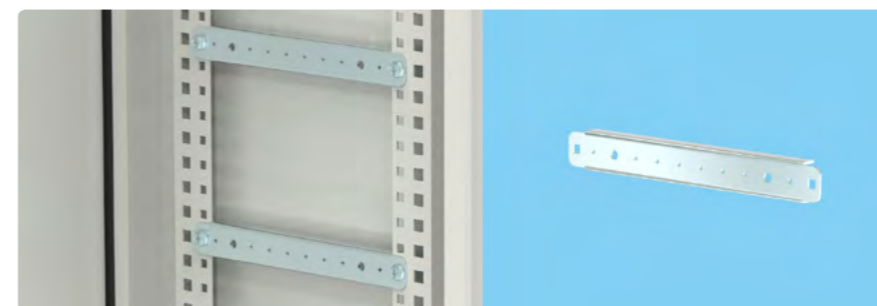


"U" PROFILE

Reference	Width	Length	Connection		Connection	Weight kg
	A mm	X1 mm	X2 mm	X3 mm	n pcs	
AS UP 060	600	540	495	80	6	0.9
AS UP 080	800	740	695	80	6	1.2
AS UP 100	1000	940	895	80	6	1.5
AS UP 120	1200	1140	1095	80	6	1.8

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting screws	

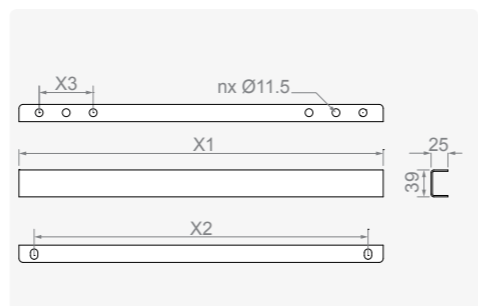


DOOR INSIDE MOUNTING PROFILE

Reference	Width	Length	Connection	Connection	Weight kg
	C mm	Z1 mm	Z2 mm	n pcs	
AS IKP 040	400	259	243	9	0.2
AS IKP 050	500	359	343	13	0.2
AS IKP 060	600	459	443	17	0.3
AS IKP 080	800	659	643	25	0.4

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Mounting screws	

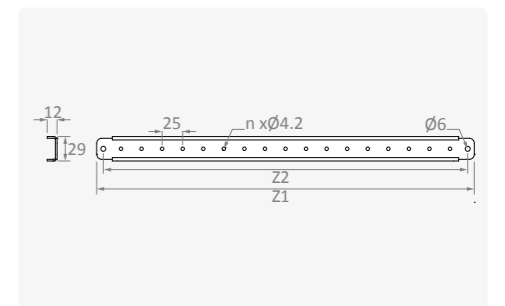


BUSBAR & DEPTH PROFILE

Reference	Depth		Length		Connection		Weight
	C	Z1	Z2	n	mm	pcs	
AS BP 040	400	270	211	8	mm		0.4
AS BP 050	500	370	311	12	mm		0.6
AS BP 060	600	470	411	16	mm		0.8
AS BP 080	800	670	611	24	mm		1.2

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Mounting screws

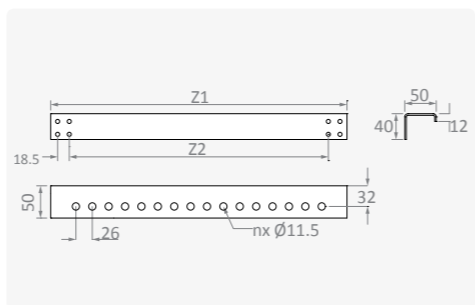

"L" BRACKETS

Reference	Length			Connection	Weight
	X1	Y1	Z1		
AS L 4230	42	55	30	Z2	0.1
AS R 4230	42	55	30	Z2	0.1
AS L 4250	42	55	50	Z2	0.1
AS R 4250	42	55	50	Z2	0.1
AS L 4290	42	55	90	Z2	0.1
AS R 4290	42	55	90	Z2	0.1

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm


Supply Includes  
 ■ Mounting screws



AS L 42 30 / AS R 42 30

AS L 42 50 / AS R 42 50

AS L 42 90 / AS R 42 90

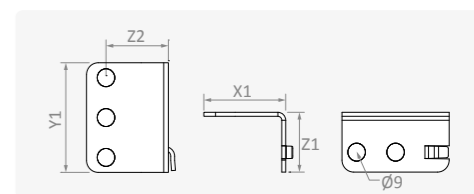


NOTCHED BUSBAR & DEPTH PROFILE

Reference	Width		Length		Connection		Weight
	A	Z1	Z11	Z2	n		
AS BPK 040	400	270	170	211	6	0.3	
AS BPK 050	500	370	270	311	10	0.5	
AS BPK 060	600	470	370	411	14	0.7	
AS BPK 080	800	670	570	611	22	1.1	

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Mounting screws


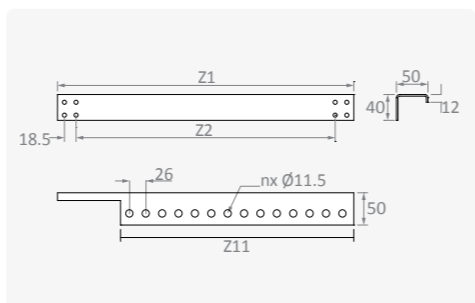


"Z" BRACKETS

Reference	Length			Connection	Weight
	X1	Y1	Z1		
AS FB 300L	30	55	58	Z2	0.1
AS FB 300R	30	55	58	Z2	0.1

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Mounting screws

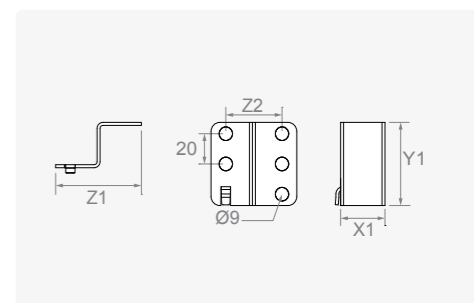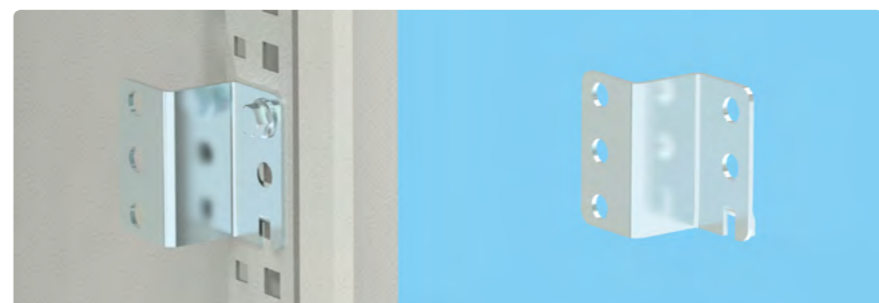


LADDER BUSBAR PROFILES

Reference	Depth		Length					Connection		Weight
	C	Z1	Z11	Z12	Z13	Z2	Z3	n		
AS LB 040	400	270	85	85	92	211	26	3	0.7	
AS LB 050	500	370	120	120	122	311	26	3	0.8	
AS LB 060	600	470	155	155	152	411	26	4	0.9	
AS LB 080	800	670	220	225	217	611	26	7	1.0	

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Mounting screws


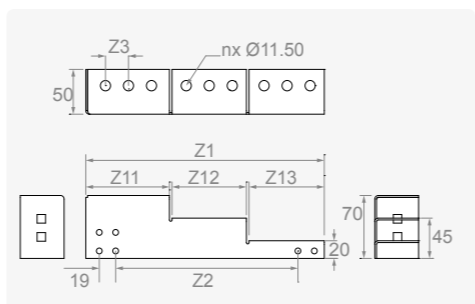


"Z" PROFILE

Reference	Width		Length		Connection		Weight
	A	X1	X2	n			
AS ZP 040	400	312	295	16	mm	0.1	
AS ZP 060	600	512	495	26	mm	0.1	
AS ZP 080	800	712	695	36	mm	0.1	
AS ZP 100	1000	912	895	46	mm	0.2	
AS ZP 120	1200	1112	1095	66	mm	0.2	

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm


Supply Includes  
 ■ Mounting screws

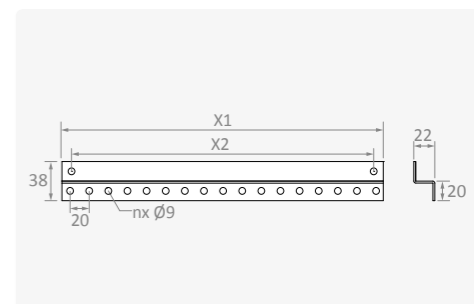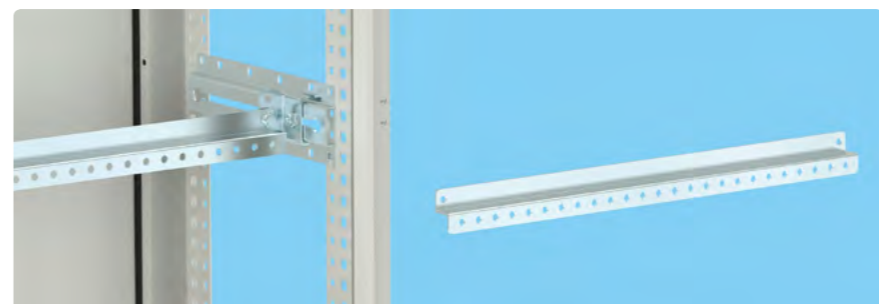

MOUNTING PROFILE INSIDE DOOR

Reference	Condition	Width	Height	Length	Weight
		A	B	Y1	kg
PNASKUY00400	Horizontal	400	-	220	0.1
PNASKUY00500	Horizontal	500	-	320	0.2
PNASKUY00600	Horizontal / Vertical	600	600	420	0.3
PNASKUY00800	Horizontal	800	-	620	0.4
PNASKUD00900	Vertical	-	900	720	0.5
PNASKUY001000	Horizontal	1000	-	820	0.6
PNASKUD01200	Vertical	-	1200	1020	0.7
PNASKUD01500	Vertical	-	1500	1320	0.9
PNASKUD01800	Vertical	-	1800	1620	1.1
PNASKUD02000	Vertical	-	2000	1820	1.2



Characteristics  
 ■ Material 20x20 square profile galvanized  
 ■ Thickness 1.2 mm

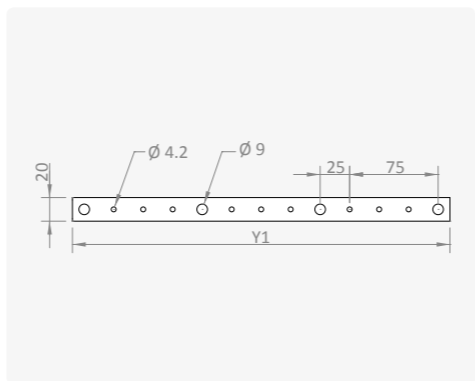

STANDOFF

Reference	External Dimensions	Width Across Flats	Connection	Packet	Weight
	H mm	L mm			
HD BM 00000196	25	13	Female / Male	M6 / M6	20
HD BM 00000200	50				
HD BM 00000240	75				
HD BM 00000210	125				
HD BM 00000220	50	17	M8 / M8	20	1.8
HD BM 00000230	125				

Characteristics  
 ■ Material Hexagonal free-cutting steel  
 ■ Surface Finishing Zinc coated; Cr<sup>3+</sup> passivation  
 ■ Connection male/female

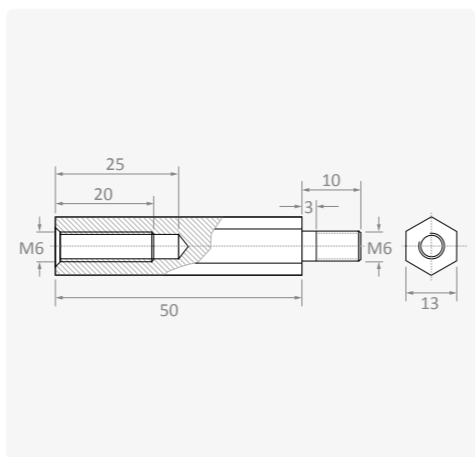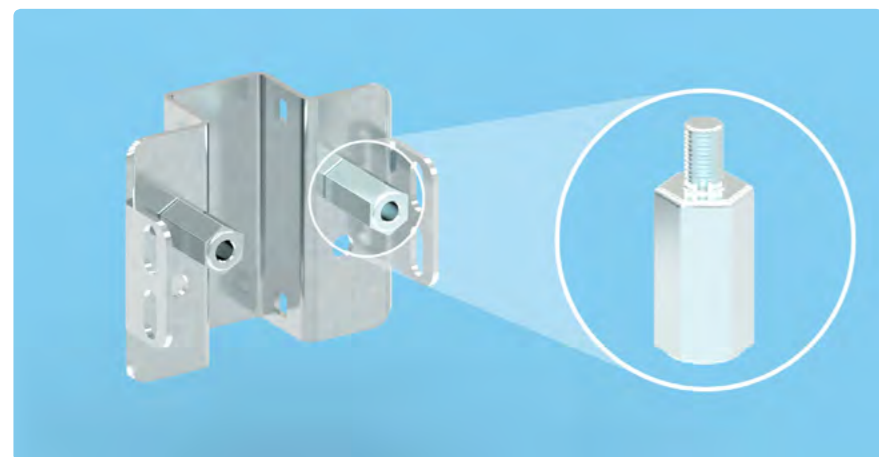


CONDANSER SHELF SYSTEM

Reference	Width	Depth	Weight
	A mm	C mm	
AS RS 06 40	600	400	2.1
AS RS 06 50	600	500	2.7
AS RS 06 60	600	600	3.2
AS RS 06 80	600	800	4.4
AS RS 08 40	800	400	2.9
AS RS 08 50	800	500	3.7
AS RS 08 60	800	600	4.6
AS RS 08 80	800	800	6.3

Characteristics  
 ■ Material DIN EN 10346 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Width profiles  
 ■ Depth profiles  
 ■ Mounting fasteners

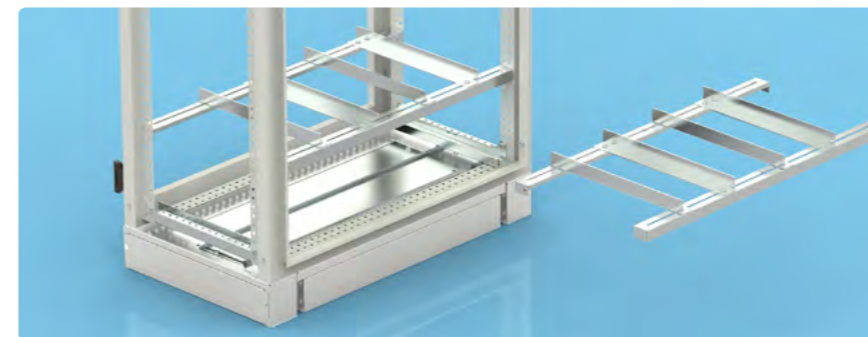


PLAN POCKETS

Reference	Width	Length			Weight
	A mm	X1 mm	Y1 mm	Z1 mm	
AS PJ 040	All Dimensions	A4	200	30	0.4
AS PJ 060	600/1200	A3	240	60	1.9
AS PJ 080	800	A3	240	60	2.6

Characteristics  
 ■ Material DIN EN 10130 DC01 CCRS  
 ■ Surface Finishing RAL7035w powder coating  
 ■ Thickness 1.5 mm

Supply Includes  
 ■ Mounting fasteners to fix door reinforcement frame

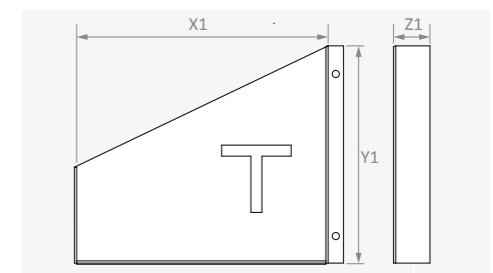


INCOMING CABLE ORGANIZERS

Reference	Width	Length	Connection	Connection	Weight
	A mm	X1 mm	X2 mm	n pcs	
AS KA 040	400	320	295	14	0.2
AS KA 060	600	520	495	24	0.2
AS KA 080	800	720	695	34	0.2
AS KA 100	1000	920	895	44	0.3
AS KA 120	1200	1120	1095	64	0.3

Characteristics  
 ■ Material DIN EN 10327 DX51D+Z galvanized  
 ■ Thickness 2 mm

Supply Includes  
 ■ Mounting screws

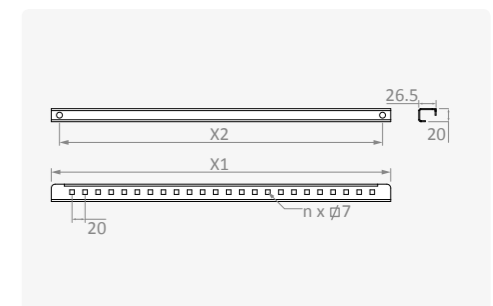


DEPTH PARTITION

Reference	Height		Length		C=800mm For Useful Area		C=1000mm For Useful Area		Weight kg
	B mm	Y1 mm	D33 mm	D34 mm	D33 mm	D34 mm	D33 mm	D34 mm	
AS DAP 060	600	540	193/293	293/193	293/393	393/293			1.1
AS DAP 080	800	740	193/293	293/193	293/393	393/293			1.6
AS DAP 100	1000	940	193/293	293/193	293/393	393/293			2.0
AS DAP 120	1200	1140	193/293	293/193	293/393	393/293			2.4
AS DAP 150	1500	1440	193/293	293/193	293/393	393/293			3.0
AS DAP 180	1800	1740	193/293	293/193	293/393	393/293			3.6
AS DAP 200	2000	1940	193/293	293/193	293/393	393/293			4.1

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes  
 ■ Mounting screws

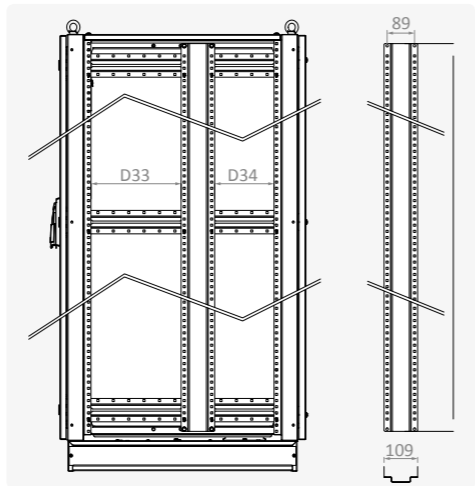


DEPTH SUPPORT PROFILE for DEPTH PARTITION

Reference	Depth	Length	Connection			Weight kg
	C mm	Z1 mm	Z2 mm	Z3 mm		
AS DDAP 080	800	628	611	219.5	0.98	
AS DDAP 100	1000	828	811	219.5	1.3	

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes  
 ■ Frame fasteners

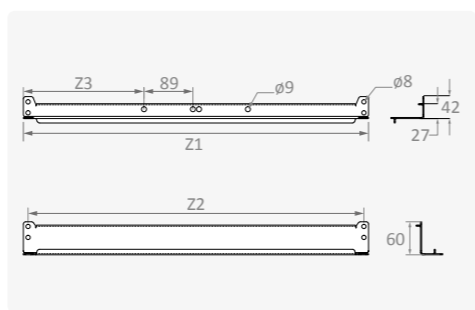


"L" PROFILE

Reference	Height	Length	Connection	Weight kg
	B mm	Y1 mm	n pcs	
AS FB 0150	1500	1340	53	1.1
AS FB 0180	1800	1640	65	1.3
AS FB 0200	2000	1840	73	1.5

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes  
 ■ Mounting fasteners

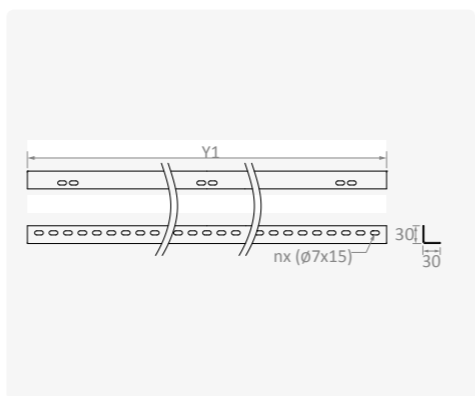


PARTITION PROFILE

Reference	Width / Height		Length	Weight kg
	A/B mm	Y1 mm	Y1 mm	
AS AP 060	600	554	554	0.7
AS AP 080	800	754	754	0.9
AS AP 100	1000	954	954	1.1
AS AP 120	1200	1154	1154	1.3
AS AP 150	1500	1454	1454	1.8
AS AP 180	1800	1754	1754	2.1
AS AP 200	2000	1954	1954	2.3


Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes  
 ■ Frame fasteners

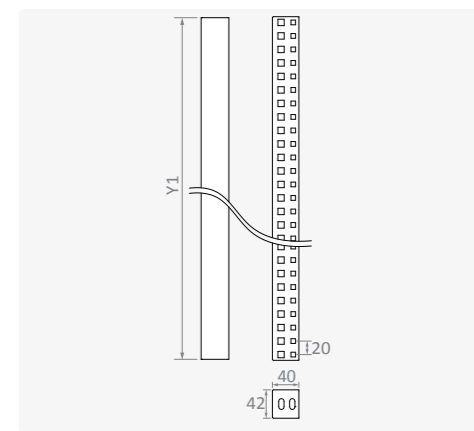

LAPTOP TRAY

Reference	Width	Weight kg	Characteristics		Supply Includes
	A mm		Material	DIN EN 10130 DC01 CCRS	
AS LT 010	600 / 1200	2.3	Surface Finishing	RAL7035w powder coating	■ Laptop tray ■ Mounting fasteners to fix to door reinforcement frame
AS LT 020	800	3.2	Thickness	2 mm	
AS LT 030	1000	2.1			

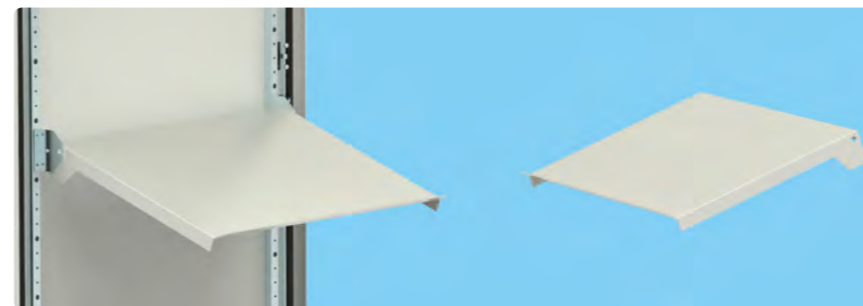

KEYBOARD FOLD-OUT TRAY (ON DOOR)

Reference	Width	Characteristics	
	A mm	Material	DIN EN 10130 DC01 CCRS
AS KR 060	600 / 800	Surface Finishing	RAL7035w powder coating
		Thickness	1.5 mm
		Supply Includes	
		■ Mounting fasteners	



SCREW TYPE COVER PLATES

Reference	Width		Length		Useful Area			Weight kg
	A mm	X1 mm	Y1 mm	X2 mm	X3 Module *	X4 mm		
AS PL 60 10	600	468	98	425	---	440	0.4	
AS PL 60 12	600	468	118	425	---	440	0.4	
AS PL 60 16	600	468	158	425	---	440	0.7	
AS PL 80 10	800	668	98	625	---	640	0.6	
AS PL 80 12	800	668	118	625	---	640	0.7	
AS PL 80 16	800	668	158	625	---	640	0.9	
AS PL 60 16W	600	468	158	---	22	440	0.5	
AS PL 80 16W	800	668	158	---	33	640	0.7	


**Characteristics**

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 1.0 mm

**Supply Includes**

- Cover plate profile mounting screws and plastic nuts
- Handles

\* 1 Module: 18mm

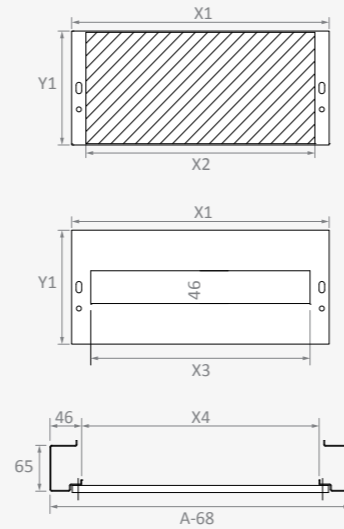

SCREW TYPE COVER PLATE PROFILE



Reference	Height	Length	Weight kg
	B mm	L mm	
AS PRD 060	600	550	0.5
AS PRD 090	900	850	0.9
AS PRD 120	1200	1150	1.4
AS PRD 150	1500	1450	1.8
AS PRD 180	1800	1750	2.2
AS PRD 200	2000	1950	2.5

**Characteristics**

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 1.5 mm

**Supply Includes**

- Mounting fasteners

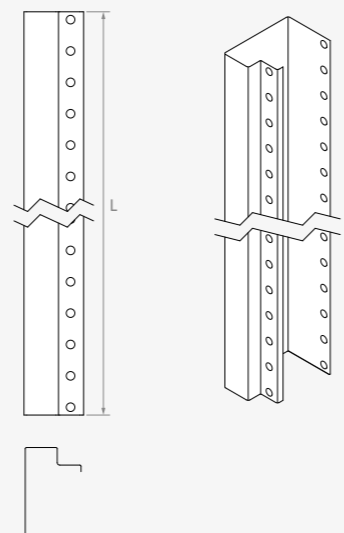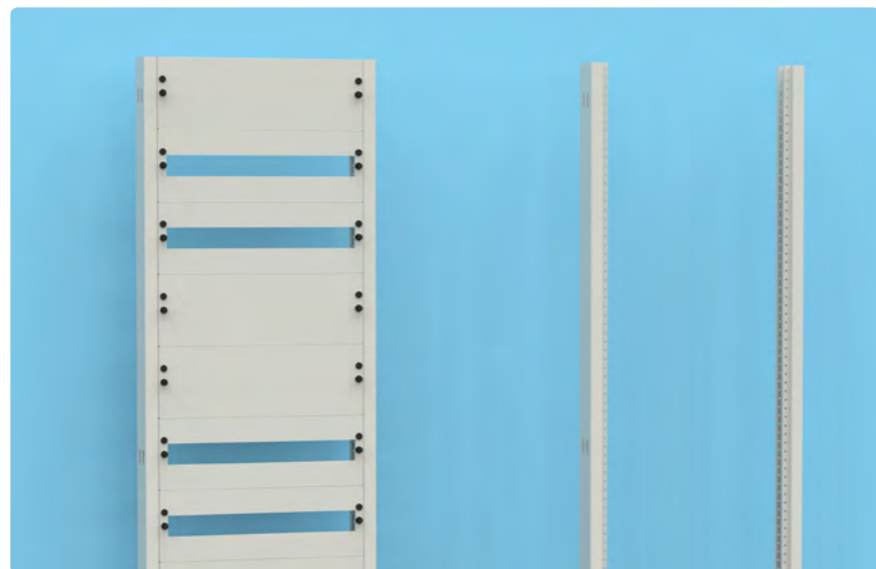

HINGED TYPE COVER PLATES

Reference	Width		Length		Useful Area			Weight kg
	A mm	Type	X1 mm	Y1 mm	X2 mm	X3 Module *	X4 mm	
AS PS 40 02	400	Type1	280	25	205	---	250	0.1
AS PS 40 10	400	Type2	280	100	205	---	250	0.4
AS PS 40 15	400	Type2	280	150	205	---	250	0.7
AS PS 40 20	400	Type2	280	200	205	---	250	1.0
AS PS 40 30	400	Type2	280	300	205	---	250	1.6
AS PS 40 40	400	Type3	280	400	205	---	250	2.2
AS PS 40 50	400	Type3	280	500	205	---	250	2.8
AS PS 60 02	600	Type1	480	25	405	---	450	0.2
AS PS 60 10	600	Type2	480	100	405	---	450	0.7
AS PS 60 15	600	Type2	480	150	405	---	450	1.0
AS PS 60 20	600	Type2	480	200	405	---	450	1.3
AS PS 60 30	600	Type2	480	300	405	---	450	1.9
AS PS 60 40	600	Type3	480	400	405	---	450	2.5
AS PS 60 50	600	Type3	480	500	405	---	450	3.1
AS PS 61 20	600	Full-Hight	480	1100	405	---	450	7.5
AS PS 61 50	600	Full-Hight	480	1400	405	---	450	9.4
AS PS 61 80	600	Full-Hight	480	1700	405	---	450	11.3
AS PS 62 00	600	Full-Hight	480	1900	405	---	450	12.6
AS PS 80 02	800	Type1	680	25	605	---	650	0.3
AS PS 80 10	800	Type2	680	100	605	---	650	1.0
AS PS 80 15	800	Type2	680	150	605	---	650	1.3
AS PS 80 20	800	Type2	680	200	605	---	650	1.6
AS PS 80 30	800	Type2	680	300	605	---	650	2.3
AS PS 80 40	800	Type3	680	400	605	---	650	2.9
AS PS 80 50	800	Type3	680	500	605	---	650	3.5
AS PS 81 20	800	Full-Hight	680	1100	605	---	650	8.6
AS PS 81 50	800	Full-Hight	680	1400	605	---	650	10.9
AS PS 81 80	800	Full-Hight	680	1700	605	---	650	13.2
AS PS 82 00	800	Full-Hight	680	1900	605	---	650	14.8
AS PS 40 15W	400	Type4	280	150	---	11	250	0.6
AS PS 60 15W	600	Type4	480	150	---	22	450	0.9
AS PS 80 15W	800	Type4	680	150	---	33	650	1.2


**Characteristics**

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 1.2 mm

**İçerik**

- Cover plate
- Lock (for hinge type)
- Hinge (for hinge type)



\* 1 Module: 18mm

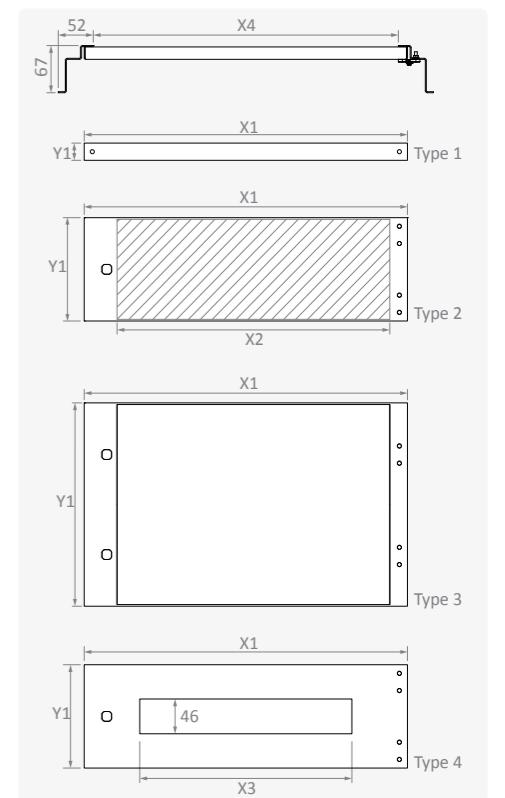

HINGED TYPE COVER PLATES PROFILE

Reference	Height	Length	Weight kg/packet
	B mm	L mm	
AS PP 060	600	550	1.5
AS PP 090	900	850	2.3
AS PP 120	1200	1150	3.1
AS PP 150	1500	1450	3.9
AS PP 180	1800	1750	4.6
AS PP 200	2000	1950	5.2



Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm
Supply Includes	
Mounting fasteners	

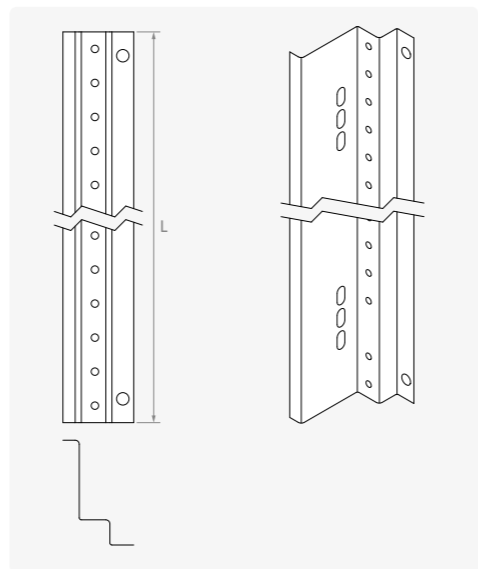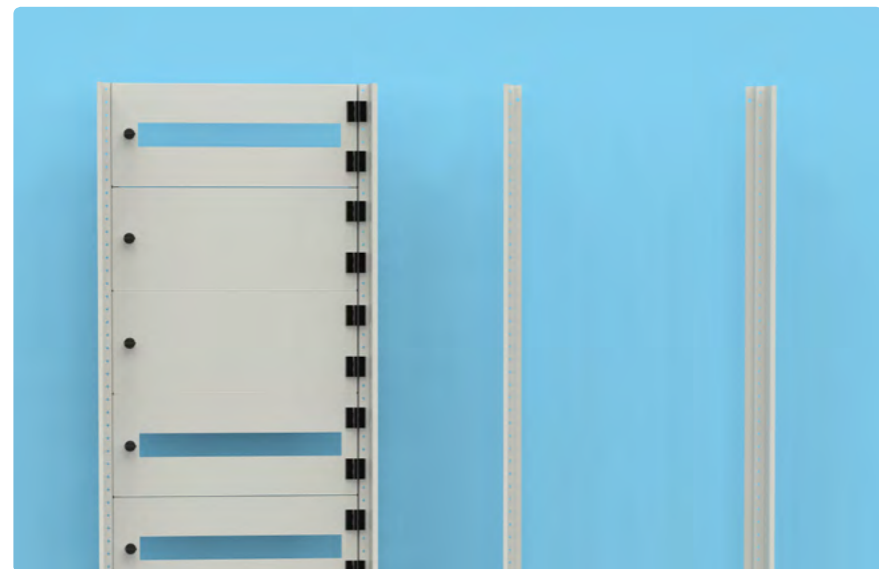

JOINING & LIFTING SET


Reference	Depth	Length	Connection	Weight kg/set
	C mm	Z1 mm	Z2 mm	
AS TP 040	400	340	287	1.4
AS TP 050	500	440	387	1.7
AS TP 060	600	540	487	2.1
AS TP 080	800	740	687	2.7

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	3 mm
Supply Includes	
2 pcs lifting and joining profiles and fasteners	
10 m 10x3 mm EPDM gasket	
Frame fasteners	

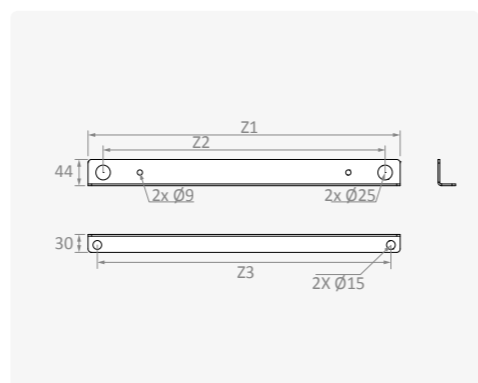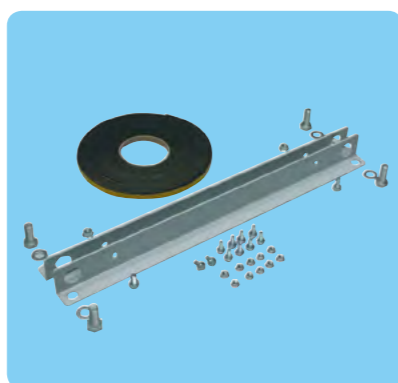

JOINING SET


Reference	Connection	Diameter	Weight
			kg/set
AS BK 020	M12	Ø 25	1.0
Characteristics		Supply Includes	
Material	DIN EN 10025 S235 JR	2 pcs lifting and joining profiles and fasteners	
Surface Finishing	Zinc coated Cr+3 passivation	10 m 10x3 mm EPDM gasket	
Thickness	5 mm	Frame fasteners	

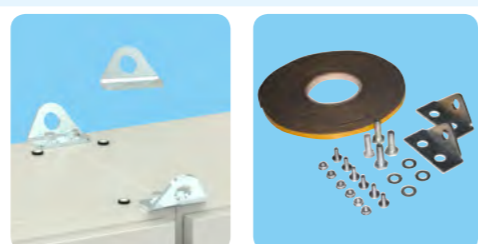

DIN RAILS

Reference	Width	Height	Hole	Length	Weight kg/pcs
	mm	mm	Yes/No	m	
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	Zinc coated Cr <sup>3</sup> passivation
Standards	DIN EN 60715

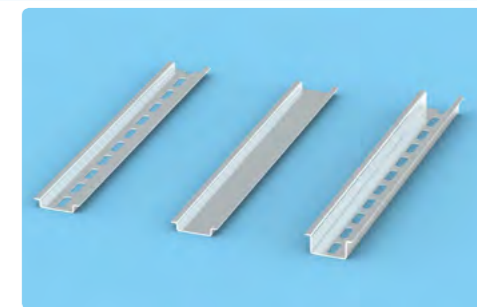


SLIDE SUPPORT

Reference	Weight	Characteristics	
	kg	Material	% 30 Fibre glass reinforced nylon 6
HD PA00000040	0.04	Supply Includes	Slide support
			M6x... Screws



EYE BOLT

Reference	Connection	Int. Diameter	Packet	Weight kg/packet
			pcs/packet	
AS AH 020	M12	Ø 30	4	1.0
Characteristics				
Material	C15E Forged steel			
Surface Finishing	Zinc coated Cr <sup>3</sup> passivation			
Standards	DIN 580			

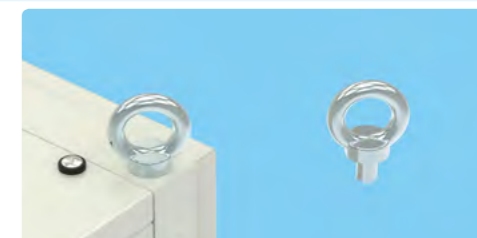


LOCKS & HINGES

Reference	Açıklama
KIEMANKQ0PS2M0	AS Lock
MNTP02000100	BS Hinge
KIMS1661221	Cover plate lock
MNMS299121	Cover plate hinge



EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm <sup>2</sup>				
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2

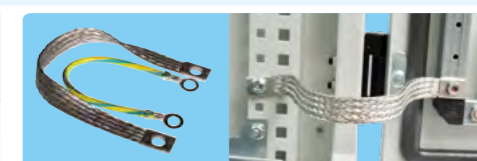

Characteristics

Material

- Sheet Steel (EN 10130 DC01)
- Frame : 1.5 mm
- Panel : 1.5 mm
- Door : 2 mm
- Plinth : 2 mm
- Galvanized Steel (EN 10346 DX51D+Z)
- Mounting plate : 2 mm

Surface Finishing

- RAL7035w powder coating

IP Rating

- IP55 (TS 3033, EN 60529)


Others

- Foamed-in door/rear panel PU sealing gasket
- Swing-handle polyamide lock (3 points locking, 333 key)
- Concealed hinge
- Door and panel options for rear side
- Multiple mounting plate possibility
- Plinth and cover options



On Request

- Special sizes
- Special colour
- Pre-punching

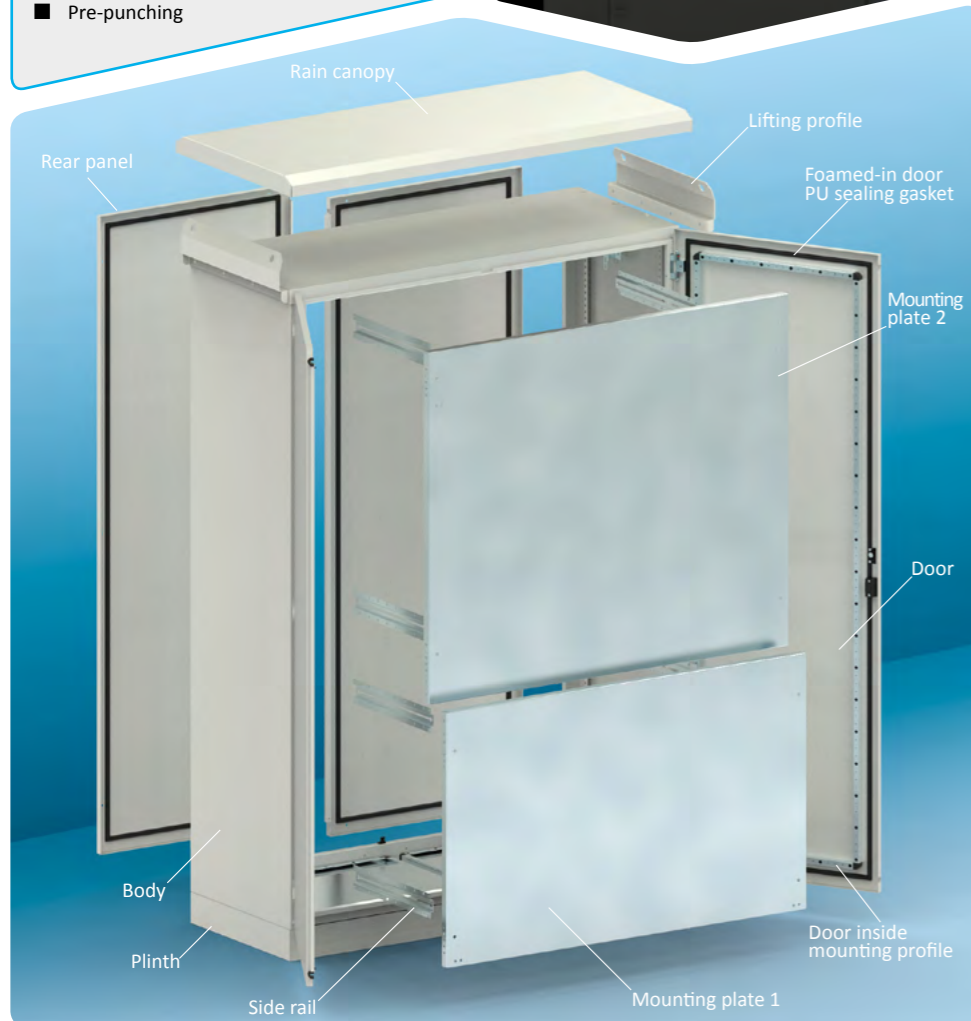



Supply Includes

- Body
- Door (Select = **K**)
- Rear panel (Select = **K**)
- Mounting plate (Option = **M**)
- Plinth (Option = **P**)
- 8 pcs side rails
- Lifting profile

Complementary Accessories




- Rain canopy
- Door inside mounting profile
- Partial mounting plate
- Carriage depth slide and support
- L, U and Z profiles
- L and Z brackets
- Busbar & depth profile
- Ladder busbar profile
- Plan pocket
- Earthing cable

Width A	Height B	Depth C	Reference	Door pcs	Hinge pcs	External width W1 mm	Useful Area			
							Door		Rear Panel	
mm	mm	mm					↔ mm	↕ mm	↔ mm	↕ mm
1400	1800	400	GS xxx 141840	2	3+3	1475	520 + 520	1620	600 + 600	1700
		500	GS xxx 141850	2	3+3	1475	520 + 520	1620	600 + 600	1700
		600	GS xxx 141860	2	3+3	1475	520 + 520	1620	600 + 600	1700
		800	GS xxx 141880	2	3+3	1475	520 + 520	1620	600 + 600	1700
	2000	400	GS xxx 142040	2	3+3	1475	520 + 520	1820	600 + 600	1900
		500	GS xxx 142050	2	3+3	1475	520 + 520	1820	600 + 600	1900
		600	GS xxx 142060	2	3+3	1475	520 + 520	1820	600 + 600	1900
		800	GS xxx 142080	2	3+3	1475	520 + 520	1820	600 + 600	1900
1600	1800	400	GS xxx 161840	2	3+3	1675	620 + 620	1620	700 + 700	1700
		500	GS xxx 161850	2	3+3	1675	620 + 620	1620	700 + 700	1700
		600	GS xxx 161860	2	3+3	1675	620 + 620	1620	700 + 700	1700
		800	GS xxx 161880	2	3+3	1675	620 + 620	1620	700 + 700	1700
	2000	400	GS xxx 162040	2	3+3	1675	620 + 620	1820	700 + 700	1900
		500	GS xxx 162050	2	3+3	1675	620 + 620	1820	700 + 700	1900
		600	GS xxx 162060	2	3+3	1675	620 + 620	1820	700 + 700	1900
		800	GS xxx 162080	2	3+3	1675	620 + 620	1820	700 + 700	1900

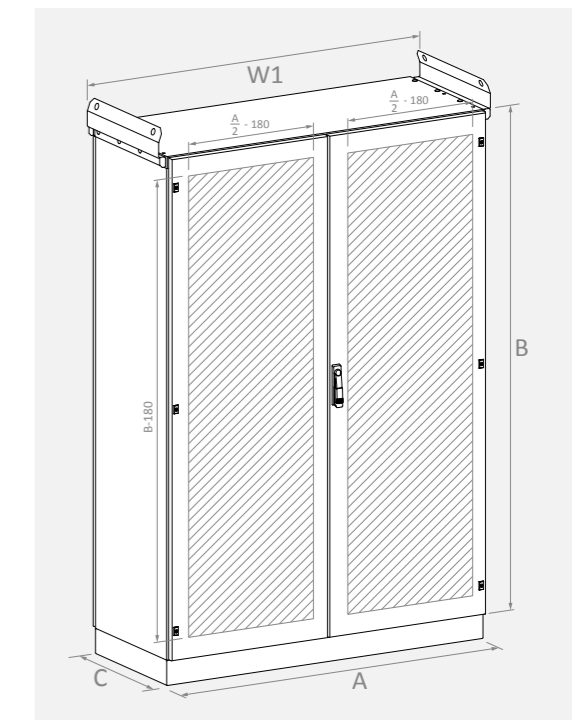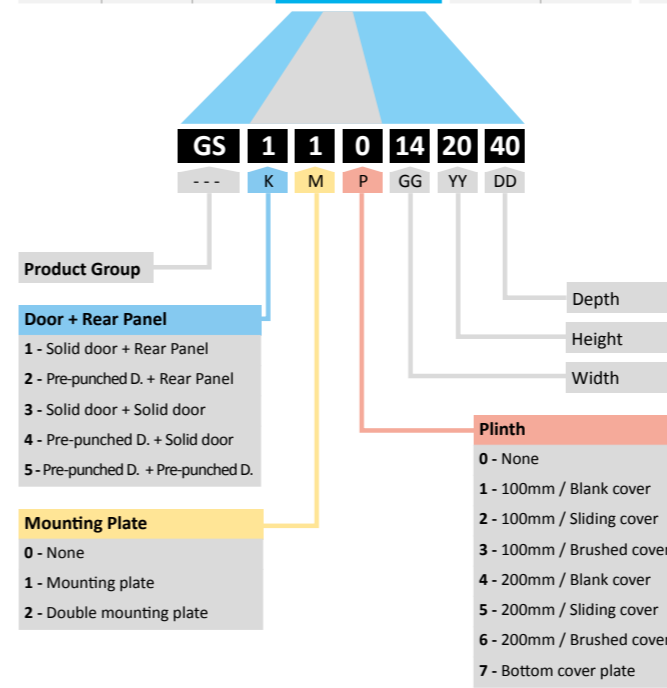

Width A	Height B	Depth C	Reference	Mounting Plate 1		Mounting Plate 2	
				↔ mm	↕ mm	↔ mm	↕ mm
1400	1800	400	GS xxx 141840	1300	600	1300	1100
		500	GS xxx 141850	1300	600	1300	1100
		600	GS xxx 141860	1300	600	1300	1100
		800	GS xxx 141880	1300	600	1300	1100
	2000	400	GS xxx 142040	1300	800	1300	1100
		500	GS xxx 142050	1300	800	1300	1100
		600	GS xxx 142060	1300	800	1300	1100
		800	GS xxx 142080	1300	800	1300	1100
1600	1800	400	GS xxx 161840	1500	600	1500	1100
		500	GS xxx 161850	1500	600	1500	1100
		600	GS xxx 161860	1500	600	1500	1100
		800	GS xxx 161880	1500	600	1500	1100
	2000	400	GS xxx 162040	1500	800	1500	1100
		500	GS xxx 162050	1500	800	1500	1100
		600	GS xxx 162060	1500	800	1500	1100
		800	GS xxx 162080	1500	800	1500	1100



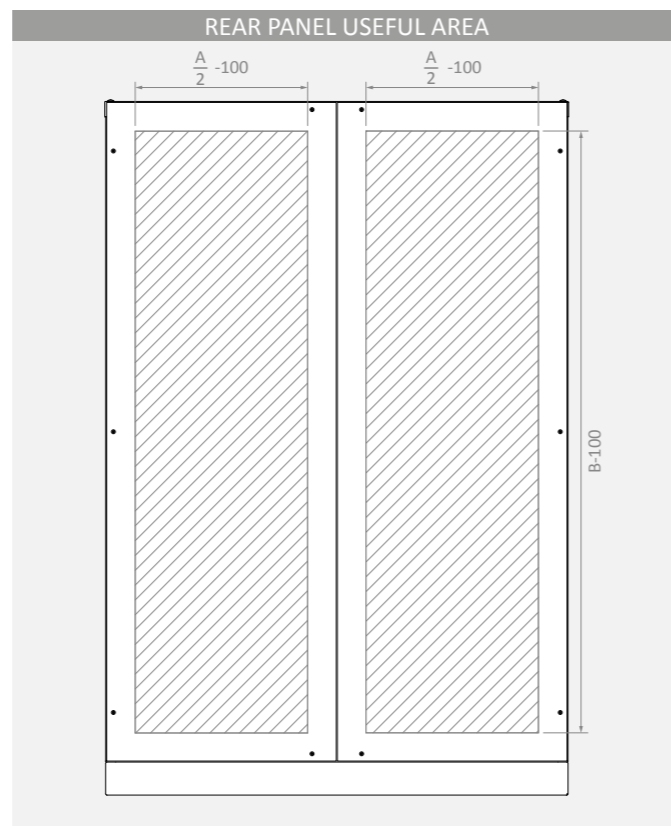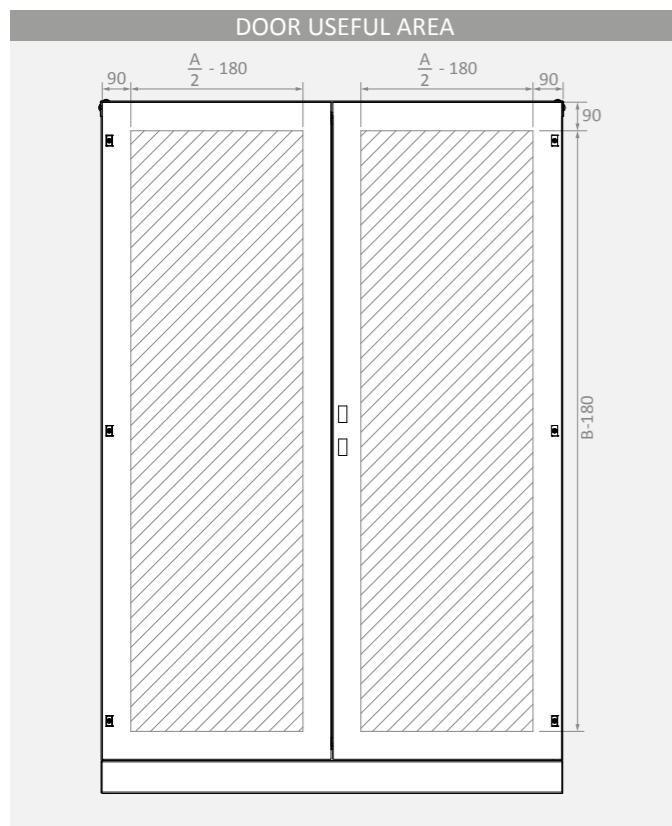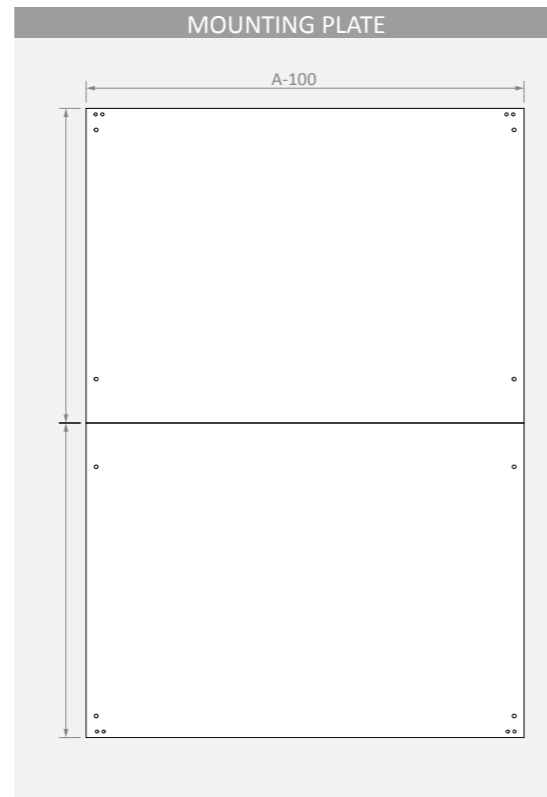

SOLID DOOR


Reference	Width		Height		Useful Area			Door pcs	Lock Type *	Hinge pcs	Weight kg
	A mm	B mm	W11 mm	W12 mm	H1 mm						
GS KP 1418	1400	1800	520	520	1620	2	I	3+3	40		
GS KP 1420	1400	2000	520	520	1820	2	I	3+3	44.8		
GS KP 1618	1600	1800	620	620	1620	2	I	3+3	46		
GS KP 1620	1600	2000	620	620	1820	2	I	3+3	51.2		

Characteristics

Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes

- Lock
  - Hinges
  - Double door gutter gasket
- \* I: Escutcheon Rod-latch

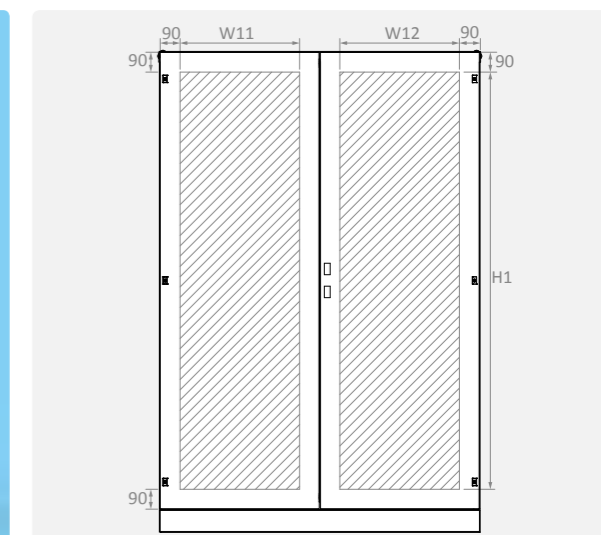

REAR PANEL


Reference	Width		Height		Useful Area			Hinge pcs	Weight kg
	A mm	B mm	W11 mm	W12 mm	H1 mm				
GS ST 1418	1400	1800	600	600	1700	3+3	30.2		
GS ST 1420	1400	2000	600	600	1800	3+3	33.6		
GS ST 1618	1600	1800	700	700	1700	3+3	34.5		
GS ST 1620	1600	2000	700	700	1800	3+3	38.4		

Characteristics

Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm


Supply Includes

- Rear panel fasteners

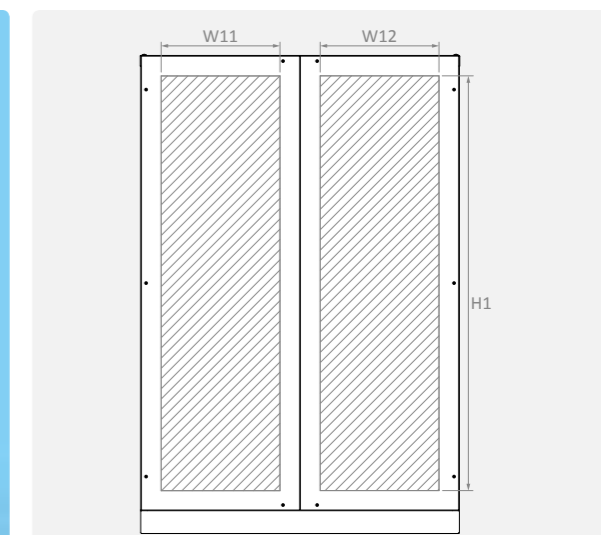

MOUNTING PLATE

Reference	Width	Wide	Length	Connection	Weight	Characteristics	
	A mm	X1 mm	Y1 / Y2 mm			Material	DIN EN 10327 DX51D+Z galvanized
GS TS 1406	1400	1300	600	4	12.4	Thickness	2 mm
GS TS 1408	1400	1300	800	4	16.6	Supply Includes	
GS TS 1411	1400	1300	1100	4	22.8	■ Mounting screws	
GS TS 1606	1600	1500	600	4	14.4	■ Carriage slide support and fasteners	
GS TS 1608	1600	1500	800	4	19.2		
GS TS 1611	1600	1500	1100	4	26.4		

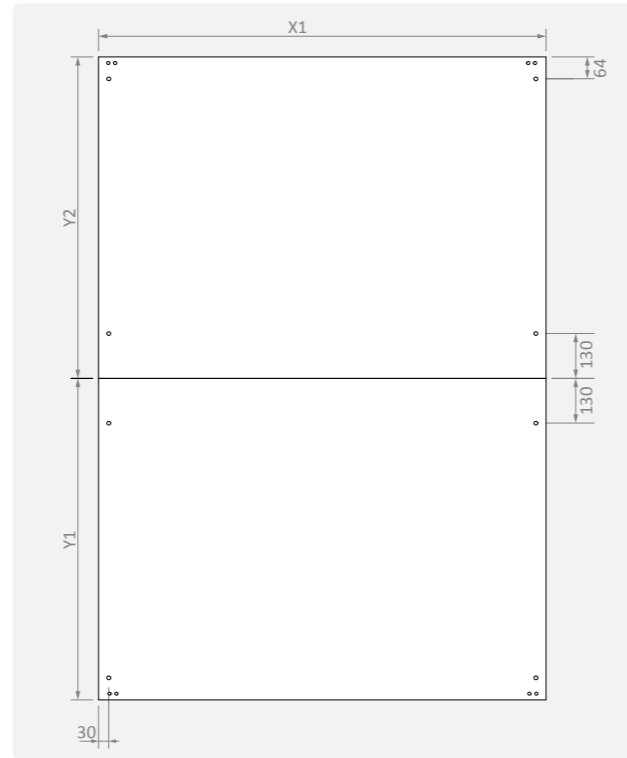


Mounting Plate	Reference															
	GS 141840	GS 141850	GS 141860	GS 141880	GS 142040	GS 142050	GS 142060	GS 142080	GS 161840	GS 161850	GS 161860	GS 161880	GS 162040	GS 162050	GS 162060	GS 162080
GS TS 1406	1	1	1	1												
GS TS 1408					1	1	1	1								
GS TS 1411	1	1	1	1	1	1	1	1								
GS TS 1606									1	1	1	1				
GS TS 1608													1	1	1	1
GS TS 1611									1	1	1	1	1	1	1	1

\* Full height mounting plate consists of two separate mounting plates. Mounting plates can be used separately in different depths.

PLINTH

Reference	Width	Depth	Wide	Length	Height	Connection			Weight
	A mm	C mm	X1 mm	Z1 mm	Y1 mm	X2 mm	Z2 mm	Z21 mm	
GS B 14041	1400	400	1400	350	100	1370	200	100	--
GS B 14051	1400	500	1400	350	100	1370	200	100	--
GS B 14061	1600	600	1600	550	100	1370	400	200	--
GS B 14081	1600	800	1600	550	100	1370	400	200	--
GS B 16041	1400	400	1400	350	100	1570	200	100	--
GS B 16051	1400	500	1400	350	100	1570	200	100	--
GS B 16061	1600	600	1600	550	100	1570	400	200	--
GS B 16081	1600	800	1600	550	100	1570	400	200	--



Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Cover plates and mounting screws	
Surface Finishing	RAL7035w powder coating	Plinth mounting fasteners	
Thickness	2 mm		

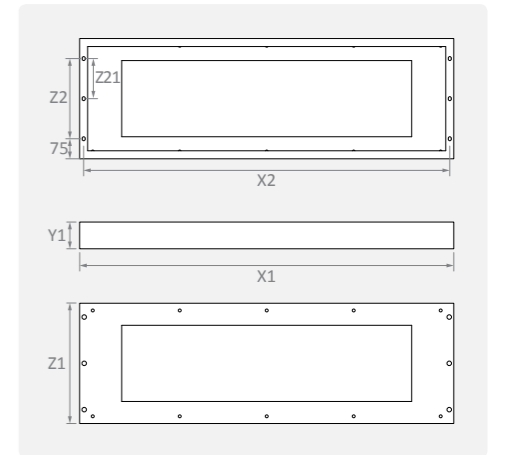

PLINTH COVERS

Reference	Width	Wide	Length	Apparent Area		Weight	Plinth Reference
	A mm	X1 mm	Z1 mm	X2 mm	Z2 mm		
GS BZU 1416 D	1400	557	158	460	60	--	GS B 14041, GS B 14051, GS B 14061, GS B 14081, GS B 16041, GS B 16051, GS B 16061, GS B 16081
GS BZU 1416 F	1400	557	158	460	60	--	GS B 14041, GS B 14051, GS B 14061, GS B 14081, GS B 16041, GS B 16051, GS B 16061, GS B 16081
GS BZU 1426 D	1600	557	216	460	60	--	GS B 14041, GS B 14051, GS B 14061, GS B 14081, GS B 16041, GS B 16051, GS B 16061, GS B 16081
GS BZU 1426 F	1600	557	216	460	60	--	GS B 14041, GS B 14051, GS B 14061, GS B 14081, GS B 16041, GS B 16051, GS B 16061, GS B 16081

Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm	AKFR0100 30 mm Brush; 460 mm	
		(for GS BZU 1416 F ve GS BZU 1426 F)	

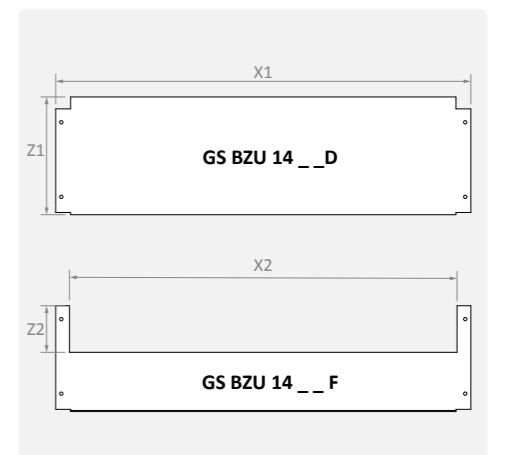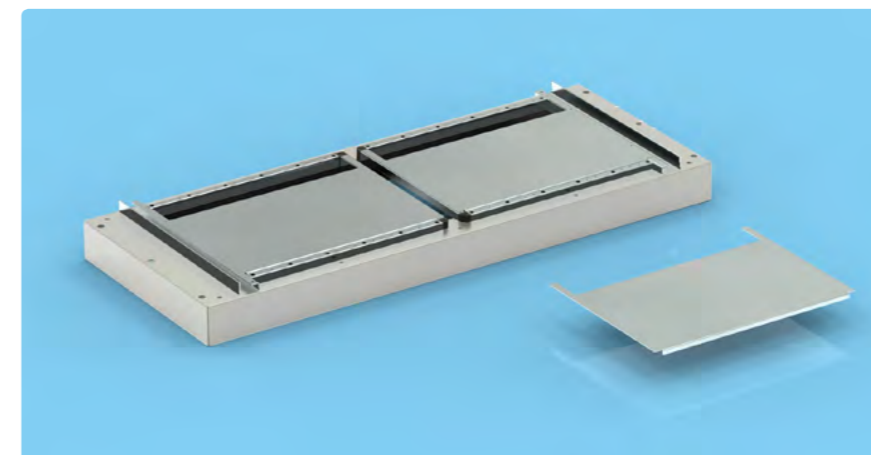


RAIN CANOPY

Reference	Width		Depth		Weight
	A mm	C mm	X1 mm	Z1 mm	
GS SP 1440	1400	400	1450	440	--
GS SP 1450	1400	500	1450	540	--
GS SP 1460	1600	600	1450	640	--
GS SP 1480	1600	800	1450	840	--
GS SP 1640	1400	400	1650	440	--
GS SP 1650	1400	500	1650	540	--
GS SP 1660	1600	600	1650	640	--
GS SP 1680	1600	800	1650	840	--

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Mounting screws	

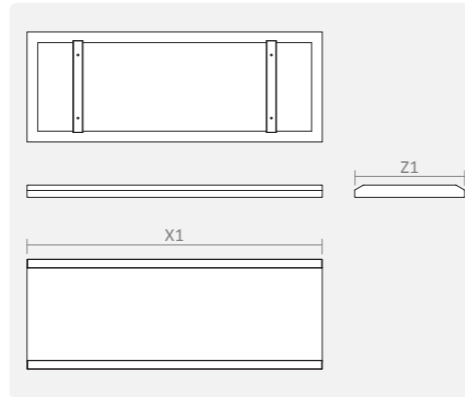


LIFTING PROFILE

Reference	Depth		Length		Connection	Packet	Weight
	C mm	Z1 mm	D2 mm	pcs / packet			
GS TP 040	400	350	232	2	--		
GS TP 050	500	450	332	2	--		
GS TP 060	600	550	432	2	--		
GS TP 080	800	750	632	2	--		

Characteristics	
Material	DIN EN 10025 S235JR
Surface Finishing	RAL7035w powder coating
Thickness	4 mm

Supply Includes	
Mounting screws	

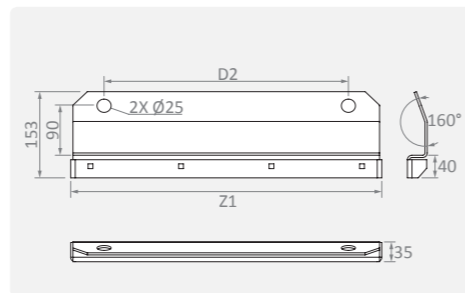


SIDE RAILS

Reference	Depth		Length		Connection		Weight
	C mm	Z1 mm	Z2 mm	Z3 mm	mm	mm	
AS SR 040	400	224	211	192	0.2		
AS SR 050	500	324	311	292	0.3		
AS SR 060	600	424	411	392	0.4		
AS SR 080	800	624	611	592	0.6		

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

Supply Includes	
Mounting screws	

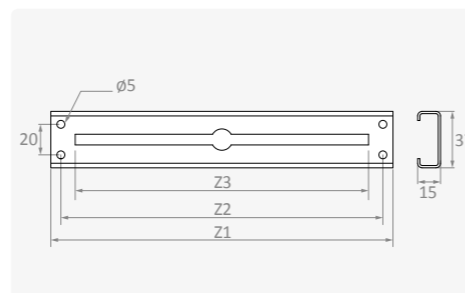


PLAN POCKETS

Reference	Width		Length		Weight
	A mm	X1 mm	Y1 mm	Z1 mm	
AS PJ 040	All Dimensions	A4	200	30	0.4
AS PJ 060	600/1200	A3	240	60	1.9
AS PJ 080	800	A3	240	60	2.6

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Mounting fasteners to fix door reinforcement frame	

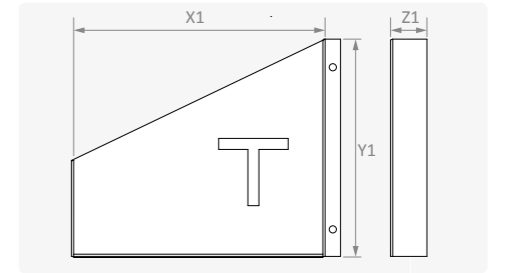


CARRIAGE SLIDE

Reference	Depth		Length		Connection	Weight
	C mm	Z1 mm	Z2 mm	pcs		
AS KK 040	400	274	211	12	0.2	
AS KK 050	500	374	311	17	0.3	
AS KK 060	600	474	411	22	0.4	
AS KK 080	800	674	611	32	0.5	

Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	1.5 mm

Supply Includes	
Mounting screws	

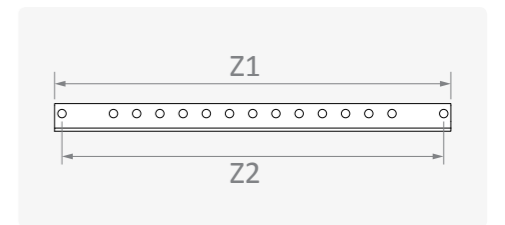

MOUNTING PLATE FIXING BRACKETS

Reference	Type	Connection	Weight
			kg
AS FB 010 L	Side Connection	Left	0.1
AS FB 010 R	Side Connection	Right	0.1
AS FB 010 FD L	Front Connection	Left	0.2
AS FB 010 FD R	Front Connection	Right	0.2
AS FB 010 F	Front Connection	Right/Left	0.2




Characteristics	
Material	DIN EN 10327 DX51D+Z galvanized
Thickness	2 mm

Supply Includes	
Side rail mounting fasteners	

SLIDE SUPPORT

Reference	Weight		Characteristics	
	kg	kg	Material	% 30 Fibre glass reinforced nylon 6
HD PA00000040	0.04		Supply Includes	Slide support
				M6x... Screws

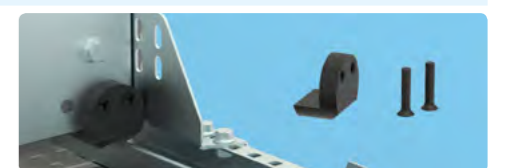

EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm <sup>2</sup>				
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500	Nickel plated, braided copper conductor	16	320	M8-M8	50	0.2

