

Characteristics

- Material**
 Sheet Steel (EN 10130 DC01)
 ■ Body : 1.5 mm
 ■ Panel : 1.5 mm
 ■ Glazed door : 2 mm
 ■ Plinth : 2 mm
 Galvanized Steel (EN 10346 DX51D+Z)
 ■ 19" profile : 2 mm
- Surface Finishing**
 ■ RAL7035w powder coating
- IP Rating**
 ■ IP55 (TS 3033, EN 60529)
- Others**
 ■ Swing-handle polyamide lock
 ■ Foamed-in door PU sealing gasket



On Request

- Special sizes
- Special Racks
- Special colour
- Special mounting plate
- Pre-punching







Supply Includes

- Front and rear frame
- Glazed door and rear panel
- Side panels
- Depth adjustable 19" profiles
- 4/6 pcs side rails
- Top cover
- Plinth

Complementary Accessories

- Levelling feet
- Castor
- Top protection plate
- Top and bottom partial cover plates
- Power distribution unit
- 19" pull out perforated shelf
- Cable clamp profile
- Side rail
- Mounting plate
- Telescopic slide
- Locks
- Earthing cable
- 19" equipment shelf
- Swing frame
- Patch panel and 1U fan unit
- Cable organizer

Height units	Width			Reference	Lock	Hinge	Apparent Area		Useful Area						Weight	
	A	B	C				Side Panel		Rear Panel		Top Cover					
	mm	mm	mm				↔	↕	↔	↕	↔	↗				
32 U	600	1500	400	EC 061540	1	3	397	1097	194	580	580	510	1410	550	194	87
			500	EC 061550	1	3	397	1097	294	580	580	510	1410	550	294	93
			600	EC 061560	1	3	397	1097	394	580	580	510	1410	550	394	98
			800	EC 061580	1	3	397	1097	594	580	580	510	1410	550	594	110
39 U	600	1800	400	EC 061840	1	3	397	1397	194	720	740	510	1710	550	194	101
			500	EC 061850	1	3	397	1397	294	720	740	510	1710	550	294	108
			600	EC 061860	1	3	397	1397	394	720	740	510	1710	550	394	114
			800	EC 061880	1	3	397	1397	594	720	740	510	1710	550	594	127
43 U	600	2000	400	EC 062040	1	3	397	1597	194	840	820	510	1910	550	194	111
			500	EC 062050	1	3	397	1597	294	840	820	510	1910	550	294	118
			600	EC 062060	1	3	397	1597	394	840	820	510	1910	550	394	124
			800	EC 062080	1	3	397	1597	594	840	820	510	1910	550	594	138

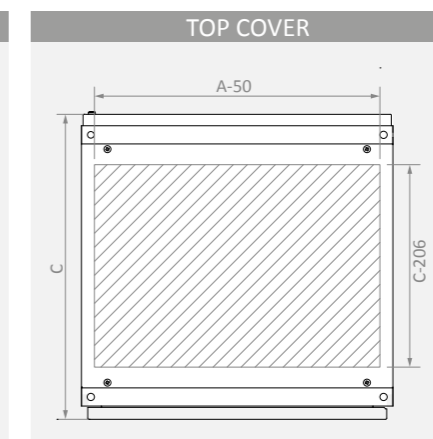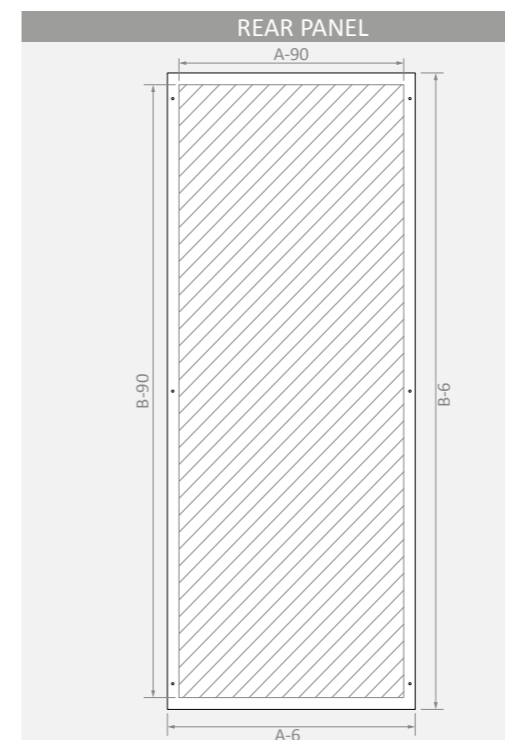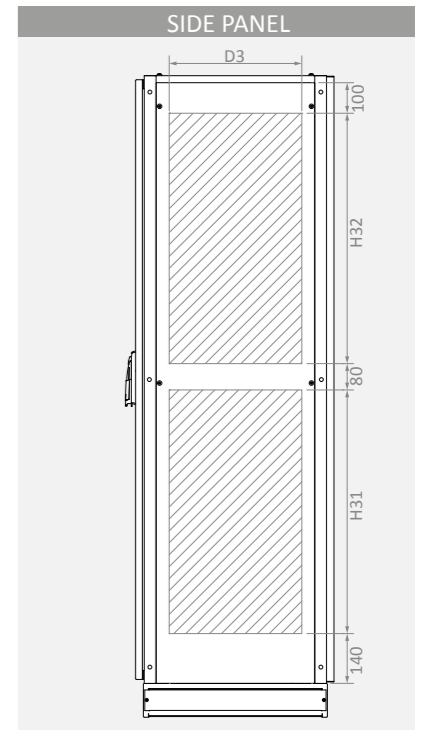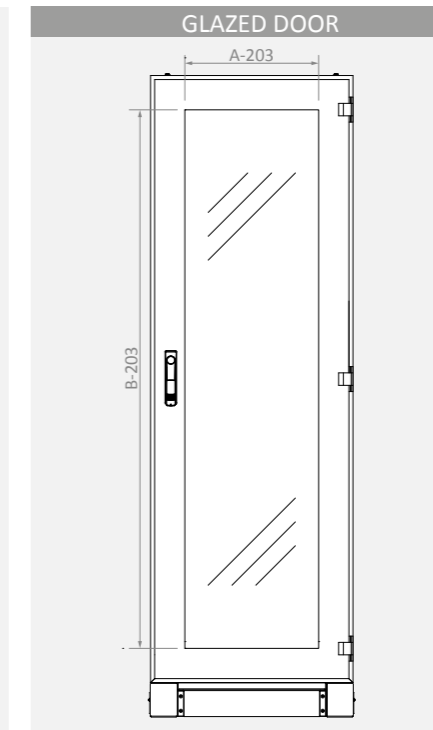


GLAZED DOOR

Reference	Width		Wide	Length	Apparent Area		Door	Lock Type	Hinge	Weight
	A	B			W6	H6				
	mm	mm	mm	mm	mm	mm	pcs	*	pcs	kg
AS KPX 0615	600	1500	576	1476	397	1297	1	I	3	14.3
AS KPX 0618	600	1800	576	1776	397	1597	1	I	3	17.0
AS KPX 0620	600	2000	576	1976	397	1797	1	I	3	18.5

Characteristics	
Material	DIN EN 10130 DC01 CCRS / 4 mm tempered glass
Surface Finishing	RAL7035w powder coating
Thickness	2 mm

Supply Includes	
Lock	
Hinges	
* I: Rod-latch	

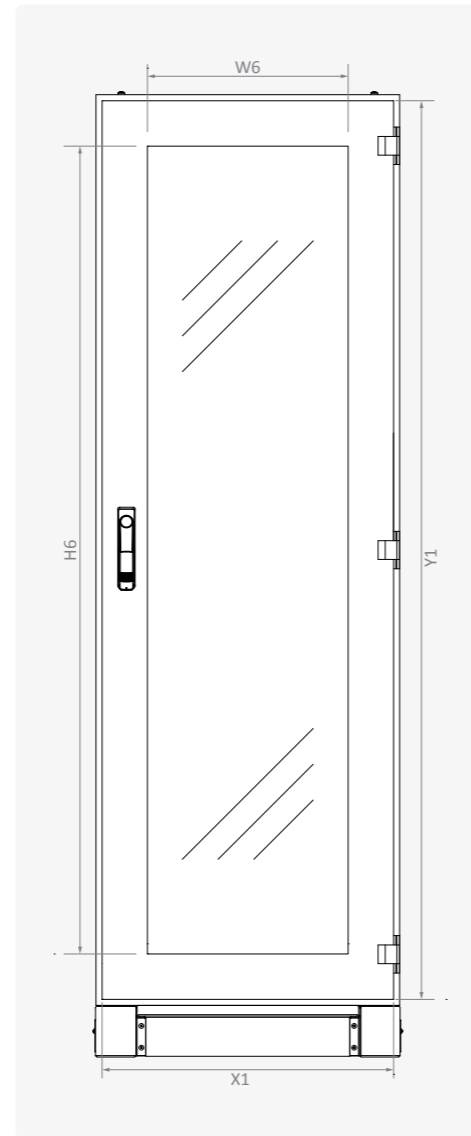


REAR PANEL

Reference	Width		Wide	Length	Useful Area		Weight
	A	B			W1	H1	
	mm	mm	mm	mm	mm	mm	kg
AS ST 0615	600	1500	594	1494	510	1410	11.5
AS ST 0618	600	1800	594	1794	510	1710	13.8
AS ST 0620	600	2000	594	1994	510	1910	15.4

Characteristics	
Material	DIN EN 10130 DC01 CCRS
Surface Finishing	RAL7035w powder coating
Thickness	1.5 mm

Supply Includes	
Rear panel fasteners	

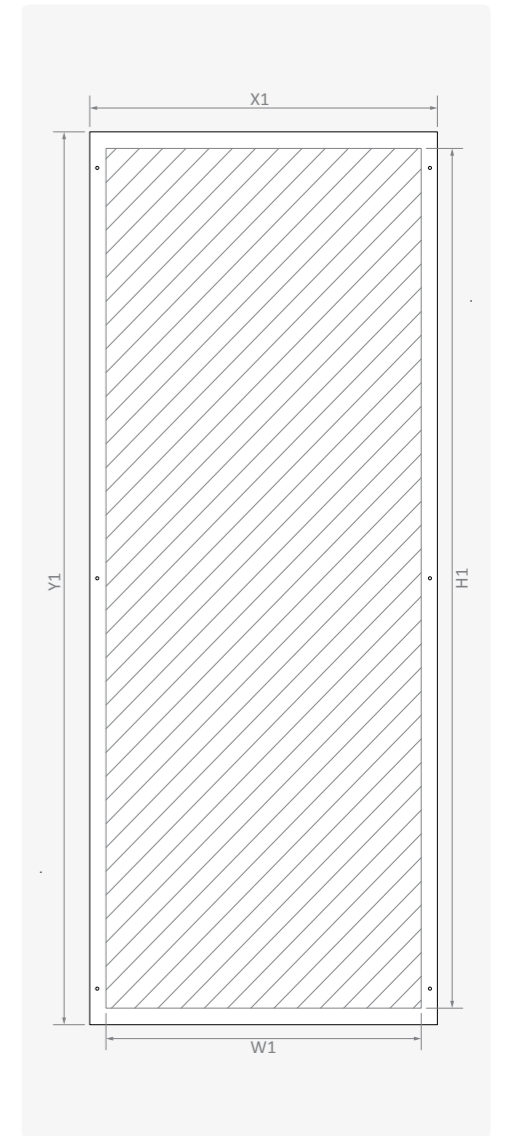

SIDE PANEL


Reference	Height	Depth	Wide		Useful Area			Weight kg
	B mm	C mm	X1 mm	Y1 mm	D3 mm	H31 mm	H32 mm	
AS YS 1540	1500	400	270	1480	194	580	580	5.4
AS YS 1550	1500	500	370	1480	294	580	580	7.3
AS YS 1560	1500	600	470	1480	394	580	580	9.1
AS YS 1840	1800	400	270	1780	194	720	740	6.5
AS YS 1850	1800	500	370	1780	294	720	740	8.7
AS YS 1860	1800	600	470	1780	394	720	740	10.8
AS YS 1880	1800	800	670	1780	594	720	740	15.4
AS YS 2040	2000	400	270	1980	194	840	820	7.5
AS YS 2050	2000	500	370	1980	294	840	820	9.6
AS YS 2060	2000	600	470	1980	394	840	820	12
AS YS 2080	2000	800	670	1980	594	840	820	16.9

Characteristics

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 1.5 mm

Supply Includes

- Side / Top panel mounting screw set

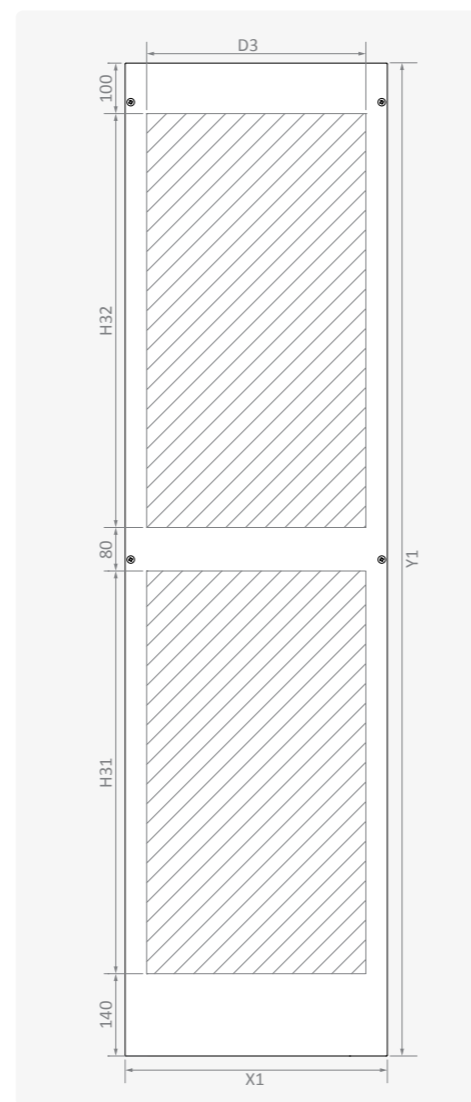

TOP COVER


Reference	Width	Depth	Wide		Useful Area	Weight kg
	A mm	C mm	X1 mm	Z1 mm		
AS TAV 060 40	600	400	600	270	X2: 550, Z2: 194	2.4
AS TAV 060 50	600	500	600	370	X2: 550, Z2: 294	3.3
AS TAV 060 60	600	600	600	470	X2: 550, Z2: 294	4.0
AS TAV 060 80	600	800	600	670	X2: 550, Z2: 594	5.7

Characteristics

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 1.5 mm

Supply Includes

- Side / Top panel mounting screw set

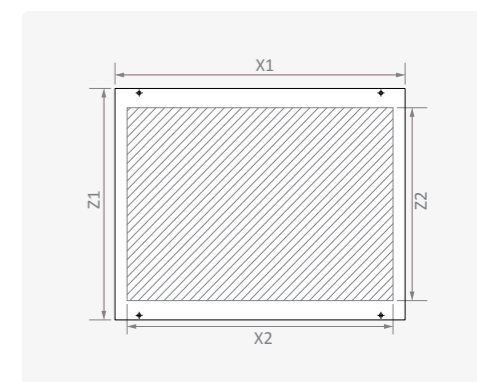

PLINTH


Reference	Width	Depth	Wide		Length		Connection			Weight kg
	A mm	C mm	X1 mm	Z1 mm	Y1 mm	X2 mm	Z2 mm	Z21 mm		
AS Bx000604 1	600	400	600	345	100	525	200	100	8.1	
AS Bx000605 1	600	500	600	445	100	525	300	150	9.4	
AS Bx000606 1	600	600	600	545	100	525	400	200	10.8	
AS Bx000608 1	600	800	600	745	100	525	600	300	13.4	
AS Bx000604 2	600	400	600	345	200	525	200	100	9.8	
AS Bx000605 2	600	500	600	445	200	525	300	150	11.1	
AS Bx000606 2	600	600	600	545	200	525	400	200	12.5	
AS Bx000608 2	600	800	600	745	200	525	600	300	15.1	

Characteristics

- Material: DIN EN 10130 DC01 CCRS
- Surface Finishing: RAL7035w powder coating
- Thickness: 2 mm


Supply Includes

- Cover plates and mounting screws
- Plinth mounting fasteners

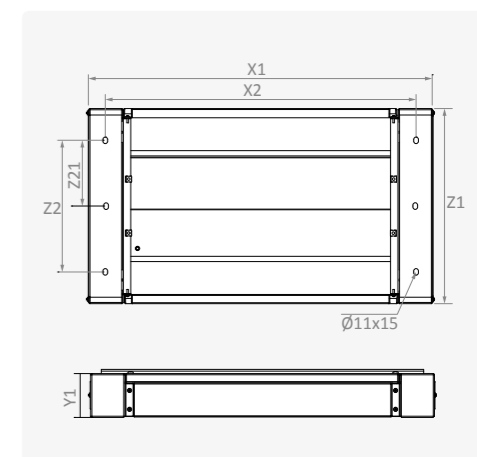

19" PROFILES

Reference	Length	Height	Characteristics
		B mm	
EC PR1500	32 U	1500	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 2 mm * 1U = 44.45 mm
EC PR1800	39 U	1800	
EC PR2000	43 U	2000	

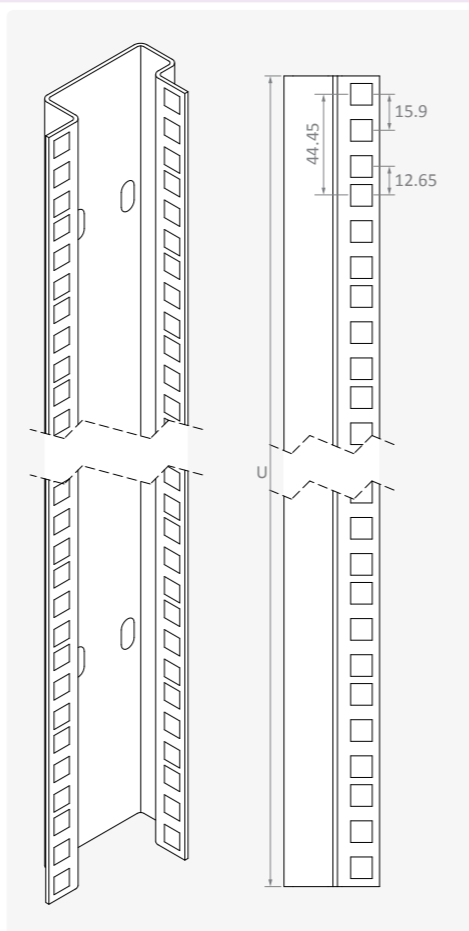


19" ADJUSTABLE PERFORATED SHELF

Reference	Depth	Characteristics
	C mm	
PEC RPA0640	400	■ Material DIN EN 10130 DC01 CCRS ■ Surface Finishing RAL7035w powder coating ■ Thickness 1.5 mm Supply Includes ■ Mounting fasteners
PEC RPA0650	500	
PEC RPA0660	600	
PEC RPA0680	800	




PULL OUT SHELVES

Reference	Width	Depth	Wide	Length	Extension	Loading Capacity	Weight	Characteristics
	A mm	C mm	X1 mm	Z1 mm	Z2 mm	kg	kg	
EC RPT 0640	600	400	490	235	200	30	2.0	■ Material DIN EN 10130 DC01 CCRS ■ Surface Finishing RAL7035w powder coating ■ Thickness 1.5 mm Supply Includes ■ Shelf ■ Pull out side rails ■ Connection profiles and mounting fasteners
EC RPT 0650	600	500	490	335	300	30	2.6	
EC RPT 0660	600	600	490	435	400	30	3.2	
EC RPT 0680	600	800	490	635	600	30	4.5	

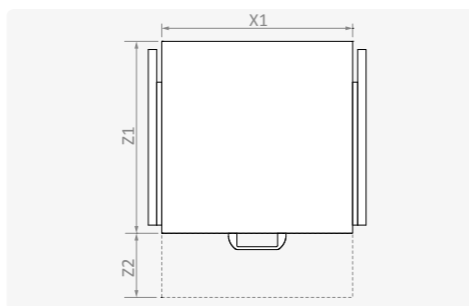

SIDE RAILS

Reference	Depth	Length	Connection		Weight kg	Characteristics
	C mm	Z1 mm	Z2 mm	Z3 mm		
AS SR 040	400	224	211	192	0.2	■ Material DIN EN 10327 DX51D+Z galvanized ■ Thickness 1.5 mm Supply Includes ■ Mounting screws
AS SR 050	500	324	311	292	0.3	
AS SR 060	600	424	411	392	0.4	
AS SR 080	800	624	611	592	0.6	

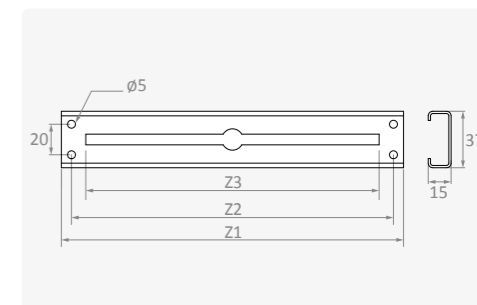


EYE BOLT

Reference	Connection	Int. Diameter	Packet	Weight
			pcs/packet	
AS AH 020	M12	∅ 30	4	1.0

Characteristics

- Material C15E Forged steel
- Surface Finishing Zinc coated Cr+3 passivation
- Standards DIN 580

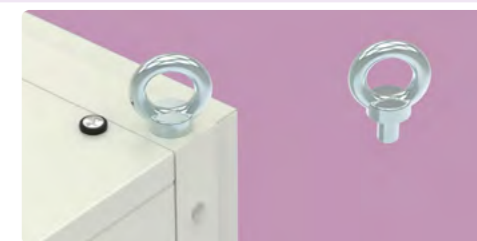

LOCKS & HINGES

Reference	Description
KIEMANKQ0PS2M0	AS Lock
MNAS000010	AS Hinge
KIMS1661221	Cover plate lock
MNMS299121	Cover plate hinge



SPECIAL LOCKS AND KEYS

Reference	Key Type	Key Code
KIMS0601115211	5mm Double-bit	KI AN 0100
KIMS065110522	6,5mm Triangular	KIMSN06737
KIMS0621122	8mm Triangular	KIMSN06738
KIMS0622021	7mm Square	KIMSN06727
KIEMD5KQ0ZS2M1	Special	KIEM100441
KIEMKEZQ0ZS2M0	Padlock	

EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
		mm ²				
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50 pcs/packet	0.2 kg/packet
KB TP 16093500		16	320	M8-M8	50	0.2

